



AME8753

500mA / 500mA Dual CMOS LDO Regulator

Low Dropout


General Description

The AME8753 dual, low dropout, linear regulators operate from $V_{OUT} + V_{DROPOUT}$ to 5.5V input and deliver up to 500mA / 500mA output current each. Low dropout voltage and low quiescent current (70 μ A typ.) make them ideal for battery applications.

The AME8753 is available with a wide variety of voltage options as standard and can be trimmed to 2% accuracy.

For protection purpose, AME8753 has both thermal shut-down and current fold-back to prevent device failure under the "Worst" operating conditions.

Functional Block Diagram

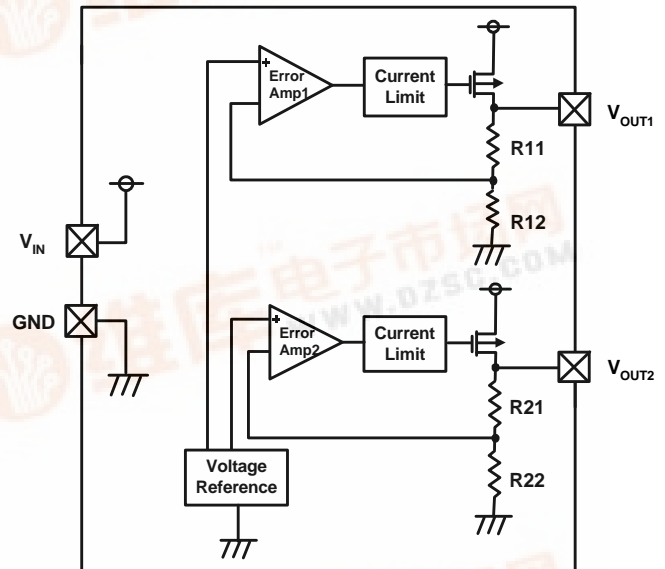

Features


- Very Low Dropout Voltage
- Guaranteed 500mA / 500mA Each Output
- Accurate to within 2% for both outputs
- Typical 70 μ A Quiescent Current
- Over-Temperature Shutdown
- Current Limiting
- Short Circuit Current Fold-back
- All AME's Lead Free Products Meet RoHS Standards

Applications

- Cellular Phones
- Palm / Notebook
- Battery Power Equipment
- Handheld Instruments


Typical Applications

Fixed Version

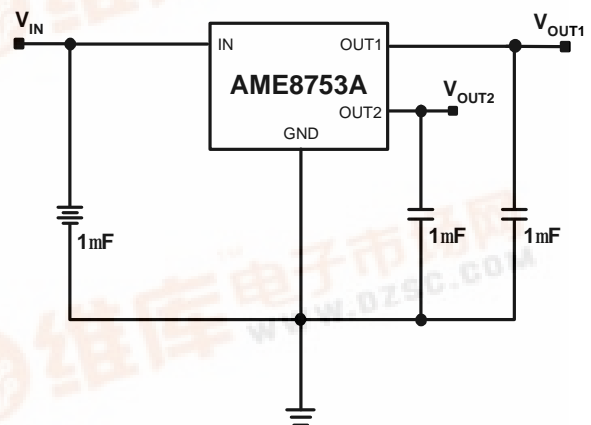



Pin Configuration

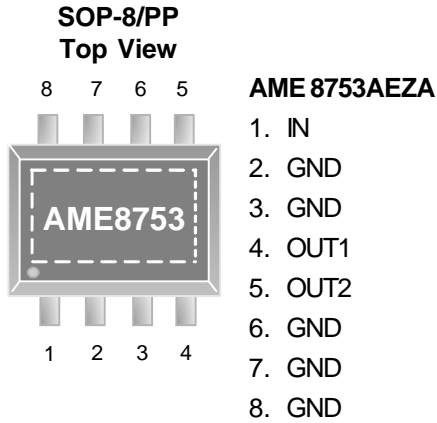

* Die Attach:

Conductive Epoxy

Note: The area enclosed by dashed line represents Exposed Pad and connection to GND.

Pin Description

Pin Number	Pin Name	Description
1	IN	Regulator Input. Supply voltage can range from Higher $V_{OUT} + V_{DROPOUT}$ to 5.5V. This input also supplies the on-chip reference. Bypass with 1 μ F capacitor to GND.
2	GND	Ground. This pin also functions as heatsink. Solder to a large pad or the circuit-board ground plane to maximize thermal dissipation.
3	GND	Ground. This pin also functions as heatsink. Solder to a large pad or the circuit-board ground plane to maximize thermal dissipation.
4	OUT1	Regulator 1 Output. Sources up to 500mA continuous current. Bypass with a 1 μ F (< 0.5 Ω typ ESR) capacitor to GND.
5	OUT2	Regulator 2 Output. Sources up to 500mA continuous current. Bypass with a 1 μ F (< 0.5 Ω typ ESR) capacitor to GND.
6	GND	Ground. This pin also functions as heatsink. Solder to a large pad or the circuit-board ground plane to maximize thermal dissipation.
7	GND	Ground. This pin also functions as heatsink. Solder to a large pad or the circuit-board ground plane to maximize thermal dissipation.
8	GND	Ground. This pin also functions as heatsink. Solder to a large pad or the circuit-board ground plane to maximize thermal dissipation.




AME, Inc.

Low Dropout

AME8753

500mA / 500mA Dual CMOS LDO Regulator

Ordering Information

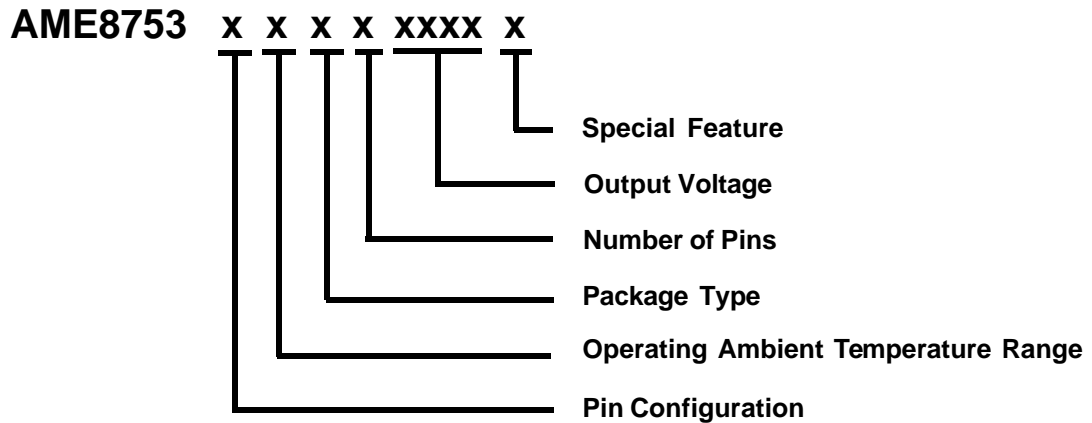

Pin Configuration	Operating Ambient Temperature Range	Package Type	Number of Pins	Output Voltage (Both LDOs)	Special Feature
A (SOP-8/PP) 1. IN 2. GND 3. GND 4. OUT1 5. OUT2 6. GND 7. GND 8. GND	E: -40°C to 85°C	Z: SOP/PP	A: 8	2533: V _{OUT1} =2.5V V _{OUT2} =3.3V	Z: Lead free

Ordering Information

Part Number	Marking*	Output Voltage	Package	Operating Ambient Temperature Range
AME8753AEZA2533Z	AME8753 AEZA2533 yyww	V _{OUT1} =2.5V V _{OUT2} =3.3V	SOP-8/PP	- 40°C to 85°C

Note:yyww represents date code .

* a line on top of the first letter represents lead free plating such as \bar{A} ME8753.

Please consult AME sales office or authorized Rep./Distributor for voltage accuracy and package type availability.



AME, Inc.

Low Dropout

AME8753

500mA / 500mA Dual CMOS LDO Regulator

■ Absolute Maximum Ratings

Parameter	Maximum	Unit
Input Voltage	-0.3 to 6	V
Output Voltage	-0.3 to $V_{IN} + 0.3$	V
Output Current	$P_D / [2V_{IN} - (V_{OUT1} + V_{OUT2})]$	mA
ESD Classification	C*	

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device

* HBM C:4000V+

■ Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient Temperature Range	T_A	-40 to 85	°C
Junction Temperature Range	T_J	-40 to 125	°C
Storage Temperature Range	T_{STG}	-65 to 150	°C

■ Thermal Information

Parameter	Package	Die Attach	Symbol	Maximum	Unit
Thermal Resistance * (Junction to Case)	SOP-8/PP	Conductive Epoxy	θ_{JC}	19	°C / W
Thermal Resistance (Junction to Ambient)			θ_{JA}	84	
Internal Power Dissipation			P_D	1450	mW
Maximum Junction Temperature				150	°C
Solder Iron (10 Sec)**				350	°C

* Measure θ_{JC} on center of molding compound if IC has no tab.

** MIL-STD-202G 210F

■ Electrical Specifications

Unless specified: $T_J=25^\circ\text{C}$, $V_{IN}=\text{Higher } V_{OUT}+1\text{V}$, $I_{OUT1}=I_{OUT2}=1\text{mA}$, $C_{IN}=C_{OUT}=1\mu\text{F}$.
 Typical values are at $T_J=25^\circ\text{C}$

Parameter	Symbol	Test Condition	Min	Typ	Max	Units	
IN							
Input Supply Voltage	V_{IN}		Note1		5.5	V	
Quiescent Current	I_Q			70	160	μA	
OUT1, OUT2							
Output Voltage	V_{OUT}	$I_{OUT}=1\text{mA}$		-2%	2%	V	
		$0\text{mA}<I_{OUT}<=500\text{mA}$, $V_{OUT}+1\text{V}<V_{IN}<5.5\text{V}$	$T_J=-40^\circ\text{C to }+125^\circ\text{C}$	-2.5%			2.5%
Line Regulation	REG_{LINE}	$V_{OUT}+1\text{V}<V_{IN}<5.5\text{V}$ $I_{OUT}=1\text{mA}$	$T_J=25^\circ\text{C}$	-0.2	0.2	% / V	
			$T_J=-40^\circ\text{C to }+125^\circ\text{C}$	-0.25	0.25		
Load Regulation	REG_{LOAD}	$1\text{mA}<I_{OUT}$	$T_J=-40^\circ\text{C to }+125^\circ\text{C}$	-0.005	± 0.0025	0.005	% / mA
Dropout Voltage	V_{DROP}	$I_{OUT1}=I_{OUT2}=500\text{mA}$ $(V_O=V_{O(NOM)}-2\%)$, $V_{O(NOM)}>=2.5\text{V}$	$T_J=-40^\circ\text{C to }+125^\circ\text{C}$			800	mV
Current Limit	I_{LIM}		700		1400	mA	
Short Circuit Current	I_{SC}			350	500		
Ripple Rejection	PSRR	$f=100\text{HZ}$, $I_{OUT}=1\text{mA}$			55	dB	
		$f=1\text{kHz}$, $I_{OUT}=1\text{mA}$			55		
		$f=10\text{kHz}$, $I_{OUT}=1\text{mA}$			48		
Output Voltage Noise	e_n	$f=1\text{kHz to }100\text{kHz}$, $C_{OUT}=1\mu\text{F}$			550	μV_{RMS}	
Over Temperature Protection							
Over Temperature Shutdown	OTS			150		$^\circ\text{C}$	
Over Temperature Hysteresis	OTH			20		$^\circ\text{C}$	

Note1: $V_{IN(\text{min})}=\text{Higher } V_{OUT}+V_{Dropout}$



■ Detailed Description

The AME8753 is low-dropout, low quiescent-current linear regulator designed primarily for battery-powered applications. These parts are available with preset output voltage ranging from 2.5V to 3.3V, and the parts can supply loads up to 500mA.

Internal P-Channel Pass Transistor

The AME8753 features two 1Ω P-Channel MOSFET pass transistors. A P-Channel MOSFET provides several advantages over similar designs using PNP pass transistors, including longer battery life. It requires no base drive, which reduces quiescent current significantly. The AME8753 only consume $70\mu\text{A}$ of quiescent current whether in dropout, light-load, or heavy-load applications.

Current Limit

The AME8753 contains two independent current limiters, one for each regulator, which monitor and control the pass transistor's gate voltage, limiting output current to 700mA minimum. The output can be shorted to ground for an indefinite time without damaging the part.

Thermal-Overload Protection

Thermal -overload protection limits total power dissipation in the AME8753. When the junction temperature exceeds $T_j=150^\circ\text{C}$, the thermal sensor signals the shutdown logic, turning off the pass transistor and allowing the IC to cool.

■ Application Information

Capacitor Selection and Regulator Stability

Use a $1\mu\text{F}$ capacitor on the AME8753 input and a $1\mu\text{F}$ capacitor on the outputs. Larger input capacitor values and lower ESRs provide better supply noise rejection and line transient response.

PSRR and Operation from Sources Other than Batteries

The AME8753 is designed to deliver low dropout voltages and low quiescent currents in battery powered systems. Power-supply rejection is 50dB at low frequencies.




AME, Inc.

AME8753


500mA / 500mA Dual CMOS LDO Regulator

Low Dropout


Quiescent Current vs Input Voltage

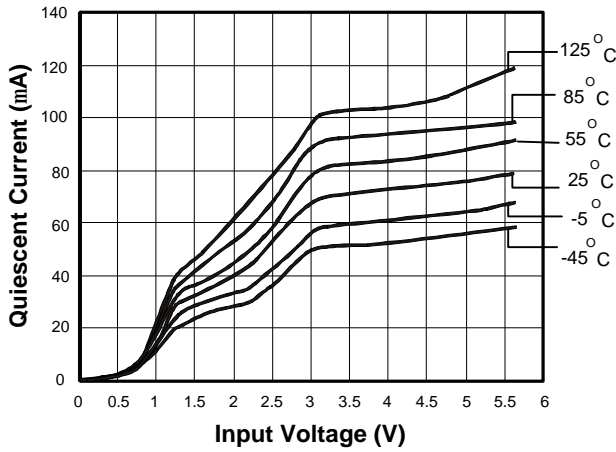


Channel-to-Channel Isolation (dB)

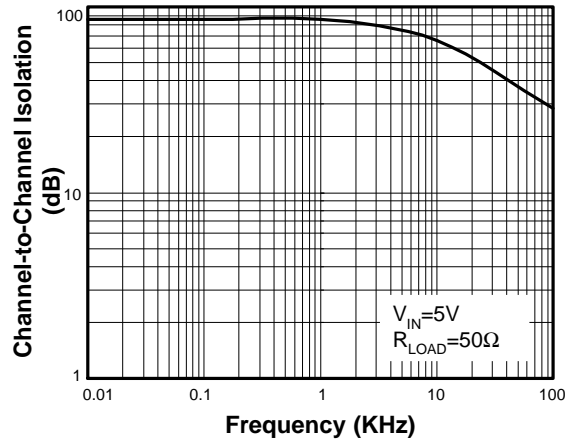


Quiescent Current vs Temperature

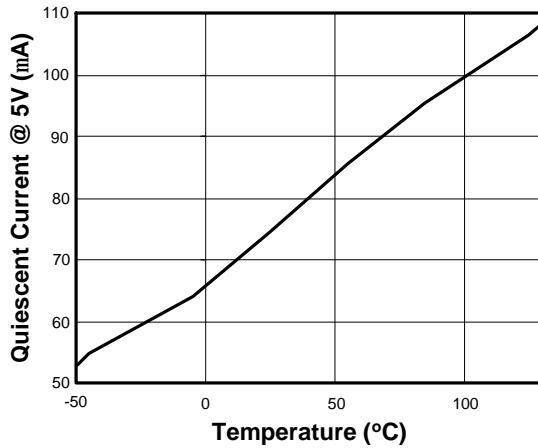


Output Noise Spectral Density

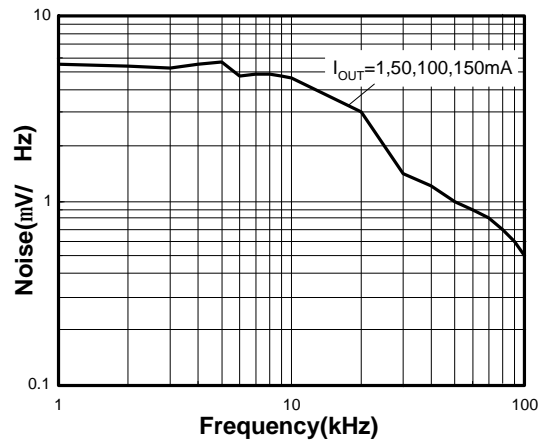

Dropout Voltage vs Load Current

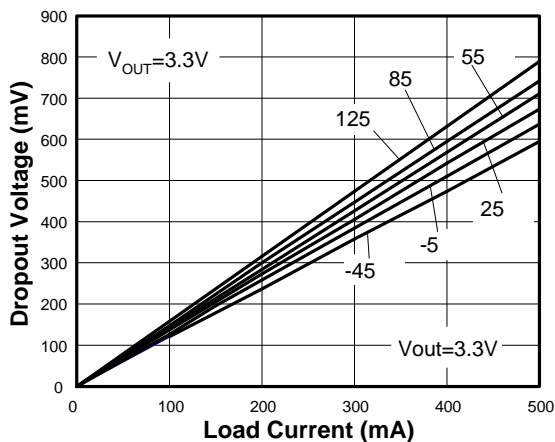

Line Transient

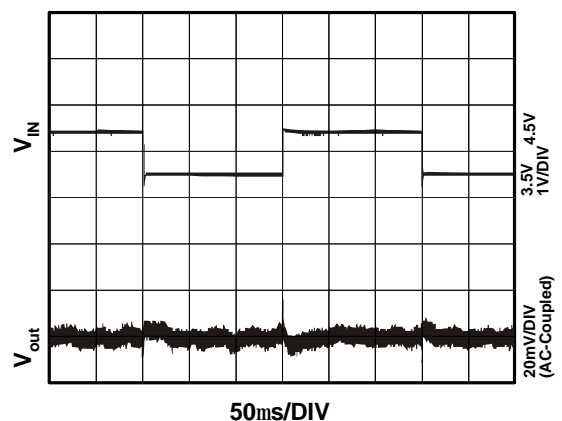




AME, Inc.

Low Dropout


AME8753

500mA / 500mA Dual CMOS LDO Regulator


Dropout Voltage vs Output Voltage

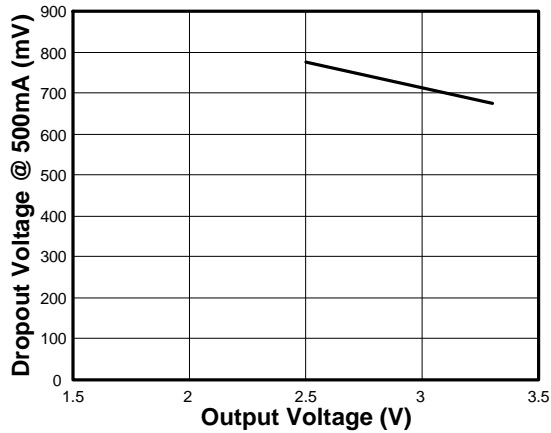


Output Voltage vs Temperature

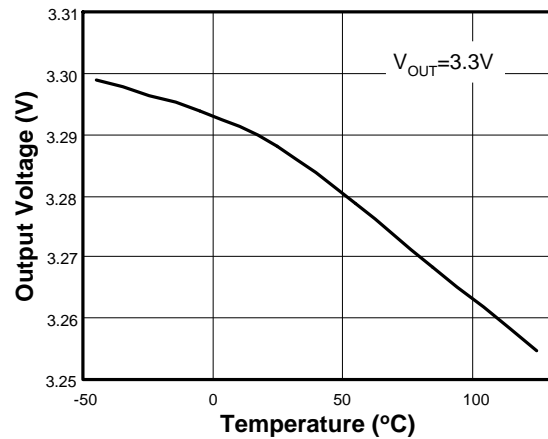


Supply Current vs Load Current

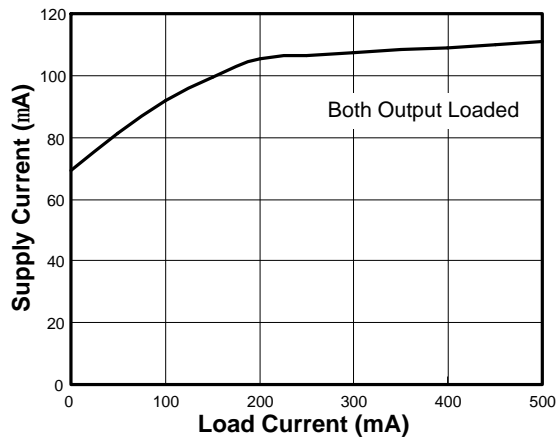


PSRR vs Frequency

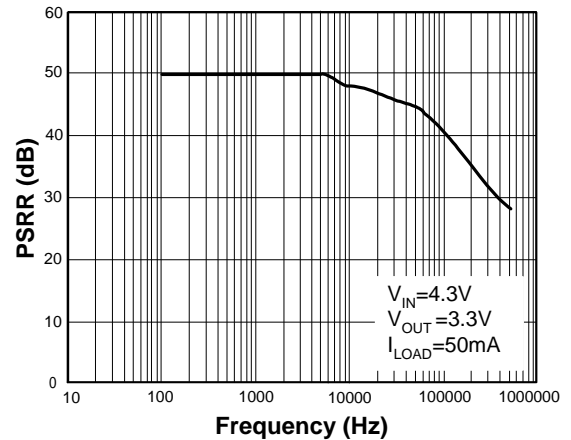

Load Transient

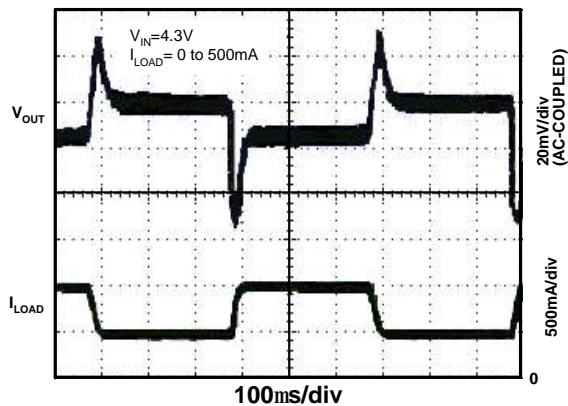

Load Transient Near Dropout

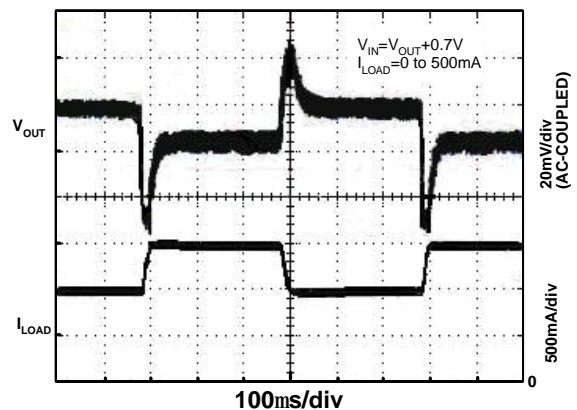



AME, Inc.


Low Dropout

AME8753

500mA / 500mA Dual CMOS LDO Regulator

■ Tape and Reel Dimension

SOP-8/PP

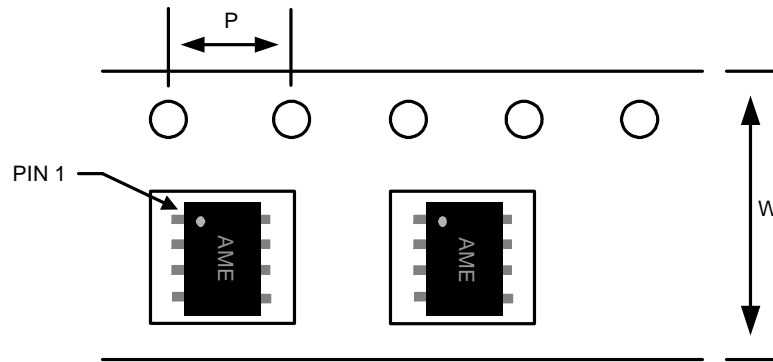

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOP-8/PP	12.0±0.1 mm	4.0±0.1 mm	2500pcs	330±1 mm



AME, Inc.


Low Dropout

AME8753

500mA / 500mA Dual CMOS LDO Regulator

■ Package Dimension

SOP-8/PP

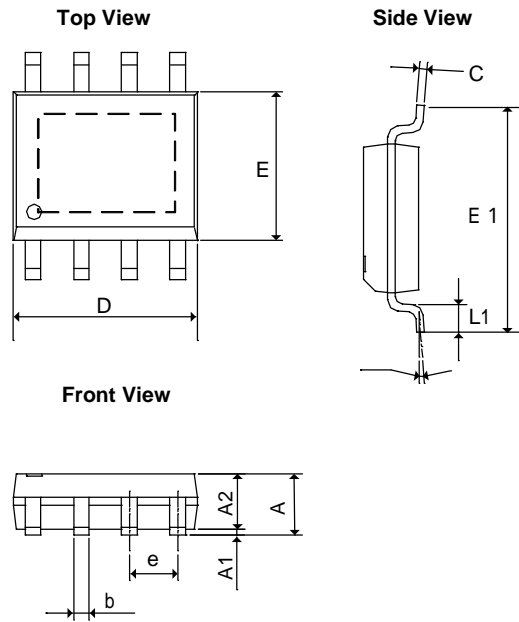

SYMBOLS	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	-	1.700	-	0.067
A ₁	0.050	0.150	0.002	0.006
A ₂	1.350	1.550	0.053	0.061
C	0.100	0.250	0.004	0.010
E	3.750	4.150	0.148	0.163
E1	5.700	6.300	0.224	0.248
L	0.300	0.700	0.012	0.028
b	0.310	0.510	0.012	0.020
D	4.720	5.120	0.186	0.202
e	1.270 BSC		0.05 BSC	
q	0°	8°	0°	8°



www.ame.com.tw
E-Mail: sales@ame.com.tw

Life Support Policy:

These products of AME, Inc. are not authorized for use as critical components in life-support devices or systems, without the express written approval of the president of AME, Inc.

AME, Inc. reserves the right to make changes in the circuitry and specifications of its devices and advises its customers to obtain the latest version of relevant information.

© AME, Inc. , February 2007

Document: 2075-DS8753-A.02

Corporate Headquarter
AME, Inc.

2F, 302 Rui-Guang Road, Nei-Hu District
Taipei 114, Taiwan.
Tel: 886 2 2627-8687
Fax: 886 2 2659-2989

U.S.A. (Subsidiary)
Analog Microelectronics, Inc.

3100 De La Cruz Blvd., Suite 201
Santa Clara, CA. 95054-2438
Tel : (408) 988-2388
Fax: (408) 988-2489