

Inchange Semiconductor

Product Specification

Silicon PNP Power Transistors

2SB1508

DESCRIPTION


- With TO-3PML package
- Low collector saturation voltage
- Complement to type 2SD2281
- Wide area of safe operation

APPLICATIONS

- For use in relay drivers ,high-speed Inverters,converters

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

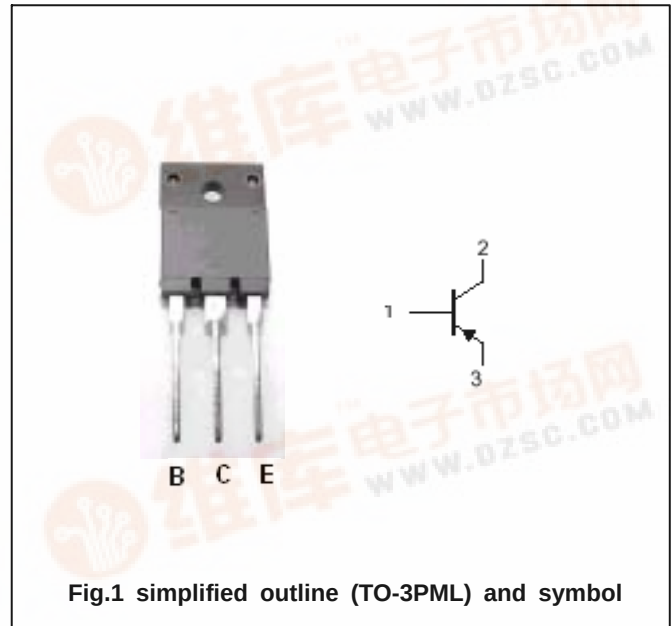

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	MAX	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-60	V
V_{CEO}	Collector-emitter voltage	Open base	-50	V
V_{EBO}	Emitter-base voltage	Open collector	-6	V
I_C	Collector current		-12	A
I_{CM}	Collector current-peak		-25	A
P_C	Collector power dissipation	$T_a=25^\circ\text{C}$	3.0	W
		$T_C=25^\circ\text{C}$	45	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon PNP Power Transistors

2SB1508

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = -1mA ; R_{BE} = \infty$	-50			V
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C = -1mA ; I_E = 0$	-60			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E = -1mA ; I_C = 0$	-6			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C = -6A ; I_B = -0.3A$			-0.5	V
I_{CBO}	Collector cut-off current	$V_{CB} = -40V ; I_E = 0$			-100	μA
I_{EBO}	Emitter cut-off current	$V_{EB} = -4V ; I_C = 0$			-100	μA
h_{FE-1}	DC current gain	$I_C = -1A ; V_{CE} = -2V$	70		280	
h_{FE-2}	DC current gain	$I_C = -5A ; V_{CE} = -2V$	30			
f_T	Transition frequency	$I_C = -1A ; V_{CE} = -5V$		10		MHz

Switching times

t_{on}	Turn-on time	$I_C = -5A ; I_{B1} = -I_{B2} = -0.5A$ $R_L = 4\Omega ; V_{CC} \approx 20V$		0.2		μs
t_{stg}	Storage time			0.4		μs
t_f	Fall time			0.1		μs

◆ h_{FE-1} Classifications

Q	R	S
70-140	100-200	140-280

Silicon PNP Power Transistors

2SB1508

PACKAGE OUTLINE

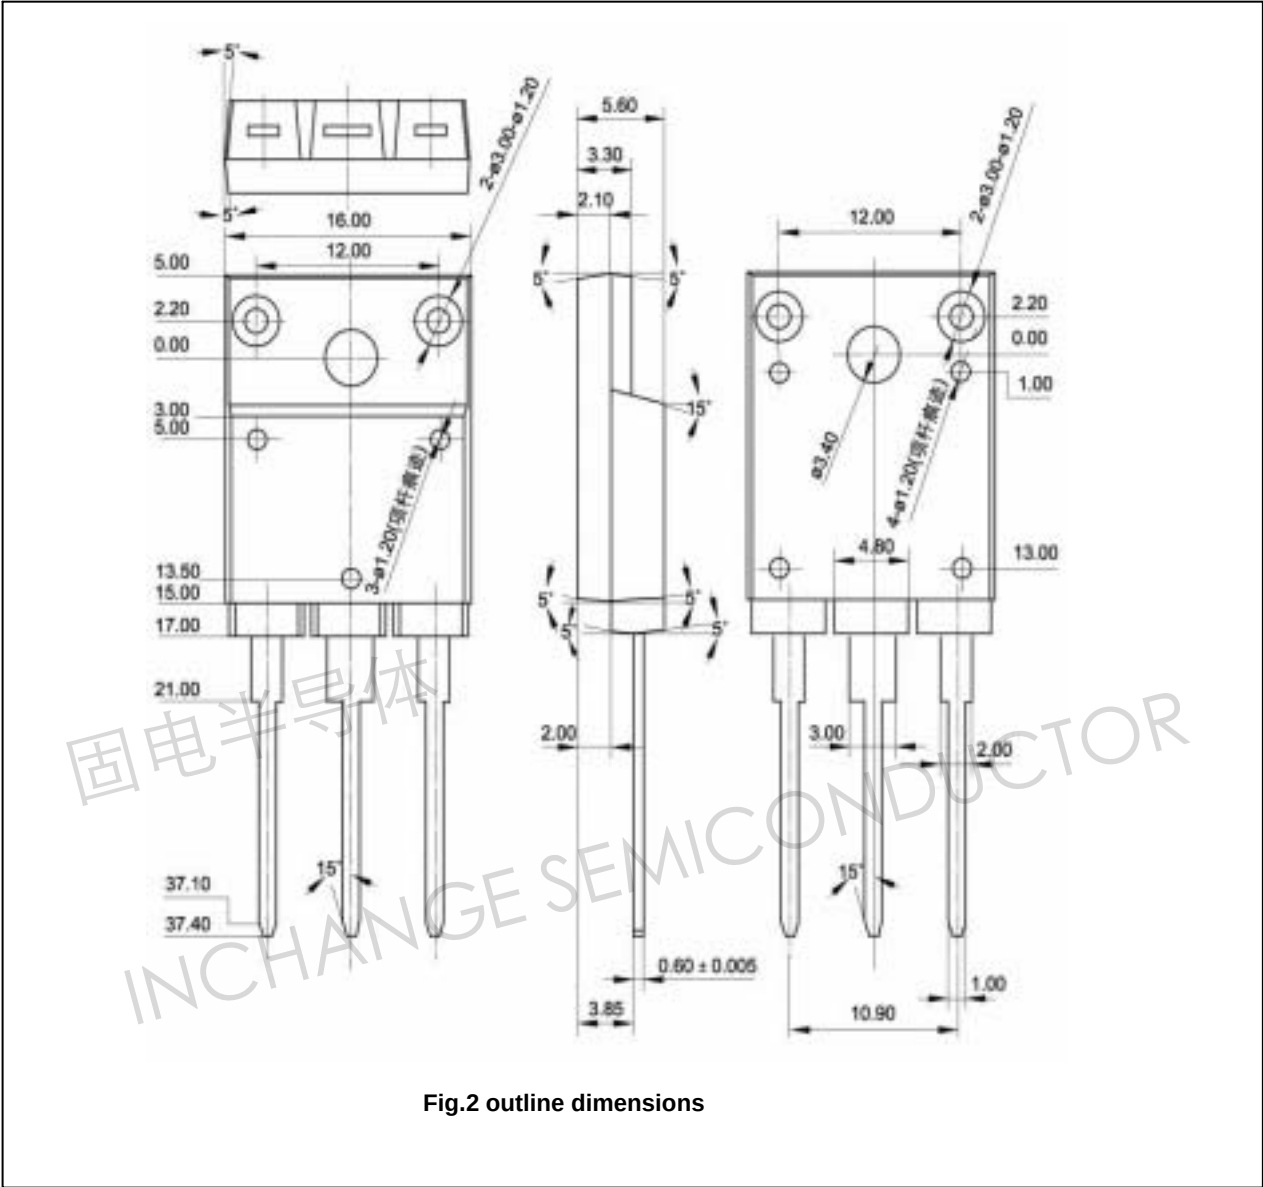


Fig.2 outline dimensions

Silicon PNP Power Transistors

2SB1508

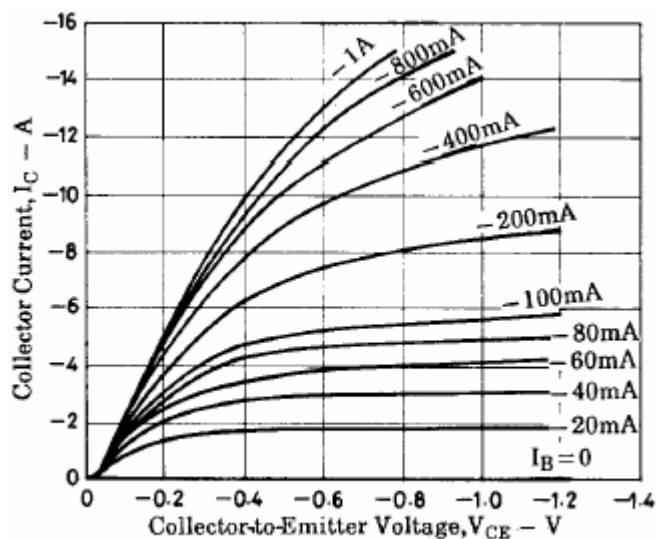


Fig.3 Static Characteristic

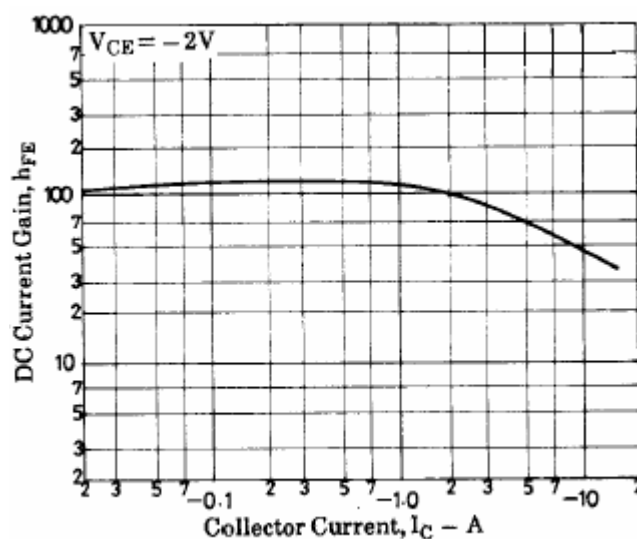


Fig.4 DC current Gain

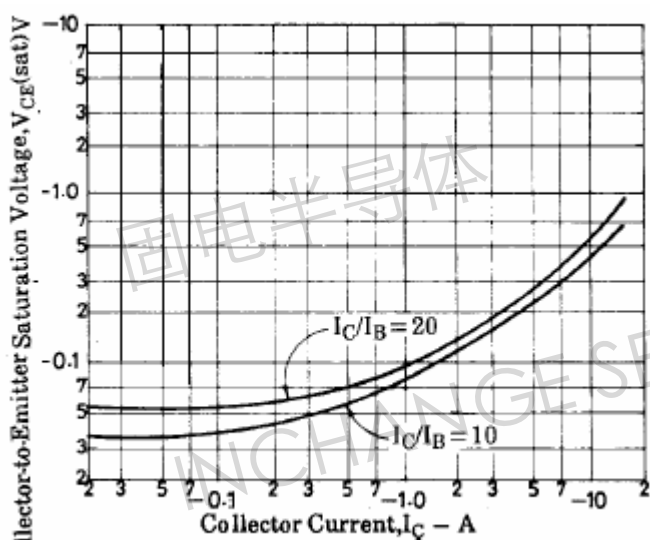


Fig.5 Collector-Emitter Saturation Voltage

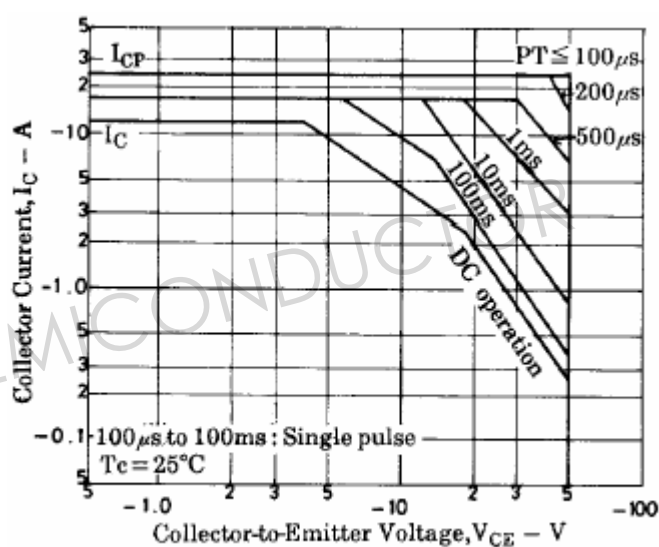


Fig.6 Safe Operating Area