

# HF32FA(JZC-32FA) SUBMINIATURE INTERMEDIATE POWER RELAY



File No.:E134517



File No.:40006182



File No.:CQC05001012774



## Features

- 5A switching capability
- Creepage/clearance distance>8mm
- 5kV dielectric strength (between coil and contacts)
- 1 Form A meets VDE 0700, 0631 reinforce insulation
- 1 Form C meets VDE 0631 reinforce insulation
- Environmental friendly product (RoHS compliant)
- Outline Dimensions: (17.6 x 10.1 x 12.3) mm

## CONTACT DATA

Contact arrangement	1A, 1C	
Contact resistance	70mΩ (at 1A 24VDC)	
Contact material	AgNi	
Contact rating (Res. Load)	1A	1C
	Standard/Sensitive	Standard
	5A 250VAC	3A 250VAC
	5A 30VDC	3A 30VDC
Max. switching voltage	250VAC / 30VDC	
Max. switching current	5A	
Max. switching power	1250VA / 150W	
Mechanical endurance	1 x 10 <sup>6</sup> OPS	
Electrical endurance	1 x 10 <sup>5</sup> OPS	

## COIL DATA

at 23°C

Standard Type (450mW)				
Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.15	3.9	20 x (1±10%)
5	3.75	0.25	6.5	55 x (1±10%)
6	4.50	0.30	7.8	80 x (1±10%)
9	6.75	0.45	11.7	180 x (1±10%)
12	9.00	0.60	15.6	320 x (1±10%)
18	13.5	0.90	23.4	720 x (1±10%)
24	18.0	1.20	31.2	1280 x (1±10%)
48	36.0	2.40	62.4	5120 x (1±10%)

## Sensitive Type (200mW Only for 1 Form A)

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. Allowable Voltage VDC	Coil Resistance Ω
3	2.25	0.15	5.1	45 x (1±10%)
5	3.75	0.25	8.5	125 x (1±10%)
6	4.50	0.30	10.2	180 x (1±10%)
9	6.75	0.45	15.3	400 x (1±10%)
12	9.00	0.60	20.4	720 x (1±10%)
18	13.5	0.90	30.6	1600 x (1±10%)
24	18.0	1.20	40.8	2800 x (1±10%)

## SAFETY APPROVAL RATINGS

UL&CUR	1 Form A	5A 250VAC at 85°C
		1/8HP 125VAC/250VAC
VDE	1 Form C	3A 250VAC
		3A 30VDC
VDE	1 Form A, Sensitive: 3A 400VAC at 85°C	5A 250VAC at 85°C
		5A 30VDC at 85°C

Notes: Only some typical ratings are listed above. If more details are required, please contact us.

## COIL

Coil power Sensitive: 200mW; Standard: 450mW

## ORDERING INFORMATION

	HF32FA	/	012	-H	S	L	1	G	(XXX)
<b>Type</b> <sup>1)</sup>	HF32FA JZC-32FA (Old type)								
<b>Coil voltage</b>	3,5, 6, 9, 12, 18, 24, 48VDC								
<b>Contact arrangement</b>	H: 1 Form A    Z: 1 Form C								
<b>Construction</b> <sup>2)</sup>	S: Wash tight    Nil: Flux proof								
<b>Coil power</b>	L: Sensitive (only for 1 Form A)    Nil: Standard								
<b>Termination</b>	1: Type 1    2: Type 2								
<b>Contact plating</b> <sup>3)</sup>	G: Gold plated    Nil: No gold plated								
<b>Customer special code</b> <sup>4)</sup>	Only for special requirements, e.g. (555) stands for RoHS compliant								

**Notes:** 1) We have now gradually updated our ordering information. We suggest new type should be selected. If necessary, old type can be kept for some period for the old customers.

2) Under the ambience with dangerous gas like H<sub>2</sub>S, SO<sub>2</sub> or NO<sub>2</sub>, wash tight type is recommended; please test the relay in real applications. If the ambience allows, flux proofed is preferentially recommended.



3) For gold plated type, the min. switching current and min. switching voltage is 10mA 5VDC.

4) HF32FA is an environmental friendly product. Please mark a special code (555) when ordering.

## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm






Outline Dimensions



Wiring Diagram  
(Bottom view)




PCB Layout  
(Bottom view)




## OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Unit: mm

H□□2

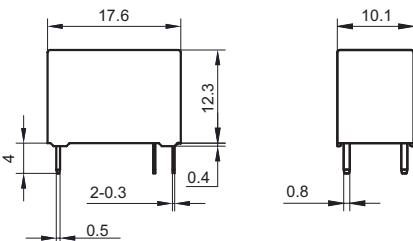


Z□□2

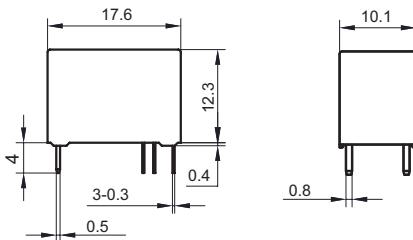

Wiring Diagram  
(Bottom view)




PCB Layout  
(Bottom view)

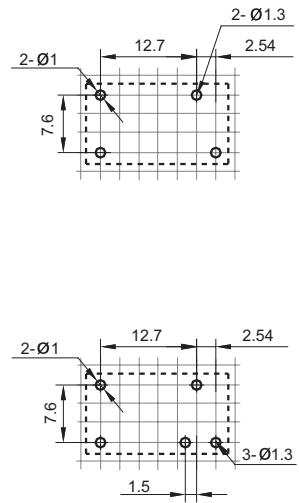


Remark: 1) In case of no tolerance shown in outline dimension: outline dimension  $\leq 1$ mm, tolerance should be  $\pm 0.2$ mm; outline dimension  $> 1$ mm and  $\leq 5$ mm, tolerance should be  $\pm 0.3$ mm; outline dimension  $> 5$ mm, tolerance should be  $\pm 0.4$ mm.  
 2) The tolerance without indicating for PCB layout is always  $\pm 0.1$ mm.  
 3) The width of the gridding is 2.54mm.

## CHARACTERISTIC CURVES


MAXIMUM SWITCHING POWER

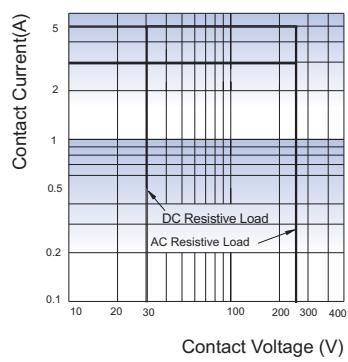

ENDURANCE CURVE

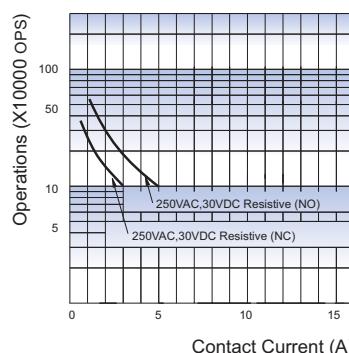

TEMPERATURE RISE

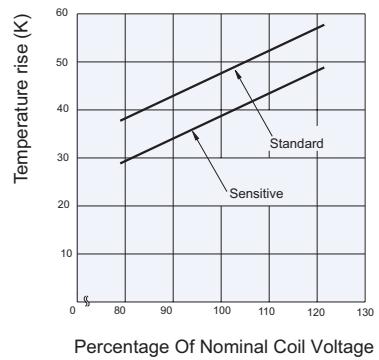

### Disclaimer

This datasheet is for the customers' reference. All the specifications are subject to change without notice. We could not evaluate all the performance and all the parameters for every possible application. Thus the user should be in a right position to choose the suitable product for their own application. If there is any query, please contact Hongfa for the technical service. However, it is the user's responsibility to determine which product should be used only.