

Silicon NPN Power Transistors

2SC4883 2SC4883A

DESCRIPTION


- With TO-220F package
- Complement to type 2SA1859/1859A

APPLICATIONS

- For audio output driver and TV velocity-modulation applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

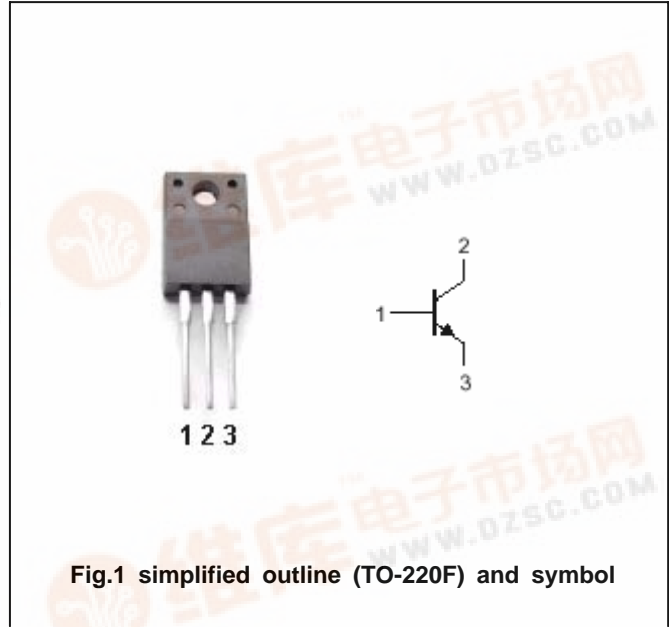

Absolute maximum ratings (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	2SC4883	150	V
		2SC4883A	180	
V <sub>CEO</sub>	Collector-emitter voltage	2SC4883	150	V
		2SC4883A	180	
V <sub>EBO</sub>	Emitter-base voltage	Open collector	6	V
I <sub>C</sub>	Collector current		2	A
I <sub>B</sub>	Base current		1	A
P <sub>C</sub>	Collector dissipation	T <sub>C</sub> =25°C	20	W
T <sub>j</sub>	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature		-55~150	°C

## Silicon NPN Power Transistors

## 2SC4883 2SC4883A

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	2SC4883	I <sub>C</sub> =10mA ; I <sub>B</sub> =0			V
		2SC4883A				
V <sub>CEsat</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =0.7A; I <sub>B</sub> =70mA			1.0	V
I <sub>CBO</sub>	Collector cut-off current	2SC4883				μ A
		2SC4883A				
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =6V; I <sub>C</sub> =0			10	μ A
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =0.7A ; V <sub>CE</sub> =10V	60		240	
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =0.7A ; V <sub>CE</sub> =12V		120		MHz
C <sub>OB</sub>	Output capacitance	I <sub>E</sub> =0 ; V <sub>CB</sub> =10V; f=1MHz		30		pF

## Switching time

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =1A ; I <sub>B1</sub> =-I <sub>B2</sub> =0.1A V <sub>CC</sub> =20V , R <sub>L</sub> =20 Ω		0.50		μ s
t <sub>s</sub>	Storage time			1.50		μ s
t <sub>f</sub>	Fall time			0.50		μ s

Silicon NPN Power Transistors

2SC4883 2SC4883A

PACKAGE OUTLINE

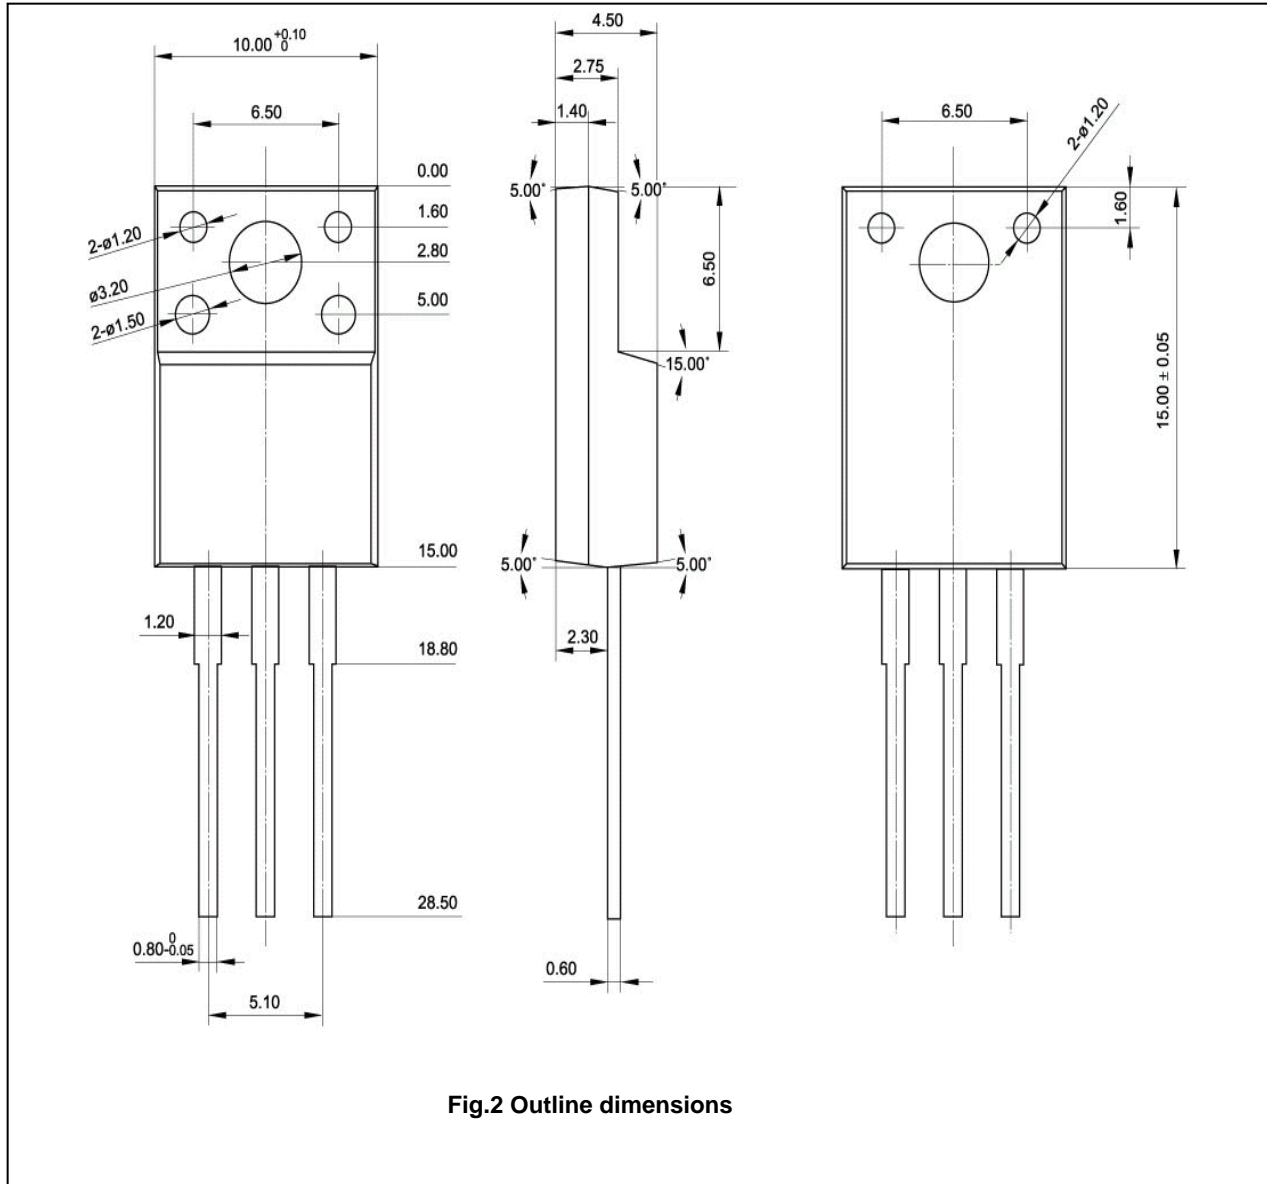


Fig.2 Outline dimensions

Silicon NPN Power Transistors

2SC4883 2SC4883A

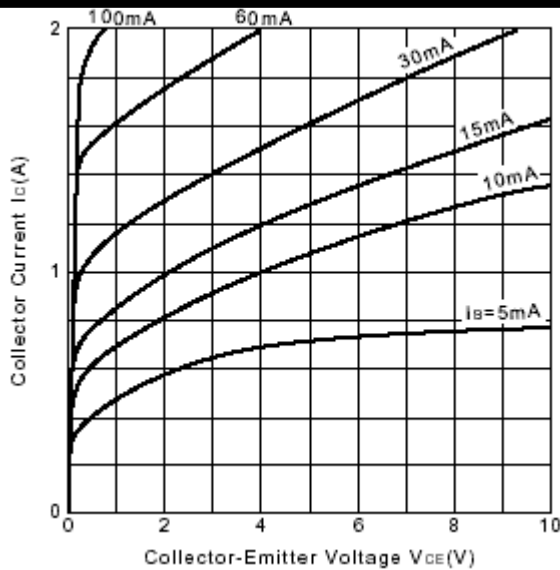


Fig.3 Static Characteristic

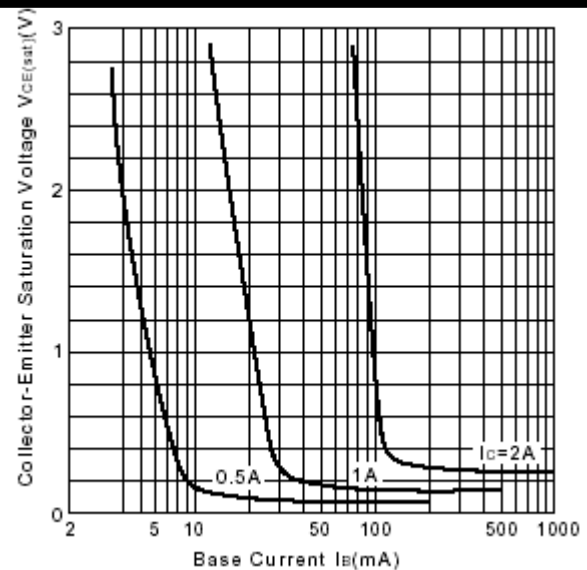


Fig.4  $V_{CE(sat)}$ - $I_B$  Characteristics

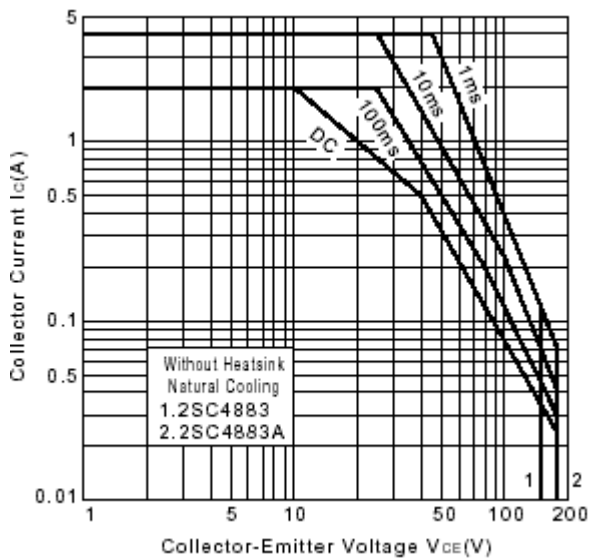


Fig.5 Safe Operating Area

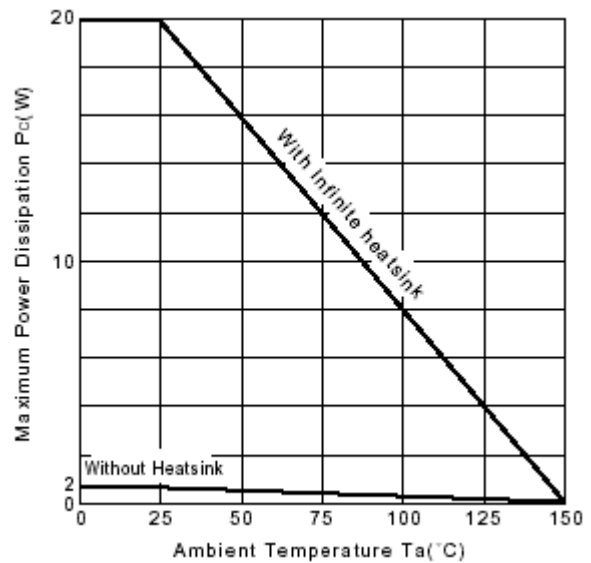


Fig.6  $P_c$ - $T_a$  Derating

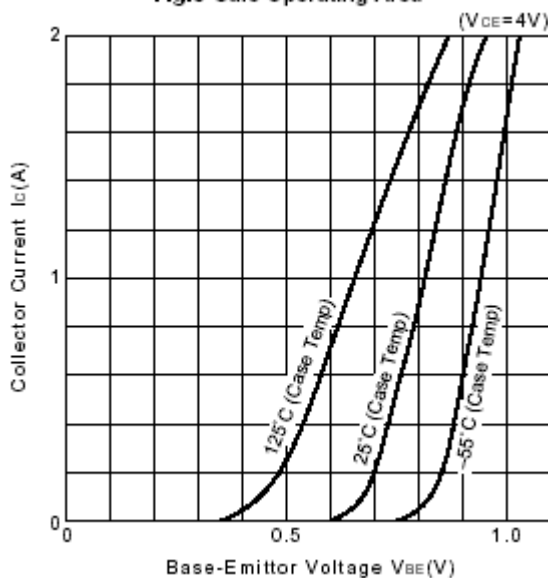


Fig.7  $I_C$ - $V_{BE}$

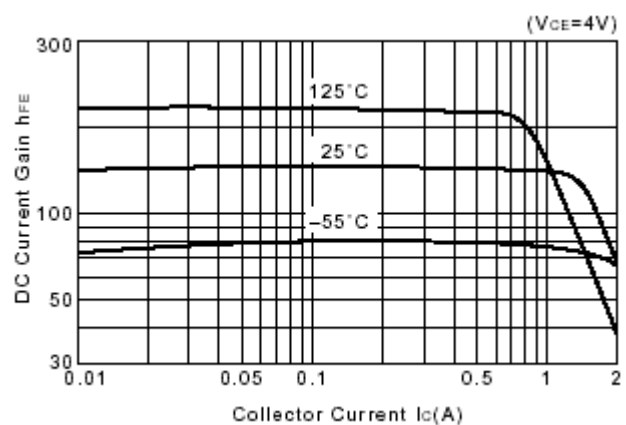


Fig.8 DC current Gain