




SAW Components

Data sheet B4150



Ceramic package **DCC6C**
Features

- Low-loss RF filter for mobile telephone PCS systems, receive path
- Usable passband of 60 MHz
- No matching network required for operation at 50 Ω
- Package for **Surface Mounted Technology (SMT)**

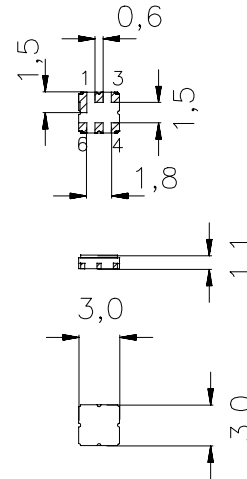

Terminals

- Ni, gold-plated

Dimensions in mm, approx. weight 0,037 g

Pin configuration

2	Input
1, 3	To Be ground
5	Output
4, 6	To Be ground



Type	Ordering code	Marking and Package according to	Packing according to
B4150	B39202-B4150-U410	C61157-A7-A67	F61074-V8088-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 30 /+ 80	$^{\circ}\text{C}$	source and load impedance 50 Ω peak power of TDMA signal, duty cycle 1 : 3 continuous wave
Storage temperature range	T_{stg}	- 40 /+ 85	$^{\circ}\text{C}$	
DC voltage	V_{DC}	0	V	
Input power max. 1930...1990 MHz	P_{IN}	13	dBm	
		10	dBm	



Characteristics

Operating temperature range: $T = 25 \pm 2 \text{ }^\circ\text{C}$
 Terminating source impedance: $Z_S = 50 \text{ } \Omega$
 Terminating load impedance: $Z_L = 50 \text{ } \Omega$

				min.	typ.	max.	
Center frequency		f_c		—	1960,0	—	MHz
Maximum insertion attenuation	1930,0 ... 1990,0	α_{\max}	MHz	—	2,8	3,5	dB
Amplitude ripple (p-p)	1930,0 ... 1990,0	$\Delta\alpha$	MHz	—	0,9	1,6	dB
Input return loss	1930,0 ... 1990,0		MHz	9,5	10,5		dB
Output return loss	1930,0 ... 1990,0		MHz	9,5	10,5		dB
Attenuation		α					
	10,0 ... 1850,0		MHz	20,0	21,0	—	dB
	1850,0 ... 1910,0		MHz	21,0	30,0	—	dB
	2040,0 ... 2100,0		MHz	25,0	27,0	—	dB
	2100,0 ... 5000,0		MHz	20,0	25,0	—	dB
	5000,0 ... 6000,0		MHz	8,0	18,0	—	dB



SAW Components

B4150

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data sheet B4150



Characteristics

Operating temperature range: $T = -30$ to $+80$ °C
 Terminating source impedance: $Z_S = 50 \Omega$
 Terminating load impedance: $Z_L = 50 \Omega$

			min.	typ.	max.	
Center frequency	f_c		—	1960,0	—	MHz
Maximum insertion attenuation	α_{max}					
		1930,0 ... 1990,0 MHz	—	3,2	5,3	dB
Amplitude ripple (p-p)	$\Delta\alpha$					
		1930,0 ... 1990,0 MHz	—	1,2	3,2	dB
Input return loss						
		1930,0 ... 1990,0 MHz	9,5	10,5		dB
Output return loss						
		1930,0 ... 1990,0 MHz	9,5	10,5		dB
Attenuation	α					
		10,0 ... 1850,0 MHz	20,0	21,0	—	dB
		1850,0 ... 1910,0 MHz	15,0	20,0	—	dB
		2040,0 ... 2100,0 MHz	25,0	27,0	—	dB
		2100,0 ... 5000,0 MHz	20,0	25,0	—	dB
		5000,0 ... 6000,0 MHz	8,0	18,0	—	dB



SAW Components

B4150


Low-Loss Filter for Mobile Communication

1960,0 MHz


Data sheet B4150



Transfer function (25 °C spec)


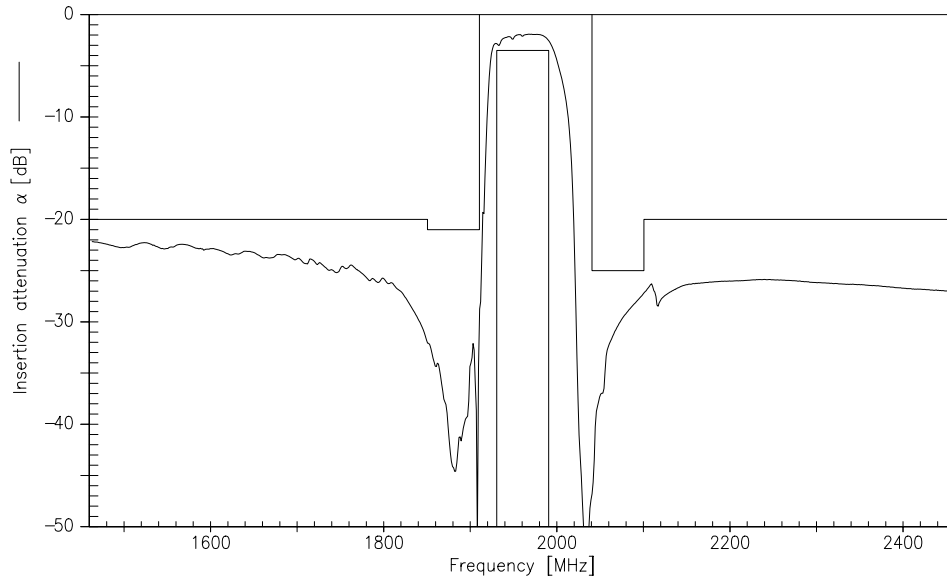


Transfer function (wideband)

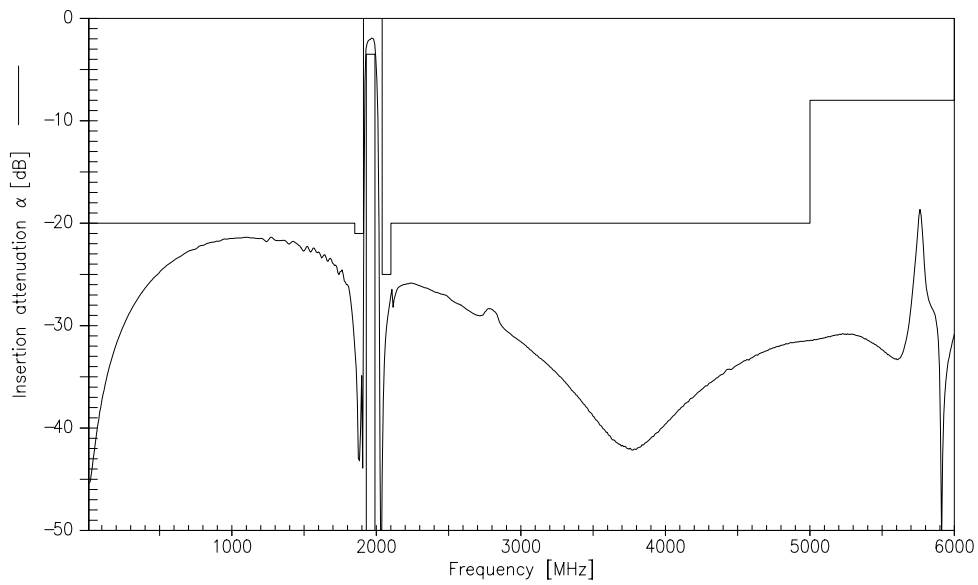



Reflection functions

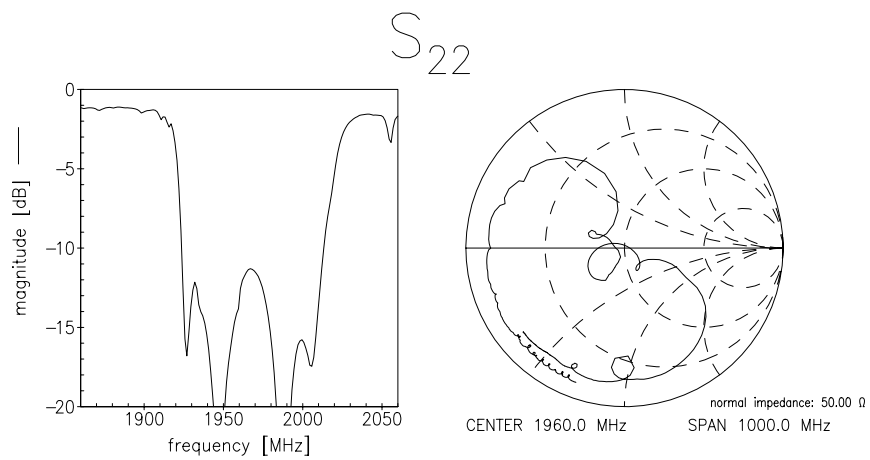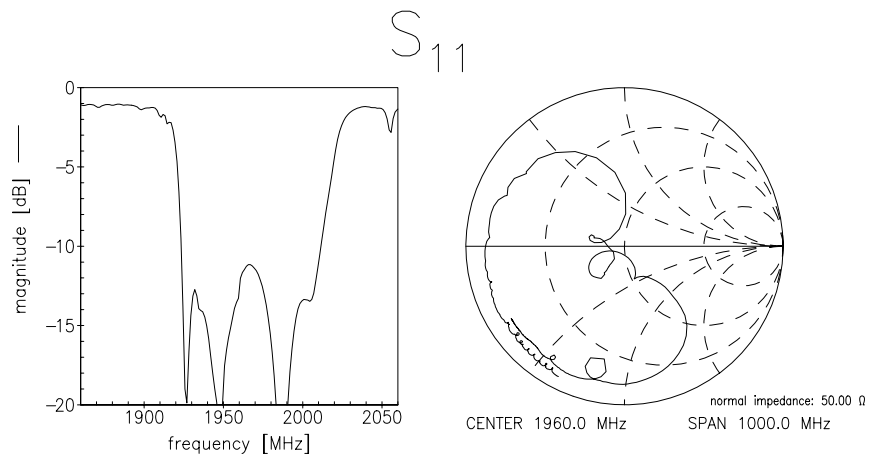



SAW Components

B4150

Low-Loss Filter for Mobile Communication

1960,0 MHz

Data sheet B4150



Published by EPCOS AG

Surface Acoustic Wave Components Division, OFW E MF

P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.