

Surface Mount Directional Coupler

50Ω 50 to 750 MHz

JDC-20-1W+
JDC-20-1W




Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Pin Connections

INPUT	1
OUTPUT	6
COUPLED	3
GROUND	2,5
ISOLATE (DO NOT USE)	4

Outline Drawing

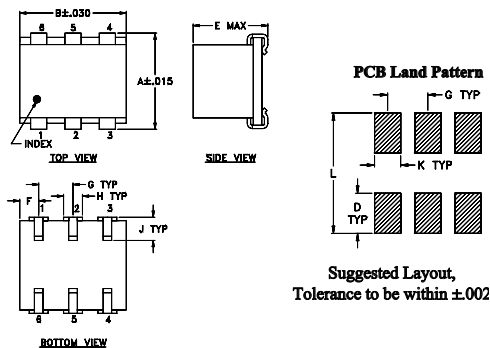


Outline Dimensions (inch mm)

A	B	C	D	E	F	G
.280	.310	--	.100	.225	.055	.100
7.11	7.87	--	2.54	5.72	1.40	2.54

H	J	K	L	wt
.047	.065	.065	.300	grams
1.19	1.65	1.65	7.62	0.45

Demo Board MCL P/N: TB-185 Suggested PCB Layout (PL-046)

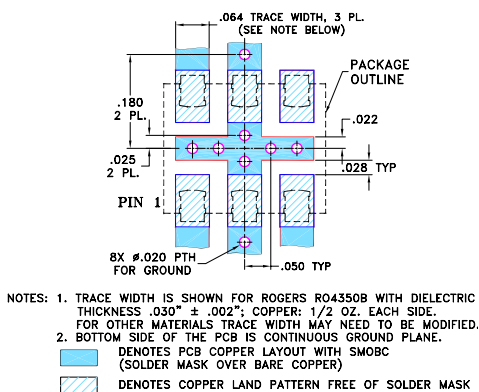

Features

- wideband, 50 to 750 MHz
- low mainline loss, 0.5 dB typ.
- excellent solderability

Applications

- communications
- level detecting
- signal sampling
- reflective power measurements

CASE STYLE: BH292

PRICE: \$ 13.60 ea. QTY (25-49)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.




Directional Coupler Electrical Specifications

FREQ. (MHz)	COUPLING (dB)		MAINLINE LOSS ¹ (dB)		DIRECTIVITY (dB)		VSWR (:1)	POWER INPUT, W
	Nom.	Flatness	Typ.	Max.	Typ.	Min.		
f _L -f _U							Typ.	Max.
50-750	19.5±0.5	±0.5	0.5	0.9	22	15	1.2	0.5


1. Mainline loss includes theoretical power loss at coupled port.

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB) In-Out	Coupling (dB) In-Cpl	Directivity (dB)	Return Loss (dB)		
				In	Out	Cpl
50.00	0.33	19.77	21.32	30.32	32.06	25.34
150.00	0.33	19.87	21.83	34.90	38.90	29.25
250.00	0.35	19.87	22.89	36.40	41.45	30.37
330.00	0.35	19.87	24.06	36.11	40.25	30.40
385.00	0.40	19.87	25.12	35.07	38.62	29.96
435.00	0.42	19.82	26.45	33.87	37.00	29.35
480.00	0.46	19.83	27.52	32.62	35.61	28.65
525.00	0.44	19.76	28.59	31.36	34.22	27.88
650.00	0.50	19.68	28.53	27.83	30.53	25.66
750.00	0.55	19.59	25.15	25.26	27.85	24.06

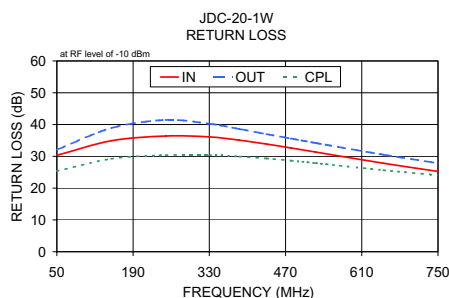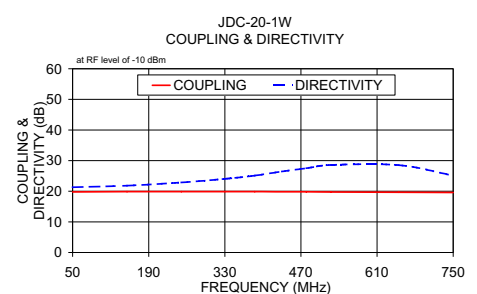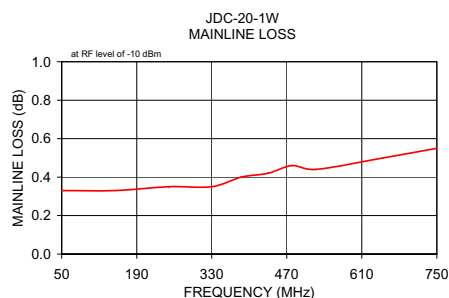

Electrical Schematic

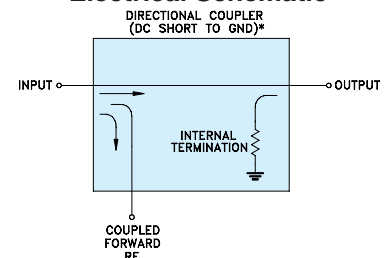

* ELECTRICAL SCHEMATIC IS FOR DIRECTIONAL COUPLER WITH INTERNAL TRANSFORMER(S) THAT ROUTES DC FROM RF PORTS TO GROUND.

For detailed performance specs & shopping online see web site

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED
P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com
I/F/R/F MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

REV. D
M119986
ED-4386/3
JDC-20-1W
WZ/TD/CP/AM
090903