


defining a degree of excellence



1 TAP LEADING EDGE CONTROL LOW VOLTAGE DELAY MODULES

Cat 35-R0

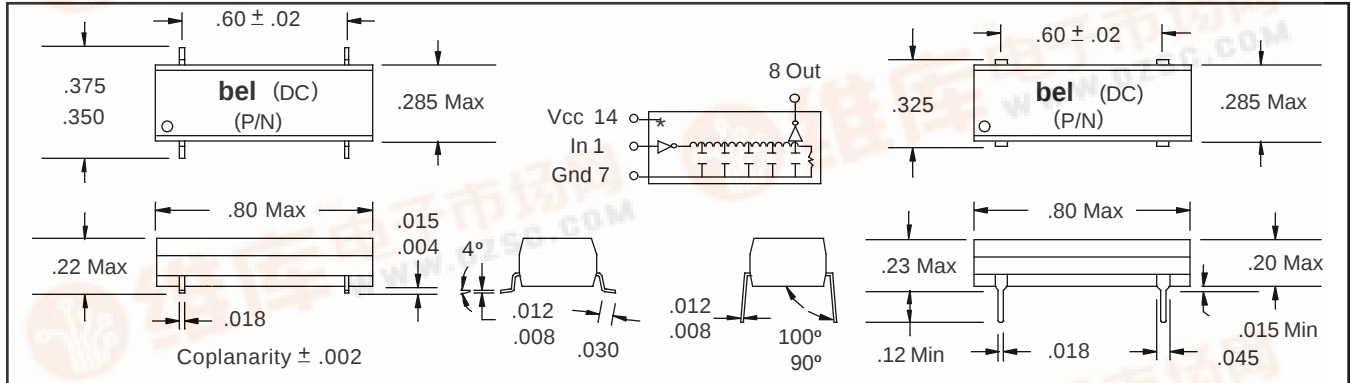

Part Numbers

SMD	Thru-Hole	Time Delay	Tolerance	Rise Time
S477-0010-06	A477-0010-06	10 ns	± 2.0 ns	3 ns
S477-0020-06	A477-0020-06	20 ns	± 2.0 ns	3 ns
S477-0030-06	A477-0030-06	30 ns	± 2.0 ns	3 ns
S477-0040-06	A477-0040-06	40 ns	± 2.0 ns	3 ns
S477-0050-06	A477-0050-06	50 ns	± 2.5 ns	3 ns
S477-0060-06	A477-0060-06	60 ns	± 3.0 ns	3 ns
S477-0070-06	A477-0070-06	70 ns	± 3.5 ns	3 ns
S477-0080-06	A477-0080-06	80 ns	± 4.0 ns	3 ns
S477-0090-06	A477-0090-06	90 ns	± 4.5 ns	3 ns
S477-0100-06	A477-0100-06	100 ns	± 5.0 ns	3 ns
S477-0125-06	A477-0125-06	125 ns	± 6.3 ns	3 ns
S477-0150-06	A477-0150-06	150 ns	± 7.5 ns	3 ns
S477-0200-06	A477-0200-06	200 ns	± 10.0 ns	3 ns


Tolerances

Input to Output ± 2 ns or 5% , Whichever is Greater
Delays measured @ 50% levels on Leading Edge only
with no loads on Output
Rise and Fall Times measured from 10% to 90% levels

Drive Capabilities

Nh	Logic 1 Fanout	-	10 LSTTL Loads Max.
Nl	Logic 0 Fanout	-	10 LSTTL Loads Max.

Recommended Temperature Profile

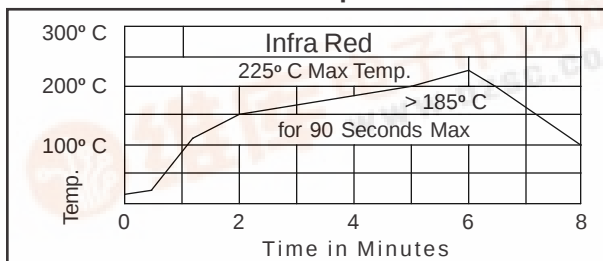

Test Conditions @ 25°C

Ein	Pulse Voltage	3.0 Volts
Trin	Rise Time	3.0 ns (10%-90%)
PW	Pulse Width	1.2 x Total Delay
PP	Pulse Period	4 x Pulse Width
Iccl	Supply Current	25 ma Typical
Vcc	Supply Voltage	5.0 Volts

Electrical Characteristics

	Min.	Max.	Units
Vcc	3.0	3.6	V
Vih	2.4		V
Vil		0.8	V
Iik		-20	ma
Ioh		20	ma
Iol		-20	ma
Voh	2.9		V
Vol		0.1	V
Vik		-0.5	V
Iih		1	ua
Iil		-1	ua
Icch		10	ma
Iccl		30	ma
Ta	0°	70°	C
PW	40		%
d		50	%
Tc	Temp. Coeff. of Total Delay (TD) 100 + (25000/TD) PPM/°C		

Notes

Transfer molded for better reliability
Compatible with TTL & DTL circuits
Terminals: Electro-Tin plate phosphor bronze
Performance warranty is limited to specified parameters listed
SMD - Tape & Reel available:
32mm Wide x 16mm Pitch, 500 pieces per 13" reel

Other Delays and Tolerances Available Consult Sales

Specifications subject to change without notice.

Corporate Office

Bel Fuse Inc.
198 Van Vorst Street, Jersey City, NJ 07302-4496

Tel: 201-432-0463

Fax: 201-432-9542

E-Mail: Bel Fuse@compuserve.com

Internet: <http://www.belfuse.com>

Far East Office

Bel Fuse Ltd.

8F/8 Luk Hop Street

San Po Kong

Kowloon, Hong Kong

Tel: 852-2328-5515

Fax: 852-2352-3706

European Office

Bel Fuse Europe Ltd.

Preston Technology Management Centre

Marsh Lane, Preston PR1 8UD

Lancashire, U.K.

Tel: 44-1772-556601

Fax: 44-1772-888366