

# FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

- High Slew Rate . . . 10.5 V/ $\mu$ s Typ
- High-Gain Bandwidth . . . 5.1 MHz Typ
- Supply Voltage Range 2.5 V to 5.5 V
- Rail-to-Rail Output
- 360  $\mu$ V Input Offset Voltage
- Low Distortion Driving 600- $\Omega$  0.005% THD+N
- 1 mA Supply Current (Per Channel)
- 17 nV/ $\sqrt{\text{Hz}}$  Input Noise Voltage
- 2 pA Input Bias Current
- Characterized From  $T_A = -55^\circ\text{C}$  to  $125^\circ\text{C}$
- Available in MSOP and SOT-23 Packages
- Micropower Shutdown Mode . . .  $I_{DD} < 1 \mu\text{A}$
- Available in Q-Temp Automotive High Reliability Automotive Applications Configuration Control / Print Support Qualification to Automotive Standards

## description

The TLV277x CMOS operational amplifier family combines high slew rate and bandwidth, rail-to-rail output swing, high output drive, and excellent dc precision. The device provides 10.5 V/ $\mu$ s of slew rate and 5.1 MHz of bandwidth while only consuming 1 mA of supply current per channel. This ac performance is much higher than current competitive CMOS amplifiers. The rail-to-rail output swing and high output drive make these devices a good choice for driving the analog input or reference of analog-to-digital converters. These devices also have low distortion while driving a 600- $\Omega$  load for use in telecom systems.

These amplifiers have a 360- $\mu$ V input offset voltage, a 17 nV/ $\sqrt{\text{Hz}}$  input noise voltage, and a 2-pA input bias current for measurement, medical, and industrial applications. The TLV277x family is also specified across an extended temperature range ( $-40^\circ\text{C}$  to  $125^\circ\text{C}$ ), making it useful for automotive systems, and the military temperature range ( $-55^\circ\text{C}$  to  $125^\circ\text{C}$ ), for military systems.

These devices operate from a 2.5-V to 5.5-V single supply voltage and are characterized at 2.7 V and 5 V. The single-supply operation and low power consumption make these devices a good solution for portable applications. The following table lists the packages available.

FAMILY PACKAGE TABLE


| DEVICE  | NUMBER OF CHANNELS | PACKAGE TYPES |      |      |        |       |      |      |      | SHUTDOWN | UNIVERSAL EVM BOARD                             |
|---------|--------------------|---------------|------|------|--------|-------|------|------|------|----------|-------------------------------------------------|
|         |                    | PDIP          | CDIP | SOIC | SOT-23 | TSSOP | MSOP | LCCC | CPAK |          |                                                 |
| TLV2770 | 1                  | 8             | —    | 8    | —      | —     | 8    | —    | —    | Yes      | Refer to the EVM Selection Guide (Lit# SLOU060) |
| TLV2771 | 1                  | —             | —    | 8    | 5      | —     | —    | —    | —    | —        |                                                 |
| TLV2772 | 2                  | 8             | 8    | 8    | —      | 8     | 8    | 20   | 10   | —        |                                                 |
| TLV2773 | 2                  | 14            | —    | 14   | —      | —     | 10   | —    | —    | Yes      |                                                 |
| TLV2774 | 4                  | 14            | —    | 14   | —      | 14    | —    | —    | —    | —        |                                                 |
| TLV2775 | 4                  | 16            | —    | 16   | —      | 16    | —    | —    | —    | Yes      |                                                 |

A SELECTION OF SINGLE-SUPPLY OPERATIONAL AMPLIFIER PRODUCTS<sup>†</sup>

| DEVICE  | $V_{DD}$ (V) | BW (MHz) | SLEW RATE (V/ $\mu$ s) | $I_{DD}$ (per channel) ( $\mu$ A) | RAIL-TO-RAIL |
|---------|--------------|----------|------------------------|-----------------------------------|--------------|
| TLV277X | 2.5 – 6.0    | 5.1      | 10.5                   | 1000                              | O            |
| TLV247X | 2.7 – 6.0    | 2.8      | 1.5                    | 600                               | I/O          |
| TLV245X | 2.7 – 6.0    | 0.22     | 0.11                   | 23                                | I/O          |
| TLV246X | 2.7 – 6.0    | 6.4      | 1.6                    | 550                               | I/O          |

<sup>†</sup> All specifications measured at 5 V.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



This document contains information on products in more than one phase of development. The status of each device is indicated on the page(s) specifying its electrical characteristics.



Copyright © 1998–2004, Texas Instruments Incorporated  
On products compliant to MIL-PRF-38535, all parameters are tested unless otherwise noted. On all other products, production processing does not necessarily include testing of all parameters.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT

### OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

TLV2770 and TLV2771 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max AT 25°C (mV) | PACKAGED DEVICES         |                  |                   |                 |
|----------------|----------------------------------|--------------------------|------------------|-------------------|-----------------|
|                |                                  | SMALL OUTLINE (D)        | SOT-23 (DBV)     | MSOP (DGK)        | PLASTIC DIP (P) |
| 0°C to 70°C    | 2.5                              | TLV2770CD<br>TLV2771CD   | —<br>TLV2771CDBV | TLV2770CDGK†<br>— | TLV2770CP<br>—  |
| –40°C to 125°C | 2.5                              | TLV2770ID<br>TLV2771ID   | —<br>TLV2771IDBV | TLV2770IDGK†<br>— | TLV2770IP<br>—  |
|                | 1.6                              | TLV2770AID<br>TLV2771AID | —<br>—           | —<br>—            | TLV2770AIP<br>— |

† This device is in the Product Preview stage of development. Please contact your local TI sales office for availability.

TLV2772 and TLV2773 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max AT 25°C (mV) | PACKAGED DEVICES         |                  |                  |                 |                 |
|----------------|----------------------------------|--------------------------|------------------|------------------|-----------------|-----------------|
|                |                                  | SMALL OUTLINE (D)        | MSOP (DGK)       | MSOP (DGS)       | PLASTIC DIP (N) | PLASTIC DIP (P) |
| 0°C to 70°C    | 2.5                              | TLV2772CD<br>TLV2773CD   | TLV2772CDGK<br>— | —<br>TLV2773CDGS | —<br>TLV2773CN  | TLV2772CP<br>—  |
| –40°C to 125°C | 2.5                              | TLV2772ID<br>TLV2773ID   | TLV2772IDGK<br>— | —<br>TLV2773IDGS | —<br>TLV2773IN  | TLV2772IP<br>—  |
|                | 1.6                              | TLV2772AID<br>TLV2773AID | —<br>—           | —<br>—           | —<br>TLV2773AIN | TLV2772AIP<br>— |

TLV2774 and TLV2775 AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max AT 25°C (mV) | PACKAGED DEVICES         |                 |                 |                            |
|----------------|----------------------------------|--------------------------|-----------------|-----------------|----------------------------|
|                |                                  | SMALL OUTLINE (D)        | PLASTIC DIP (N) | PLASTIC DIP (P) | TSSOP (PW)                 |
| 0°C to 70°C    | 2.7                              | TLV2774CD<br>TLV2775CD   | —<br>TLV2775CN  | TLV2774CP<br>—  | TLV2774CPW<br>TLV2775CPW   |
| –40°C to 125°C | 2.7                              | TLV2774ID<br>TLV2775ID   | —<br>TLV2775IN  | TLV2774IP<br>—  | TLV2774IPW<br>TLV2775IPW   |
|                | 2.1                              | TLV2774AID<br>TLV2775AID | —<br>TLV2775AIN | TLV2774AIP<br>— | TLV2774AIPW<br>TLV2775AIPW |

TLV2772M/Q AND TLV2772AM/Q AVAILABLE OPTIONS

| T <sub>A</sub> | V <sub>IO</sub> max AT 25°C (mV) | PACKAGED DEVICES  |                   |                  |                      |              |
|----------------|----------------------------------|-------------------|-------------------|------------------|----------------------|--------------|
|                |                                  | SMALL OUTLINE (D) | CHIP CARRIER (FK) | CERAMIC DIP (JG) | CERAMIC FLATPACK (U) | TSSOP (PW)   |
| –40°C to 125°C | 2.5                              | TLV2772QD‡        | —                 | —                | —                    | TLV2772QPW‡  |
|                | 1.6                              | TLV2772AQD‡       | —                 | —                | —                    | TLV2772AQPW‡ |
| –55°C to 125°C | 2.5                              | TLV2772MD         | TLV2772MFK        | TLV2772MJG       | TLV2772MU            | —            |
|                | 1.6                              | TLV2772AMD        | TLV2772AMFK       | TLV2772AMJG      | TLV2772AMU           | —            |

‡ Available in tape and reel

# **TLV277x, TLV277xA** **FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004


## **PACKAGE SYMBOLS**

| PACKAGE TYPE | PINS   | PART NUMBER | SYMBOL <sup>†</sup> |
|--------------|--------|-------------|---------------------|
| SOT23        | 5 Pin  | TLV2771CDBV | VAMC                |
|              |        | TLV2771IDBV | VAMI                |
| MSOP         | 8 Pin  | TLV2770CDGK | xxTIABO             |
|              |        | TLV2770IDGK | xxTIABP             |
|              |        | TLV2772CDGK | xxTIAAF             |
|              |        | TLV2772IDGK | xxTIAAG             |
|              | 10 Pin | TLV2773CDGS | xxTIABQ             |
|              |        | TLV2773IDGS | xxTIABR             |

<sup>†</sup> xx represents the device date code.

## **TLV277x PACKAGE PINOUT**

### **TLV2772M AND TLV2772AM FK PACKAGE (TOP VIEW)**

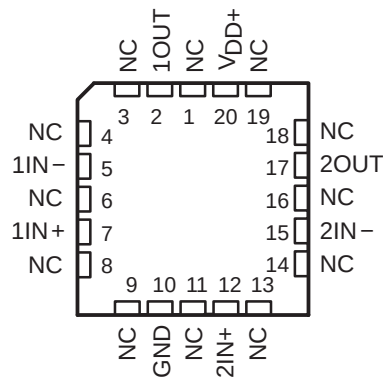


NC – No internal connection

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004


### TLV277x PACKAGE PINOUTS(1)

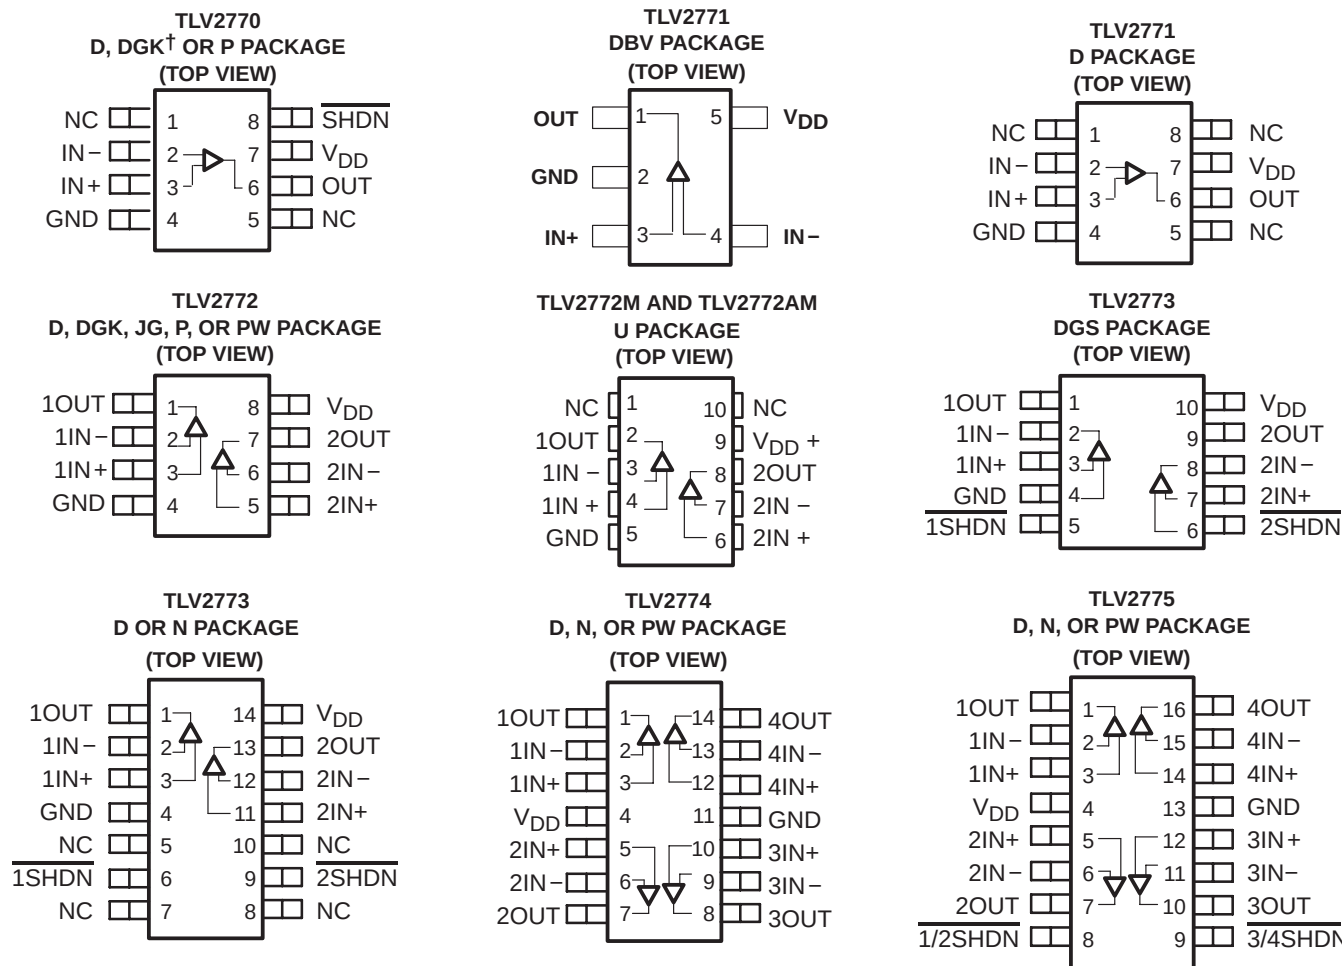

† This device is in the Product Preview stage of development. Please contact your local TI sales office for availability.

(1) SOT-23 may or may not be indicated

### TYPICAL PIN 1 INDICATORS

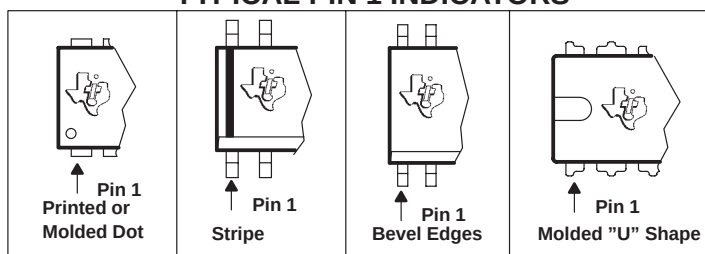

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)<sup>†</sup>

|                                                                   |                              |
|-------------------------------------------------------------------|------------------------------|
| Supply voltage, $V_{DD}$ (see Note 1)                             | 7 V                          |
| Differential input voltage, $V_{ID}$ (see Note 2)                 | $\pm V_{DD}$                 |
| Input voltage range, $V_I$ (any input, see Note 1)                | -0.3 V to $V_{DD}$           |
| Input current, $I_I$ (any input)                                  | $\pm 4$ mA                   |
| Output current, $I_O$                                             | $\pm 50$ mA                  |
| Total current into $V_{DD+}$                                      | $\pm 50$ mA                  |
| Total current out of GND                                          | $\pm 50$ mA                  |
| Duration of short-circuit current (at or below) 25°C (see Note 3) | unlimited                    |
| Continuous total power dissipation                                | See Dissipation Rating Table |
| Operating free-air temperature range, $T_A$ : C suffix            | 0°C to 70°C                  |
| I suffix                                                          | -40°C to 125°C               |
| Q suffix                                                          | -40°C to 125°C               |
| M suffix                                                          | -55°C to 125°C               |
| Storage temperature range, $T_{stg}$                              | -65°C to 150°C               |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds      | 260°C                        |

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

- NOTES: 1. All voltage values, except differential voltages, are with respect to GND.
2. Differential voltages are at the noninverting input with respect to the inverting input. Excessive current flows when input is brought below GND - 0.3 V.
3. The output may be shorted to either supply. Temperature and/or supply voltages must be limited to ensure that the maximum dissipation rating is not exceeded.

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$<br>POWER RATING | DERATING FACTOR<br>ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$<br>POWER RATING | $T_A = 85^\circ\text{C}$<br>POWER RATING | $T_A = 125^\circ\text{C}$<br>POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|------------------------------------------|-------------------------------------------|
| D       | 725 mW                                      | 5.8 mW/°C                                         | 464 mW                                   | 377 mW                                   | 145 mW                                    |
| DBV     | 437 mW                                      | 3.5 mW/°C                                         | 280 mW                                   | 227 mW                                   | 87 mW                                     |
| DGK     | 424 mW                                      | 3.4 mW/°C                                         | 271 mW                                   | 220 mW                                   | 85 mW                                     |
| DGS     | 424 mW                                      | 3.4 mW/°C                                         | 271 mW                                   | 220 mW                                   | 85 mW                                     |
| FK      | 1375 mW                                     | 11.0 mW/°C                                        | 672 mW                                   | 546 mW                                   | 210 mW                                    |
| JG      | 1050 mW                                     | 8.4 mW/°C                                         | 880 mW                                   | 714 mW                                   | 275 mW                                    |
| N       | 1150 mW                                     | 9.2 mW/°C                                         | 736 mW                                   | 598 mW                                   | 230 mW                                    |
| P       | 1000 mW                                     | 8.0 mW/°C                                         | 640 mW                                   | 520 mW                                   | 200 mW                                    |
| PW      | 700 mW                                      | 5.6 mW/°C                                         | 448 mW                                   | 364 mW                                   | 140 mW                                    |
| U       | 675 mW                                      | 5.4 mW/°C                                         | 432 mW                                   | 350 mW                                   | 135 mW                                    |

### recommended operating conditions

|                                       | C SUFFIX |                 | I SUFFIX |                 | Q SUFFIX |                 | M SUFFIX |                 | UNIT |
|---------------------------------------|----------|-----------------|----------|-----------------|----------|-----------------|----------|-----------------|------|
|                                       | MIN      | MAX             | MIN      | MAX             | MIN      | MAX             | MIN      | MAX             |      |
| Supply voltage, $V_{DD}$              | 2.5      | 6               | 2.5      | 6               | 2.5      | 6               | 2.5      | 6               | V    |
| Input voltage range, $V_I$            | GND      | $V_{DD+} - 1.3$ | GND      | $V_{DD+} - 1.3$ | GND      | $V_{DD+} - 1.3$ | GND      | $V_{DD+} - 1.3$ | V    |
| Common-mode input voltage, $V_{IC}$   | GND      | $V_{DD+} - 1.3$ | GND      | $V_{DD+} - 1.3$ | GND      | $V_{DD+} - 1.3$ | GND      | $V_{DD+} - 1.3$ | V    |
| Operating free-air temperature, $T_A$ | 0        | 70              | -40      | 125             | -40      | 125             | -55      | 125             | °C   |

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted)

| PARAMETER              |                                                                      | TEST CONDITIONS                                              | T <sub>A</sub> <sup>†</sup>                       | TLV277xC                    |                  |     | UNIT  |   |
|------------------------|----------------------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------|-----------------------------|------------------|-----|-------|---|
|                        |                                                                      |                                                              |                                                   | MIN                         | TYP              | MAX |       |   |
| V <sub>IO</sub>        | Input offset voltage                                                 | V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω,<br>No load    | V <sub>O</sub> = 0,<br>V <sub>DD</sub> = ±1.35 V, | 25°C                        | 0.48             | 2.5 | mV    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 0.53             | 2.7 |       |   |
|                        |                                                                      |                                                              |                                                   | 25°C                        | 0.8              | 2.7 |       |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 0.86             | 2.9 |       |   |
| αV <sub>IO</sub>       | Temperature coefficient of input offset voltage                      | V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω                | V <sub>O</sub> = 0,<br>V <sub>DD</sub> = ±1.35 V  | 25°C to 125°C               | 2                |     | μV/°C |   |
| I <sub>IO</sub>        | Input offset current                                                 |                                                              |                                                   | 25°C                        | 1                | 60  | pA    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 2                | 100 |       |   |
| I <sub>IB</sub>        | Input bias current                                                   |                                                              |                                                   | 25°C                        | 2                | 60  | pA    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 6                | 100 |       |   |
| V <sub>OH</sub>        | High-level output voltage                                            |                                                              |                                                   | I <sub>OH</sub> = −0.675 mA | 25°C             | 2.6 |       | V |
|                        |                                                                      |                                                              |                                                   |                             | Full range       | 2.5 |       |   |
|                        |                                                                      |                                                              |                                                   | I <sub>OH</sub> = −2.2 mA   | 25°C             | 2.4 |       |   |
|                        |                                                                      | Full range                                                   | 2.1                                               |                             |                  |     |       |   |
| V <sub>OL</sub>        | Low-level output voltage                                             | V <sub>IC</sub> = 1.35 V,<br>I <sub>OL</sub> = 0.675 mA      | 25°C                                              | 0.1                         |                  | V   |       |   |
|                        |                                                                      |                                                              | Full range                                        | 0.2                         |                  |     |       |   |
|                        |                                                                      | V <sub>IC</sub> = 1.35 V,<br>I <sub>OL</sub> = 2.2 mA        | 25°C                                              | 0.21                        |                  |     |       |   |
|                        |                                                                      |                                                              | Full range                                        | 0.6                         |                  |     |       |   |
| A <sub>VD</sub>        | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 1.35 V,<br>V <sub>O</sub> = 0.6 V to 2.1 V | R <sub>L</sub> = 10 kΩ,                           | 25°C                        | 20               | 380 | V/mV  |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 13               |     |       |   |
| r <sub>i(d)</sub>      | Differential input resistance                                        |                                                              |                                                   | 25°C                        | 10 <sup>12</sup> |     | Ω     |   |
| c <sub>i(c)</sub>      | Common-mode input capacitance                                        | f = 10 kHz                                                   |                                                   | 25°C                        | 8                |     | pF    |   |
| z <sub>o</sub>         | Closed-loop output impedance                                         | f = 100 kHz,                                                 | A <sub>V</sub> = 10                               | 25°C                        | 25               |     | Ω     |   |
| CMRR                   | Common-mode rejection ratio                                          | V <sub>IC</sub> = 0 to 1.5 V,<br>R <sub>S</sub> = 50 Ω       | V <sub>O</sub> = V <sub>DD</sub> /2,              | 25°C                        | 60               | 84  | dB    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 60               | 82  |       |   |
| k <sub>SVR</sub>       | Supply voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 2.7 V to 5 V,<br>No load                   | V <sub>IC</sub> = V <sub>DD</sub> /2,             | 25°C                        | 70               | 89  | dB    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 70               | 84  |       |   |
| I <sub>DD</sub>        | Supply current (per channel)                                         | V <sub>O</sub> = V <sub>DD</sub> /2,                         | No load                                           | 25°C                        | 1                | 2   | mA    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 2                |     |       |   |
| I <sub>DD</sub> (SHDN) | Supply current in shutdown (per channel)                             |                                                              |                                                   | 25°C                        | 0.8              | 1.5 | μA    |   |
|                        |                                                                      |                                                              |                                                   | Full range                  | 1.3              | 2   |       |   |
| V <sub>(ON)</sub>      | Turnon voltage level                                                 | A <sub>V</sub> = 5                                           | 25°C                                              |                             | 1.47             |     | V     |   |
|                        |                                                                      |                                                              |                                                   |                             | 1.43             |     |       |   |
|                        |                                                                      |                                                              |                                                   |                             | 1.40             |     |       |   |
| V <sub>(OFF)</sub>     | Turnoff voltage level                                                | A <sub>V</sub> = 5                                           | 25°C                                              |                             | 1.27             |     | V     |   |
|                        |                                                                      |                                                              |                                                   |                             | 1.21             |     |       |   |
|                        |                                                                      |                                                              |                                                   |                             | 1.20             |     |       |   |

$^\dagger$  Full range is 0°C to 70°C.

**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

operating characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted)

| PARAMETER              |                                             | TEST CONDITIONS                                                                           |                      | T <sub>A</sub> <sup>†</sup> | TLV277xC |     |     | UNIT   |
|------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------|----------------------|-----------------------------|----------|-----|-----|--------|
|                        |                                             |                                                                                           |                      |                             | MIN      | TYP | MAX |        |
| SR                     | Slew rate at unity gain                     | V <sub>O(PP)</sub> = 0.8 V, C <sub>L</sub> = 100 pF,<br>R <sub>L</sub> = 10 kΩ            |                      | 25°C                        | 5        | 9   |     | V/μs   |
|                        |                                             |                                                                                           |                      | Full range                  | 4.7      | 6   |     |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 1 kHz                                                                                 |                      | 25°C                        | 21       |     |     | nV/√Hz |
|                        |                                             | f = 10 kHz                                                                                |                      | 25°C                        | 17       |     |     |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                        |                      | 25°C                        | 0.33     |     |     | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                       |                      |                             | 0.86     |     |     |        |
| I <sub>n</sub>         | Equivalent input noise current              | f = 100 Hz                                                                                |                      | 25°C                        | 0.6      |     |     | fA/√Hz |
| THD + N                | Total harmonic distortion plus noise        | R <sub>L</sub> = 600 Ω,<br>f = 1 kHz                                                      | A <sub>V</sub> = 1   | 25°C                        | 0.0085%  |     |     |        |
|                        |                                             |                                                                                           | A <sub>V</sub> = 10  |                             | 0.025%   |     |     |        |
|                        |                                             |                                                                                           | A <sub>V</sub> = 100 |                             | 0.12%    |     |     |        |
| Gain-bandwidth product |                                             | f = 10 kHz, R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                            |                      | 25°C                        | 4.8      |     |     | MHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = 1 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF | 0.1%                 | 25°C                        | 0.186    |     |     | μs     |
|                        |                                             |                                                                                           | 0.01%                | 25°C                        | 0.3      |     |     |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                           |                      | 25°C                        | 46°      |     |     |        |
| Gain margin            |                                             |                                                                                           |                      | 25°C                        | 12       |     |     | dB     |

$^\dagger$  Full range is 0°C to 70°C.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER              |                                                                      | TEST CONDITIONS                                         | T <sub>A</sub> <sup>†</sup>                               | TLV277xC                                         |                  |      | UNIT  |    |
|------------------------|----------------------------------------------------------------------|---------------------------------------------------------|-----------------------------------------------------------|--------------------------------------------------|------------------|------|-------|----|
|                        |                                                                      |                                                         |                                                           | MIN                                              | TYP              | MAX  |       |    |
| V <sub>IO</sub>        | Input offset voltage                                                 | TLV2770/1/2<br><br>TLV2773/4/5                          | V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω,<br>No load | V <sub>O</sub> = 0,<br>V <sub>DD</sub> = ±2.5 V, | 25°C             | 0.5  | 2.5   | mV |
|                        |                                                                      |                                                         |                                                           |                                                  | Full range       | 0.6  | 2.7   |    |
|                        |                                                                      |                                                         |                                                           |                                                  | 25°C             | 0.7  | 2.5   |    |
|                        |                                                                      |                                                         |                                                           |                                                  | Full range       | 0.78 | 2.7   |    |
| αV <sub>IO</sub>       | Temperature coefficient of input offset voltage                      | V <sub>IC</sub> = 0,<br>R <sub>S</sub> = 50 Ω           | V <sub>O</sub> = 0,<br>V <sub>DD</sub> = ±2.5 V           | 25°C to 125°C                                    | 2                |      | μV/°C |    |
| I <sub>IO</sub>        | Input offset current                                                 |                                                         |                                                           | 25°C                                             | 1                | 60   | pA    |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 2                | 100  |       |    |
| I <sub>IB</sub>        | Input bias current                                                   |                                                         |                                                           | 25°C                                             | 2                | 60   | pA    |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 6                | 100  |       |    |
| V <sub>OH</sub>        | High-level output voltage                                            |                                                         |                                                           | I <sub>OH</sub> = −1.3 mA                        | 25°C             | 4.9  |       | V  |
|                        |                                                                      |                                                         |                                                           |                                                  | Full range       | 4.8  |       |    |
|                        |                                                                      |                                                         |                                                           | I <sub>OH</sub> = −4.2 mA                        | 25°C             | 4.7  |       |    |
|                        |                                                                      | Full range                                              | 4.4                                                       |                                                  |                  |      |       |    |
| V <sub>OL</sub>        | Low-level output voltage                                             | V <sub>IC</sub> = 2.5 V,<br>I <sub>OL</sub> = 1.3 mA    | 25°C                                                      | 0.1                                              |                  | V    |       |    |
|                        |                                                                      |                                                         | Full range                                                | 0.2                                              |                  |      |       |    |
|                        |                                                                      | V <sub>IC</sub> = 2.5 V,<br>I <sub>OL</sub> = 4.2 mA    | 25°C                                                      | 0.21                                             |                  |      |       |    |
|                        |                                                                      |                                                         | Full range                                                | 0.6                                              |                  |      |       |    |
| A <sub>VD</sub>        | Large-signal differential voltage amplification                      | V <sub>IC</sub> = 2.5 V,<br>V <sub>O</sub> = 1 V to 4 V | R <sub>L</sub> = 10 kΩ,                                   | 25°C                                             | 20               | 450  | V/mV  |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 13               |      |       |    |
| r <sub>i</sub> (d)     | Differential input resistance                                        |                                                         |                                                           | 25°C                                             | 10 <sup>12</sup> |      | Ω     |    |
| c <sub>i</sub> (c)     | Common-mode input capacitance                                        | f = 10 kHz                                              |                                                           | 25°C                                             | 8                |      | pF    |    |
| z <sub>O</sub>         | Closed-loop output impedance                                         | f = 100 kHz,                                            | A <sub>V</sub> = 10                                       | 25°C                                             | 20               |      | Ω     |    |
| CMRR                   | Common-mode rejection ratio                                          | V <sub>IC</sub> = 0 to 3.7 V,<br>R <sub>S</sub> = 50 Ω  | V <sub>O</sub> = V <sub>DD</sub> /2,                      | 25°C                                             | 70               | 96   | dB    |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 70               | 93   |       |    |
| k <sub>SVR</sub>       | Supply voltage rejection ratio (ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 2.7 V to 5 V,<br>No load              | V <sub>IC</sub> = V <sub>DD</sub> /2,                     | 25°C                                             | 70               | 89   | dB    |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 70               | 84   |       |    |
| I <sub>DD</sub>        | Supply current (per channel)                                         | V <sub>O</sub> = V <sub>DD</sub> /2,                    | No load                                                   | 25°C                                             | 1                | 2    | mA    |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 2                |      |       |    |
| I <sub>DD</sub> (SHDN) | Supply current in shutdown (per channel)                             |                                                         |                                                           | 25°C                                             | 0.8              | 1.5  | μA    |    |
|                        |                                                                      |                                                         |                                                           | Full range                                       | 1.3              | 2    |       |    |
| V <sub>(ON)</sub>      | Turnon voltage level                                                 | TLV2770                                                 | A <sub>V</sub> = 5                                        | 25°C                                             | 2.59             |      | V     |    |
|                        |                                                                      | TLV2773                                                 |                                                           |                                                  | 2.47             |      |       |    |
|                        |                                                                      | TLV2775                                                 |                                                           |                                                  | 2.48             |      |       |    |
| V <sub>(OFF)</sub>     | Turnoff voltage level                                                | TLV2770                                                 | A <sub>V</sub> = 5                                        | 25°C                                             | 2.41             |      | V     |    |
|                        |                                                                      | TLV2773                                                 |                                                           |                                                  | 2.32             |      |       |    |
|                        |                                                                      | TLV2775                                                 |                                                           |                                                  | 2.29             |      |       |    |

$^\dagger$  Full range is 0°C to 70°C.



**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER              |                                             | TEST CONDITIONS                                                                           |                                                                        | T <sub>A</sub> <sup>†</sup>     | TLV277xC   |     |      | UNIT   |    |
|------------------------|---------------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------|---------------------------------|------------|-----|------|--------|----|
|                        |                                             |                                                                                           |                                                                        |                                 | MIN        | TYP | MAX  |        |    |
| SR                     | Slew rate at unity gain                     | V <sub>O(PP)</sub> = 2 V,<br>R <sub>L</sub> = 10 kΩ                                       |                                                                        | C <sub>L</sub> = 100 pF,        | 25°C       | 5   | 10.5 | V/μs   |    |
|                        |                                             |                                                                                           |                                                                        |                                 | Full range | 4.7 | 6    |        |    |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 1 kHz                                                                                 |                                                                        | 25°C                            | 17         |     |      | nV/√Hz |    |
|                        |                                             | f = 10 kHz                                                                                |                                                                        | 25°C                            | 12         |     |      |        |    |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                        |                                                                        | 25°C                            | 0.33       |     |      | μV     |    |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                       |                                                                        |                                 | 0.86       |     |      |        |    |
| I <sub>n</sub>         | Equivalent input noise current              | f = 100 Hz                                                                                |                                                                        | 25°C                            | 0.6        |     |      | fA/√Hz |    |
| THD + N                | Total harmonic distortion plus noise        | R <sub>L</sub> = 600 Ω,<br>f = 1 kHz                                                      | A <sub>V</sub> = 1                                                     | 25°C                            | 0.005%     |     |      |        |    |
|                        |                                             |                                                                                           | A <sub>V</sub> = 10                                                    |                                 | 0.016%     |     |      |        |    |
|                        |                                             |                                                                                           | A <sub>V</sub> = 100                                                   |                                 | 0.095%     |     |      |        |    |
| Gain-bandwidth product |                                             | f = 10 kHz,<br>C <sub>L</sub> = 100 pF                                                    |                                                                        | R <sub>L</sub> = 600 Ω,<br>25°C | 5.1        |     |      | MHz    |    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = 2 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF | 0.1%                                                                   | 25°C                            | 0.335      |     |      | μs     |    |
|                        |                                             |                                                                                           | 0.01%                                                                  | 25°C                            | 0.6        |     |      |        |    |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                                        |                                                                        | 25°C                            | 46°        |     |      |        |    |
| Gain margin            |                                             |                                                                                           |                                                                        | 25°C                            | 12         |     |      | dB     |    |
| t <sub>(ON)</sub>      | Amplifier turnon time                       | TLV2770                                                                                   | A <sub>V</sub> = 5,<br>R <sub>L</sub> = Open,<br>Measured to 50% point |                                 | 25°C       | 1.2 |      |        | μs |
|                        |                                             | TLV2773                                                                                   |                                                                        |                                 |            | 2.4 |      |        |    |
|                        |                                             | TLV2775                                                                                   |                                                                        |                                 |            | 1.9 |      |        |    |
| t <sub>(OFF)</sub>     | Amplifier turnoff time                      | TLV2770                                                                                   | A <sub>V</sub> = 5<br>R <sub>L</sub> = Open,<br>Measured to 50% point  |                                 | 25°C       | 335 |      |        | ns |
|                        |                                             | TLV2773                                                                                   |                                                                        |                                 |            | 444 |      |        |    |
|                        |                                             | TLV2775                                                                                   |                                                                        |                                 |            | 345 |      |        |    |

<sup>†</sup> Full range is 0°C to 70°C.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted)

| PARAMETER      |                                                                    | TEST CONDITIONS                                                                       | $T_A$ †       | TLV277xI |                  |     | TLV277xAI |                  |     | UNIT             |
|----------------|--------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------|----------|------------------|-----|-----------|------------------|-----|------------------|
|                |                                                                    |                                                                                       |               | MIN      | TYP              | MAX | MIN       | TYP              | MAX |                  |
| $V_{IO}$       | Input offset voltage                                               | $V_{IC} = 0$ , $V_O = 0$ ,<br>$R_S = 50\ \Omega$<br>$V_{DD} = \pm 1.35$ V,<br>No load | 25°C          |          | 0.48             | 2.5 |           | 0.48             | 1.6 | mV               |
|                |                                                                    |                                                                                       | Full range    |          | 0.53             | 2.7 |           | 0.53             | 1.9 |                  |
|                |                                                                    |                                                                                       | 25°C          |          | 0.8              | 2.7 |           | 0.8              | 2.1 |                  |
|                |                                                                    |                                                                                       | Full range    |          | 0.86             | 2.9 |           | 0.86             | 2.2 |                  |
| $\alpha_{VIO}$ | Temperature coefficient of input offset voltage                    |                                                                                       | 25°C to 125°C |          | 2                |     |           | 2                |     | $\mu V/^\circ C$ |
| $I_{IO}$       | Input offset current                                               | $V_{IC} = 0$ , $V_O = 0$ ,<br>$R_S = 50\ \Omega$                                      | 25°C          |          | 1                | 60  |           | 1                | 60  | pA               |
|                |                                                                    |                                                                                       | Full range    |          | 2                | 125 |           | 2                | 125 |                  |
| $I_{IB}$       | Input bias current                                                 |                                                                                       | 25°C          |          | 2                | 60  |           | 2                | 60  | pA               |
|                |                                                                    |                                                                                       | Full range    |          | 6                | 350 |           | 6                | 350 |                  |
| $V_{OH}$       | High-level output voltage                                          | $I_{OH} = -0.675$ mA                                                                  | 25°C          |          | 2.6              |     |           | 2.6              |     | V                |
|                |                                                                    |                                                                                       | Full range    |          | 2.5              |     |           | 2.5              |     |                  |
|                |                                                                    | $I_{OH} = -2.2$ mA                                                                    | 25°C          |          | 2.4              |     |           | 2.4              |     |                  |
|                |                                                                    |                                                                                       | Full range    |          | 2.1              |     |           | 2.1              |     |                  |
| $V_{OL}$       | Low-level output voltage                                           | $V_{IC} = 1.35$ V,<br>$I_{OL} = 0.675$ mA                                             | 25°C          |          | 0.1              |     |           | 0.1              |     | V                |
|                |                                                                    |                                                                                       | Full range    |          | 0.2              |     |           | 0.2              |     |                  |
|                |                                                                    | $V_{IC} = 1.35$ V,<br>$I_{OL} = 2.2$ mA                                               | 25°C          |          | 0.21             |     |           | 0.21             |     |                  |
|                |                                                                    |                                                                                       | Full range    |          | 0.6              |     |           | 0.6              |     |                  |
| $A_{VD}$       | Large-signal differential voltage amplification                    | $V_{IC} = 1.35$ V,<br>$R_L = 10\ k\Omega$ ,<br>$V_O = 0.6$ V to 2.1 V                 | 25°C          | 20       | 380              |     | 20        | 380              |     | V/mV             |
|                |                                                                    |                                                                                       | Full range    | 13       |                  |     | 13        |                  |     |                  |
| $r_{i(d)}$     | Differential input resistance                                      |                                                                                       | 25°C          |          | 10 <sup>12</sup> |     |           | 10 <sup>12</sup> |     | $\Omega$         |
| $c_{i(c)}$     | Common-mode input capacitance                                      | $f = 10$ kHz,                                                                         | 25°C          |          | 8                |     |           | 8                |     | pF               |
| $z_o$          | Closed-loop output impedance                                       | $f = 100$ kHz,<br>$A_V = 10$                                                          | 25°C          |          | 25               |     |           | 25               |     | $\Omega$         |
| CMRR           | Common-mode rejection ratio                                        | $V_{IC} = 0$ to 1.5 V,<br>$V_O = V_{DD}/2$ ,<br>$R_S = 50\ \Omega$                    | 25°C          | 60       | 84               |     | 60        | 84               |     | dB               |
|                |                                                                    |                                                                                       | Full range    | 60       | 82               |     | 60        | 82               |     |                  |
| $k_{SVR}$      | Supply voltage rejection ratio ( $\Delta V_{DD} / \Delta V_{IO}$ ) | $V_{DD} = 2.7$ V to 5 V,<br>$V_{IC} = V_{DD}/2$ ,<br>No load                          | 25°C          | 70       | 89               |     | 70        | 89               |     | dB               |
|                |                                                                    |                                                                                       | Full range    | 70       | 84               |     | 70        | 84               |     |                  |
| $I_{DD}$       | Supply current (per channel)                                       | $V_O = V_{DD}/2$ ,<br>No load                                                         | 25°C          |          | 1                | 2   |           | 1                | 2   | mA               |
|                |                                                                    |                                                                                       | Full range    |          |                  | 2   |           |                  | 2   |                  |
| $I_{DD(SHDN)}$ | Supply current in shutdown (per channel)                           |                                                                                       | 25°C          |          | 0.8              | 1.5 |           | 0.8              | 1.5 | $\mu A$          |
|                |                                                                    |                                                                                       | Full range    |          | 1.3              | 2   |           | 1.3              | 2   |                  |

† Full range is  $-40^\circ C$  to  $125^\circ C$ .

**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

**electrical characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted) (continued)**

| PARAMETER          |                       | TEST CONDITIONS | T <sub>A</sub> <sup>†</sup> | TLV277xI |      |     | TLV277xAI |      |     | UNIT |   |
|--------------------|-----------------------|-----------------|-----------------------------|----------|------|-----|-----------|------|-----|------|---|
|                    |                       |                 |                             | MIN      | TYP  | MAX | MIN       | TYP  | MAX |      |   |
| V <sub>(ON)</sub>  | Turnon voltage level  | TLV2770         | A <sub>V</sub> = 5          | 25°C     | 1.47 |     |           | 1.47 |     |      | V |
|                    |                       | TLV2773         |                             |          | 1.43 |     |           | 1.43 |     |      |   |
|                    |                       | TLV2775         |                             |          | 1.40 |     |           | 1.4  |     |      |   |
| V <sub>(OFF)</sub> | Turnoff voltage level | TLV2770         | A <sub>V</sub> = 5          | 25°C     | 1.27 |     |           | 1.27 |     |      | V |
|                    |                       | TLV2773         |                             |          | 1.21 |     |           | 1.21 |     |      |   |
|                    |                       | TLV2775         |                             |          | 1.20 |     |           | 1.2  |     |      |   |

$^\dagger$  Full range is – 40°C to 125°C.

**operating characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted)**

| PARAMETER          |                                             | TEST CONDITIONS                                                                               |                      | T <sub>A</sub> <sup>†</sup> | TLV277xI |     |     | TLV277xAI |     |     | UNIT   |
|--------------------|---------------------------------------------|-----------------------------------------------------------------------------------------------|----------------------|-----------------------------|----------|-----|-----|-----------|-----|-----|--------|
|                    |                                             |                                                                                               |                      |                             | MIN      | TYP | MAX | MIN       | TYP | MAX |        |
| SR                 | Slew rate at unity gain                     | V <sub>O(PP)</sub> = 0.8 V, C <sub>L</sub> = 100 pF, R <sub>L</sub> = 10 kΩ                   |                      | 25°C                        | 5        | 9   |     | 5         | 9   |     | V/μs   |
|                    |                                             |                                                                                               |                      | Full range                  | 4.7      | 6   |     | 4.7       | 6   |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 1 kHz                                                                                     |                      | 25°C                        | 21       |     |     | 21        |     |     | nV/√Hz |
|                    |                                             | f = 10 kHz                                                                                    |                      | 25°C                        | 17       |     |     | 17        |     |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                            |                      | 25°C                        | 0.33     |     |     | 0.33      |     |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                           |                      | 25°C                        | 0.86     |     |     | 0.86      |     |     | μV     |
| I <sub>n</sub>     | Equivalent input noise current              | f = 100 Hz                                                                                    |                      | 25°C                        | 0.6      |     |     | 0.6       |     |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | R <sub>L</sub> = 600 Ω, f = 1 kHz                                                             | A <sub>V</sub> = 1   | 25°C                        | 0.0085%  |     |     | 0.0085%   |     |     |        |
|                    |                                             |                                                                                               | A <sub>V</sub> = 10  |                             | 0.025%   |     |     | 0.025%    |     |     |        |
|                    |                                             |                                                                                               | A <sub>V</sub> = 100 |                             | 0.12%    |     |     | 0.12%     |     |     |        |
|                    | Gain-bandwidth product                      | f = 10 kHz, R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                   | 25°C                 | 4.8                         |          |     | 4.8 |           |     | MHz |        |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1, Step = 0.85 V to 1.85 V, R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF | 0.1%                 | 25°C                        | 0.186    |     |     | 0.186     |     |     | μs     |
|                    |                                             |                                                                                               | 0.01%                | 25°C                        | 3.92     |     |     | 3.92      |     |     |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                               |                      | 25°C                        | 46°      |     |     | 46°       |     |     |        |
|                    | Gain margin                                 |                                                                                               |                      | 25°C                        | 12       |     |     | 12        |     |     | dB     |

$^\dagger$  Full range is – 40°C to 125°C.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER              |                                                                         | TEST CONDITIONS                                                                                           | T <sub>A</sub> <sup>†</sup> | TLV277xI |                  |     | TLV277xAI        |      |       | UNIT |
|------------------------|-------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------|-----------------------------|----------|------------------|-----|------------------|------|-------|------|
|                        |                                                                         |                                                                                                           |                             | MIN      | TYP              | MAX | MIN              | TYP  | MAX   |      |
| V <sub>IO</sub>        | Input offset voltage                                                    | V <sub>IC</sub> = 0, No load<br>V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>DD</sub> = ±2.5 V | 25°C                        |          | 0.5              | 2.5 |                  | 0.5  | 1.6   | mV   |
|                        |                                                                         |                                                                                                           | Full range                  |          | 0.6              | 2.7 |                  | 0.6  | 1.9   |      |
|                        |                                                                         |                                                                                                           | 25°C                        |          | 0.7              | 2.5 |                  | 0.7  | 2.1   |      |
|                        |                                                                         |                                                                                                           | Full range                  |          | 0.78             | 2.7 |                  | 0.78 | 2.2   |      |
| α <sub>VIO</sub>       | Temperature coefficient of input offset voltage                         | V <sub>IC</sub> = 0,<br>V <sub>O</sub> = 0,<br>R <sub>S</sub> = 50 Ω,<br>V <sub>DD</sub> = ±2.5 V         | 25°C to 125°C               |          | 2                |     | 2                |      | μV/°C |      |
| I <sub>IO</sub>        | Input offset current                                                    |                                                                                                           | 25°C                        |          | 1                | 60  |                  | 1    | 60    | pA   |
| I <sub>IB</sub>        | Input bias current                                                      |                                                                                                           | Full range                  |          | 2                | 125 |                  | 2    | 125   |      |
|                        |                                                                         |                                                                                                           | 25°C                        |          | 2                | 60  |                  | 2    | 60    | pA   |
| V <sub>OH</sub>        | High-level output voltage                                               | I <sub>OH</sub> = −1.3 mA                                                                                 | 25°C                        |          | 4.9              |     | 4.9              |      | V     |      |
|                        |                                                                         |                                                                                                           | Full range                  |          | 4.8              |     | 4.8              |      |       |      |
|                        |                                                                         | I <sub>OH</sub> = −4.2 mA                                                                                 | 25°C                        |          | 4.7              |     | 4.7              |      |       |      |
|                        |                                                                         |                                                                                                           | Full range                  |          | 4.4              |     | 4.4              |      |       |      |
| V <sub>OL</sub>        | Low-level output voltage                                                | V <sub>IC</sub> = 2.5 V,<br>I <sub>OL</sub> = 1.3 mA                                                      | 25°C                        |          | 0.1              |     | 0.1              |      | V     |      |
|                        |                                                                         |                                                                                                           | Full range                  |          | 0.2              |     | 0.2              |      |       |      |
|                        |                                                                         | V <sub>IC</sub> = 2.5 V,<br>I <sub>OL</sub> = 4.2 mA                                                      | 25°C                        |          | 0.21             |     | 0.21             |      |       |      |
|                        |                                                                         |                                                                                                           | Full range                  |          | 0.6              |     | 0.6              |      |       |      |
| A <sub>VD</sub>        | Large-signal differential voltage amplification                         | V <sub>IC</sub> = 2.5 V,<br>R <sub>L</sub> = 10 kΩ,<br>V <sub>O</sub> = 1 V to 4 V                        | 25°C                        | 20       | 450              |     | 20               | 450  | V/mV  |      |
|                        |                                                                         |                                                                                                           | Full range                  | 13       |                  |     | 13               |      |       |      |
| r <sub>i(d)</sub>      | Differential input resistance                                           |                                                                                                           | 25°C                        |          | 10 <sup>12</sup> |     | 10 <sup>12</sup> |      | Ω     |      |
| c <sub>i(c)</sub>      | Common-mode input capacitance                                           | f = 10 kHz                                                                                                | 25°C                        |          | 8                |     | 8                |      | pF    |      |
| z <sub>o</sub>         | Closed-loop output impedance                                            | f = 100 kHz,<br>A <sub>V</sub> = 10                                                                       | 25°C                        |          | 20               |     | 20               |      | Ω     |      |
| CMRR                   | Common-mode rejection ratio                                             | V <sub>IC</sub> = 0 to 3.7 V,<br>V <sub>O</sub> = V <sub>DD</sub> /2,<br>R <sub>S</sub> = 50 Ω            | 25°C                        | 60       | 96               |     | 70               | 96   | dB    |      |
|                        |                                                                         |                                                                                                           | Full range                  | 60       | 93               |     | 70               | 93   |       |      |
| k <sub>SVR</sub>       | Supply voltage rejection ratio<br>(ΔV <sub>DD</sub> /ΔV <sub>IO</sub> ) | V <sub>DD</sub> = 2.7 V to 5 V,<br>V <sub>IC</sub> = V <sub>DD</sub> /2,<br>No load                       | 25°C                        | 70       | 89               |     | 70               | 89   | dB    |      |
|                        |                                                                         |                                                                                                           | Full range                  | 70       | 84               |     | 70               | 84   |       |      |
| I <sub>DD</sub>        | Supply current (per channel)                                            | V <sub>O</sub> = V <sub>DD</sub> /2,<br>No load                                                           | 25°C                        |          | 1                | 2   |                  | 1    | 2     | mA   |
|                        |                                                                         |                                                                                                           | Full range                  |          |                  | 2   |                  |      | 2     |      |
| I <sub>DD</sub> (SHDN) | Supply current shutdown (per channel)                                   |                                                                                                           | 25°C                        |          | 0.8              | 1.5 |                  | 0.8  | 1.5   | μA   |
|                        |                                                                         |                                                                                                           | Full range                  |          | 1.3              | 2   |                  | 1.3  | 2     |      |

<sup>†</sup> Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)  
(continued)

| PARAMETER          |                       | TEST CONDITIONS | T <sub>A</sub> <sup>†</sup> | TLV277xI |      |     | TLV277xAI |      |     | UNIT |   |
|--------------------|-----------------------|-----------------|-----------------------------|----------|------|-----|-----------|------|-----|------|---|
|                    |                       |                 |                             | MIN      | TYP  | MAX | MIN       | TYP  | MAX |      |   |
| V <sub>(ON)</sub>  | Turnon voltage level  | TLV2770         | A <sub>V</sub> = 5          | 25°C     | 2.59 |     |           | 2.59 |     |      | V |
|                    |                       | TLV2773         |                             |          | 2.47 |     |           | 2.47 |     |      |   |
|                    |                       | TLV2775         |                             |          | 2.48 |     |           | 2.48 |     |      |   |
| V <sub>(OFF)</sub> | Turnoff voltage level | TLV2770         | A <sub>V</sub> = 5          | 25°C     | 2.41 |     |           | 2.41 |     |      | V |
|                    |                       | TLV2773         |                             |          | 2.32 |     |           | 2.32 |     |      |   |
|                    |                       | TLV2775         |                             |          | 2.29 |     |           | 2.29 |     |      |   |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER              |                                             | TEST CONDITIONS                                                                             |                                                                  | T <sub>A</sub> <sup>†</sup> | TLV277xI |      |     | TLV277xAI |      |     | UNIT   |
|------------------------|---------------------------------------------|---------------------------------------------------------------------------------------------|------------------------------------------------------------------|-----------------------------|----------|------|-----|-----------|------|-----|--------|
|                        |                                             |                                                                                             |                                                                  |                             | MIN      | TYP  | MAX | MIN       | TYP  | MAX |        |
| SR                     | Slew rate at unity gain                     | V <sub>O(PP)</sub> = 1.5 V, C <sub>L</sub> = 100 pF, R <sub>L</sub> = 10 kΩ                 |                                                                  | 25°C                        | 5        | 10.5 |     | 5         | 10.5 |     | V/μs   |
|                        |                                             |                                                                                             |                                                                  | Full range                  | 4.7      | 6    |     | 4.7       | 6    |     |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 1 kHz                                                                                   |                                                                  | 25°C                        | 17       |      |     | 17        |      |     | nV/√Hz |
|                        |                                             | f = 10 kHz                                                                                  |                                                                  | 25°C                        | 12       |      |     | 12        |      |     |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                          |                                                                  | 25°C                        | 0.33     |      |     | 0.33      |      |     | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                         |                                                                  | 25°C                        | 0.86     |      |     | 0.86      |      |     | μV     |
| I <sub>n</sub>         | Equivalent input noise current              | f = 100 Hz                                                                                  |                                                                  | 25°C                        | 0.6      |      |     | 0.6       |      |     | fA/√Hz |
| THD + N                | Total harmonic distortion plus noise        | R <sub>L</sub> = 600 Ω, f = 1 kHz                                                           | A <sub>V</sub> = 1                                               | 25°C                        | 0.005%   |      |     | 0.005%    |      |     |        |
|                        |                                             |                                                                                             | A <sub>V</sub> = 10                                              |                             | 0.016%   |      |     | 0.016%    |      |     |        |
|                        |                                             |                                                                                             | A <sub>V</sub> = 100                                             |                             | 0.095%   |      |     | 0.095%    |      |     |        |
| Gain-bandwidth product |                                             | f = 10 kHz, C <sub>L</sub> = 100 pF                                                         | R <sub>L</sub> = 600 Ω,                                          | 25°C                        | 5.1      |      |     | 5.1       |      |     | MHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1, Step = 1.5 V to 3.5 V, R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF | 0.1%                                                             | 25°C                        | 0.134    |      |     | 0.134     |      |     | μs     |
|                        |                                             |                                                                                             | 0.01%                                                            | 25°C                        | 1.97     |      |     | 1.97      |      |     |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                             |                                                                  | 25°C                        | 46°      |      |     | 46°       |      |     |        |
| Gain margin            |                                             |                                                                                             |                                                                  | 25°C                        | 12       |      |     | 12        |      |     | dB     |
| t <sub>(ON)</sub>      | Amplifier turnon time                       | TLV2770                                                                                     | A <sub>V</sub> = 5, R <sub>L</sub> = Open, Measured to 50% point | 25°C                        | 1.2      |      |     | 1.2       |      |     | μs     |
|                        |                                             | TLV2773                                                                                     |                                                                  |                             | 2.4      |      |     | 2.4       |      |     |        |
|                        |                                             | TLV2775                                                                                     |                                                                  |                             | 1.9      |      |     | 1.9       |      |     |        |
| t <sub>(OFF)</sub>     | Amplifier turnoff time                      | TLV2770                                                                                     | A <sub>V</sub> = 5, R <sub>L</sub> = Open, Measured to 50% point | 25°C                        | 335      |      |     | 335       |      |     | ns     |
|                        |                                             | TLV2773                                                                                     |                                                                  |                             | 444      |      |     | 444       |      |     |        |
|                        |                                             | TLV2775                                                                                     |                                                                  |                             | 345      |      |     | 345       |      |     |        |

$^\dagger$  Full range is  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ .

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted)

| PARAMETER                                                                    | TEST CONDITIONS                                                               | $T_A$ †       | TLV2772Q<br>TLV2772M |             |     | TLV2772AQ<br>TLV2772AM |             |     | UNIT             |
|------------------------------------------------------------------------------|-------------------------------------------------------------------------------|---------------|----------------------|-------------|-----|------------------------|-------------|-----|------------------|
|                                                                              |                                                                               |               | MIN                  | TYP         | MAX | MIN                    | TYP         | MAX |                  |
| $V_{IO}$ Input offset voltage                                                | $V_{DD} = \pm 1.35$ V,<br>$V_{IC} = 0$ ,<br>$R_S = 50\ \Omega$<br>$V_O = 0$ , | 25°C          |                      | 0.44        | 2.5 |                        | 0.44        | 1.6 | mV               |
|                                                                              |                                                                               | Full range    |                      | 0.47        | 2.7 |                        | 0.47        | 1.9 |                  |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage               |                                                                               | 25°C to 125°C |                      | 2           |     |                        | 2           |     | $\mu V/^\circ C$ |
| $I_{IO}$ Input offset current                                                |                                                                               | 25°C          |                      | 1           | 60  |                        | 1           | 60  | pA               |
|                                                                              |                                                                               | Full range    |                      | 2           | 125 |                        | 2           | 125 |                  |
| $I_{IB}$ Input bias current                                                  |                                                                               | 25°C          |                      | 2           | 60  |                        | 2           | 60  | pA               |
|                                                                              |                                                                               | Full range    |                      | 6           | 350 |                        | 6           | 350 |                  |
| $V_{ICR}$ Common-mode input voltage range                                    | CMRR > 60 dB, $R_S = 50\ \Omega$                                              | 25°C          | 0 to 1.4             | -0.3 to 1.7 |     | 0 to 1.4               | -0.3 to 1.7 |     | V                |
|                                                                              |                                                                               | Full range    | 0 to 1.4             | -0.3 to 1.7 |     | 0 to 1.4               | -0.3 to 1.7 |     |                  |
| $V_{OH}$ High-level output voltage                                           | $I_{OH} = -0.675$ mA                                                          | 25°C          |                      | 2.6         |     |                        | 2.6         |     | V                |
|                                                                              |                                                                               | Full range    |                      | 2.45        |     |                        | 2.45        |     |                  |
|                                                                              | $I_{OH} = -2.2$ mA                                                            | 25°C          |                      | 2.4         |     |                        | 2.4         |     |                  |
|                                                                              |                                                                               | Full range    |                      | 2.1         |     |                        | 2.1         |     |                  |
| $V_{OL}$ Low-level output voltage                                            | $V_{IC} = 1.35$ V, $I_{OL} = 0.675$ mA                                        | 25°C          |                      | 0.1         |     |                        | 0.1         |     | V                |
|                                                                              |                                                                               | Full range    |                      |             | 0.2 |                        |             | 0.2 |                  |
|                                                                              | $V_{IC} = 1.35$ V, $I_{OL} = 2.2$ mA                                          | 25°C          |                      | 0.21        |     |                        | 0.21        |     |                  |
|                                                                              |                                                                               | Full range    |                      |             | 0.6 |                        |             | 0.6 |                  |
| $A_{VD}$ Large-signal differential voltage amplification                     | $V_{IC} = 1.35$ V, $V_O = 0.6$ V to 2.1 V<br>$R_L = 10\ k\Omega$ ,‡           | 25°C          | 20                   | 380         |     | 20                     | 380         |     | V/mV             |
|                                                                              |                                                                               | Full range    | 13                   |             |     | 13                     |             |     |                  |
| $r_{i(d)}$ Differential input resistance                                     |                                                                               | 25°C          |                      | $10^{12}$   |     |                        | $10^{12}$   |     | $\Omega$         |
| $C_{i(c)}$ Common-mode input capacitance                                     | $f = 10$ kHz,                                                                 | 25°C          |                      | 8           |     |                        | 8           |     | pF               |
| $z_o$ Closed-loop output impedance                                           | $f = 100$ kHz, $A_V = 10$                                                     | 25°C          |                      | 25          |     |                        | 25          |     | $\Omega$         |
| CMRR Common-mode rejection ratio                                             | $V_{IC} = V_{ICR}$ (min), $V_O = 1.5$ V,<br>$R_S = 50\ \Omega$                | 25°C          | 60                   | 84          |     | 60                     | 84          |     | dB               |
|                                                                              |                                                                               | Full range    | 60                   | 82          |     | 60                     | 82          |     |                  |
| $k_{SVR}$ Supply voltage rejection ratio ( $\Delta V_{DD} / \Delta V_{IO}$ ) | $V_{DD} = 2.7$ V to 5 V, No load<br>$V_{IC} = V_{DD}/2$ ,                     | 25°C          | 70                   | 89          |     | 70                     | 89          |     | dB               |
|                                                                              |                                                                               | Full range    | 70                   | 84          |     | 70                     | 84          |     |                  |
| $I_{DD}$ Supply current (per channel)                                        | $V_O = 1.5$ V, No load                                                        | 25°C          |                      | 1           | 2   |                        | 1           | 2   | mA               |
|                                                                              |                                                                               | Full range    |                      |             | 2   |                        |             | 2   |                  |

† Full range is -40°C to 125°C for Q level part, -55°C to 125°C for M level part.

‡ Referenced to 1.35 V

**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

operating characteristics at specified free-air temperature,  $V_{DD} = 2.7$  V (unless otherwise noted)

| PARAMETER              |                                             | TEST CONDITIONS                                                                                        |                      | T <sub>A</sub> <sup>†</sup> | TLV2772Q<br>TLV2772M |     |     | TLV2772AQ<br>TLV2772AM |     |     | UNIT   |
|------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------|----------------------|-----------------------------|----------------------|-----|-----|------------------------|-----|-----|--------|
|                        |                                             |                                                                                                        |                      |                             | MIN                  | TYP | MAX | MIN                    | TYP | MAX |        |
| SR                     | Slew rate at unity gain                     | V <sub>O(PP)</sub> = 0.8 V, C <sub>L</sub> = 100 pF,<br>R <sub>L</sub> = 10 kΩ                         |                      | 25°C                        | 5                    | 9   |     | 5                      | 9   |     | V/μs   |
|                        |                                             |                                                                                                        |                      | Full range                  | 4.7                  | 6   |     | 4.7                    | 6   |     |        |
| V <sub>n</sub>         | Equivalent input noise voltage              | f = 1 kHz                                                                                              |                      | 25°C                        | 21                   |     |     | 21                     |     |     | nV/√Hz |
|                        |                                             | f = 10 kHz                                                                                             |                      | 25°C                        | 17                   |     |     | 17                     |     |     |        |
| V <sub>N(PP)</sub>     | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                                     |                      | 25°C                        | 0.33                 |     |     | 0.33                   |     |     | μV     |
|                        |                                             | f = 0.1 Hz to 10 Hz                                                                                    |                      | 25°C                        | 0.86                 |     |     | 0.86                   |     |     | μV     |
| I <sub>n</sub>         | Equivalent input noise current              | f = 100 Hz                                                                                             |                      | 25°C                        | 0.6                  |     |     | 0.6                    |     |     | fA/√Hz |
| THD + N                | Total harmonic distortion plus noise        | R <sub>L</sub> = 600 Ω,<br>f = 1 kHz                                                                   | A <sub>V</sub> = 1   | 25°C                        | 0.0085%              |     |     | 0.0085%                |     |     |        |
|                        |                                             |                                                                                                        | A <sub>V</sub> = 10  |                             | 0.025%               |     |     | 0.025%                 |     |     |        |
|                        |                                             |                                                                                                        | A <sub>V</sub> = 100 |                             | 0.12%                |     |     | 0.12%                  |     |     |        |
| Gain-bandwidth product |                                             | f = 10 kHz, R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF                                         |                      | 25°C                        | 4.8                  |     |     | 4.8                    |     |     | MHz    |
| t <sub>s</sub>         | Settling time                               | A <sub>V</sub> = −1,<br>Step = 0.85 V to 1.85 V,<br>R <sub>L</sub> = 600 Ω,<br>C <sub>L</sub> = 100 pF | 0.1%                 | 25°C                        | 0.186                |     |     | 0.186                  |     |     | μs     |
|                        |                                             |                                                                                                        | 0.01%                | 25°C                        | 3.92                 |     |     | 3.92                   |     |     |        |
| φ <sub>m</sub>         | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                                        |                      | 25°C                        | 46°                  |     |     | 46°                    |     |     |        |
| Gain margin            |                                             |                                                                                                        |                      | 25°C                        | 12                   |     |     | 12                     |     |     | dB     |

$^\dagger$  Full range is –40°C to 125°C for Q level part, –55°C to 125°C for M level part.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT

### OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

electrical characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER                                                                  | TEST CONDITIONS                                                                                        | $T_A^\dagger$ | TLV2772Q<br>TLV2772M |             |     | TLV2772AQ<br>TLV2772AM |             |     | UNIT                         |
|----------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------|---------------|----------------------|-------------|-----|------------------------|-------------|-----|------------------------------|
|                                                                            |                                                                                                        |               | MIN                  | TYP         | MAX | MIN                    | TYP         | MAX |                              |
| $V_{IO}$ Input offset voltage                                              | $V_{DD} = \pm 2.5\text{ V}$ ,<br>$V_{IC} = 0$ ,<br>$V_O = 0$ ,<br>$R_S = 50\ \Omega$                   | 25°C          |                      | 0.36        | 2.5 |                        | 0.36        | 1.6 | mV                           |
|                                                                            |                                                                                                        | Full range    |                      | 0.4         | 2.7 |                        | 0.4         | 1.9 |                              |
| $\alpha_{VIO}$ Temperature coefficient of input offset voltage             |                                                                                                        | 25°C to 125°C |                      | 2           |     |                        | 2           |     | $\mu\text{V}/^\circ\text{C}$ |
| $I_{IO}$ Input offset current                                              |                                                                                                        | 25°C          |                      | 1           | 60  |                        | 1           | 60  | pA                           |
|                                                                            |                                                                                                        | Full range    |                      | 2           | 125 |                        | 2           | 125 |                              |
| $I_{IB}$ Input bias current                                                |                                                                                                        | 25°C          |                      | 2           | 60  |                        | 2           | 60  | pA                           |
|                                                                            |                                                                                                        | Full range    |                      | 6           | 350 |                        | 6           | 350 |                              |
| $V_{ICR}$ Common-mode input voltage range                                  | CMRR > 60 dB, $R_S = 50\ \Omega$                                                                       | 25°C          | 0 to 3.7             | -0.3 to 3.8 |     | 0 to 3.7               | -0.3 to 3.8 |     | V                            |
|                                                                            |                                                                                                        | Full range    | 0 to 3.7             | -0.3 to 3.8 |     | 0 to 3.7               | -0.3 to 3.8 |     |                              |
| $V_{OH}$ High-level output voltage                                         | $I_{OH} = -1.3\text{ mA}$                                                                              | 25°C          |                      | 4.9         |     |                        | 4.9         |     | V                            |
|                                                                            |                                                                                                        | Full range    |                      | 4.8         |     |                        | 4.8         |     |                              |
|                                                                            | $I_{OH} = -4.2\text{ mA}$                                                                              | 25°C          |                      | 4.7         |     |                        | 4.7         |     |                              |
|                                                                            |                                                                                                        | Full range    |                      | 4.4         |     |                        | 4.4         |     |                              |
| $V_{OL}$ Low-level output voltage                                          | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 1.3\text{ mA}$                                                     | 25°C          |                      | 0.1         |     |                        | 0.1         |     | V                            |
|                                                                            |                                                                                                        | Full range    |                      |             | 0.2 |                        |             | 0.2 |                              |
|                                                                            | $V_{IC} = 2.5\text{ V}$ , $I_{OL} = 4.2\text{ mA}$                                                     | 25°C          |                      | 0.21        |     |                        | 0.21        |     |                              |
|                                                                            |                                                                                                        | Full range    |                      |             | 0.6 |                        |             | 0.6 |                              |
| $A_{VD}$ Large-signal differential voltage amplification                   | $V_{IC} = 2.5\text{ V}$ ,<br>$V_O = 1\text{ V to }4\text{ V}$ ,<br>$R_L = 10\text{ k}\Omega,^\ddagger$ | 25°C          | 20                   | 450         |     | 20                     | 450         |     | V/mV                         |
|                                                                            |                                                                                                        | Full range    | 13                   |             |     | 13                     |             |     |                              |
| $r_{i(d)}$ Differential input resistance                                   |                                                                                                        | 25°C          |                      | $10^{12}$   |     |                        | $10^{12}$   |     | $\Omega$                     |
| $C_{i(c)}$ Common-mode input capacitance                                   | $f = 10\text{ kHz}$ ,                                                                                  | 25°C          |                      | 8           |     |                        | 8           |     | pF                           |
| $z_o$ Closed-loop output impedance                                         | $f = 100\text{ kHz}$ , $A_V = 10$                                                                      | 25°C          |                      | 20          |     |                        | 20          |     | $\Omega$                     |
| $\text{CMRR}$ Common-mode rejection ratio                                  | $V_{IC} = V_{ICR}(\text{min})$ ,<br>$R_S = 50\ \Omega$ , $V_O = 3.7\text{ V}$                          | 25°C          | 60                   | 96          |     | 60                     | 96          |     | dB                           |
|                                                                            |                                                                                                        | Full range    | 60                   | 93          |     | 60                     | 93          |     |                              |
| $k_{SVR}$ Supply voltage rejection ratio ( $\Delta V_{DD}/\Delta V_{IO}$ ) | $V_{DD} = 2.7\text{ V to }5\text{ V}$ ,<br>No load, $V_{IC} = V_{DD}/2$                                | 25°C          | 70                   | 89          |     | 70                     | 89          |     | dB                           |
|                                                                            |                                                                                                        | Full range    | 70                   | 84          |     | 70                     | 84          |     |                              |
| $I_{DD}$ Supply current (per channel)                                      | $V_O = 1.5\text{ V}$ ,<br>No load                                                                      | 25°C          |                      | 1           | 2   |                        | 1           | 2   | mA                           |
|                                                                            |                                                                                                        | Full range    |                      |             | 2   |                        |             | 2   |                              |

$^\dagger$  Full range is -40°C to 125°C for Q level part, -55°C to 125°C for M level part.

$^\ddagger$  Referenced to 2.5 V



**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

operating characteristics at specified free-air temperature,  $V_{DD} = 5\text{ V}$  (unless otherwise noted)

| PARAMETER          |                                             | TEST CONDITIONS                                                                                |                         | T <sub>A</sub> <sup>†</sup> | TLV2772Q<br>TLV2772M |      |     | TLV2772AQ<br>TLV2772AM |      |     | UNIT   |
|--------------------|---------------------------------------------|------------------------------------------------------------------------------------------------|-------------------------|-----------------------------|----------------------|------|-----|------------------------|------|-----|--------|
|                    |                                             |                                                                                                |                         |                             | MIN                  | TYP  | MAX | MIN                    | TYP  | MAX |        |
| SR                 | Slew rate at unity gain                     | V <sub>O(PP)</sub> = 1.5 V, C <sub>L</sub> = 100 pF,<br>R <sub>L</sub> = 10 kΩ                 |                         | 25°C                        | 5                    | 10.5 |     | 5                      | 10.5 |     | V/μs   |
|                    |                                             |                                                                                                |                         | Full range                  | 4.7                  | 6    |     | 4.7                    | 6    |     |        |
| V <sub>n</sub>     | Equivalent input noise voltage              | f = 1 kHz                                                                                      |                         | 25°C                        | 17                   |      |     | 17                     |      |     | nV/√Hz |
|                    |                                             | f = 10 kHz                                                                                     |                         | 25°C                        | 12                   |      |     | 12                     |      |     |        |
| V <sub>N(PP)</sub> | Peak-to-peak equivalent input noise voltage | f = 0.1 Hz to 1 Hz                                                                             |                         | 25°C                        | 0.33                 |      |     | 0.33                   |      |     | μV     |
|                    |                                             | f = 0.1 Hz to 10 Hz                                                                            |                         | 25°C                        | 0.86                 |      |     | 0.86                   |      |     | μV     |
| I <sub>n</sub>     | Equivalent input noise current              | f = 100 Hz                                                                                     |                         | 25°C                        | 0.6                  |      |     | 0.6                    |      |     | fA/√Hz |
| THD + N            | Total harmonic distortion plus noise        | R <sub>L</sub> = 600 Ω,<br>f = 1 kHz                                                           | A <sub>V</sub> = 1      | 25°C                        | 0.005%               |      |     | 0.005%                 |      |     |        |
|                    |                                             |                                                                                                | A <sub>V</sub> = 10     |                             | 0.016%               |      |     | 0.016%                 |      |     |        |
|                    |                                             |                                                                                                | A <sub>V</sub> = 100    |                             | 0.095%               |      |     | 0.095%                 |      |     |        |
|                    | Gain-bandwidth product                      | f = 10 kHz, C <sub>L</sub> = 100 pF                                                            | R <sub>L</sub> = 600 Ω, | 25°C                        | 5.1                  |      |     | 5.1                    |      |     | MHz    |
| t <sub>s</sub>     | Settling time                               | A <sub>V</sub> = −1, Step = 1.5 V to 3.5 V,<br>R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF | 0.1%                    | 25°C                        | 0.134                |      |     | 0.134                  |      |     | μs     |
|                    |                                             |                                                                                                | 0.01%                   | 25°C                        | 1.97                 |      |     | 1.97                   |      |     |        |
| φ <sub>m</sub>     | Phase margin at unity gain                  | R <sub>L</sub> = 600 Ω, C <sub>L</sub> = 100 pF                                                |                         | 25°C                        | 46°                  |      |     | 46°                    |      |     |        |
|                    | Gain margin                                 |                                                                                                |                         | 25°C                        | 12                   |      |     | 12                     |      |     | dB     |

<sup>†</sup> Full range is -40°C to 125°C for Q level part, -55°C to 125°C for M level part.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

Table of Graphs

|                 |                                                                  |                                                              | FIGURE            |
|-----------------|------------------------------------------------------------------|--------------------------------------------------------------|-------------------|
| $V_{IO}$        | Input offset voltage                                             | Distribution<br>vs Common-mode input voltage<br>Distribution | 1,2<br>3,4<br>5,6 |
| $I_{IB}/I_{IO}$ | Input bias and input offset currents                             | vs Free-air temperature                                      | 7                 |
| $V_{OH}$        | High-level output voltage                                        | vs High-level output current                                 | 8,9               |
| $V_{OL}$        | Low-level output voltage                                         | vs Low-level output current                                  | 10,11             |
| $V_{O(PP)}$     | Maximum peak-to-peak output voltage                              | vs Frequency                                                 | 12,13             |
| $I_{OS}$        | Short-circuit output current                                     | vs Supply voltage<br>vs Free-air temperature                 | 14<br>15          |
| $V_O$           | Output voltage                                                   | vs Differential input voltage                                | 16                |
| $A_{VD}$        | Large-signal differential voltage amplification and phase margin | vs Frequency                                                 | 17,18             |
| $A_{VD}$        | Differential voltage amplification                               | vs Load resistance<br>vs Free-air temperature                | 19<br>20,21       |
| $z_o$           | Output impedance                                                 | vs Frequency                                                 | 22,23             |
| CMRR            | Common-mode rejection ratio                                      | vs Frequency<br>vs Free-air temperature                      | 24<br>25          |
| $k_{SVR}$       | Supply-voltage rejection ratio                                   | vs Frequency                                                 | 26,27             |
| $I_{DD}$        | Supply current (per channel)                                     | vs Supply voltage                                            | 28                |
| SR              | Slew rate                                                        | vs Load capacitance<br>vs Free-air temperature               | 29<br>30          |
| $V_O$           | Voltage-follower small-signal pulse response                     |                                                              | 31,32             |
| $V_O$           | Voltage-follower large-signal pulse response                     |                                                              | 33,34             |
| $V_O$           | Inverting small-signal pulse response                            |                                                              | 35,36             |
| $V_O$           | Inverting large-signal pulse response                            |                                                              | 37,38             |
| $V_n$           | Equivalent input noise voltage                                   | vs Frequency                                                 | 39,40             |
|                 | Noise voltage (referred to input)                                | Over a 10-second period                                      | 41                |
| THD + N         | Total harmonic distortion plus noise                             | vs Frequency                                                 | 42,43             |
|                 | Gain-bandwidth product                                           | vs Supply voltage                                            | 44                |
| $B_1$           | Unity-gain bandwidth                                             | vs Load capacitance                                          | 45                |
| $\phi_m$        | Phase margin                                                     | vs Load capacitance                                          | 46                |
|                 | Gain margin                                                      | vs Load capacitance                                          | 47                |
|                 | Amplifier with shutdown pulse turnon/off characteristics         |                                                              | 48 – 50           |
|                 | Supply current with shutdown pulse turnon/off characteristics    |                                                              | 51 – 53           |
|                 | Shutdown supply current                                          | vs Free-air temperature                                      | 54                |
|                 | Shutdown forward/reverse isolation                               | vs Frequency                                                 | 55, 56            |

# TLV277x, TLV277xA FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

## TYPICAL CHARACTERISTICS

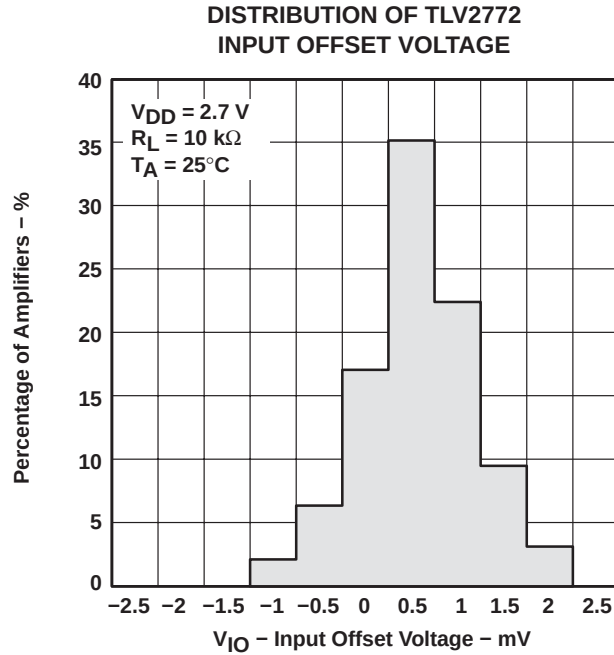


Figure 1

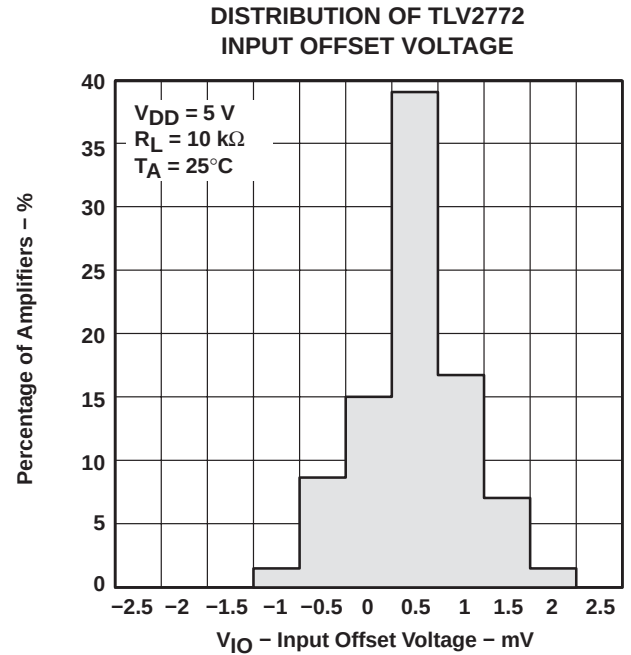


Figure 2

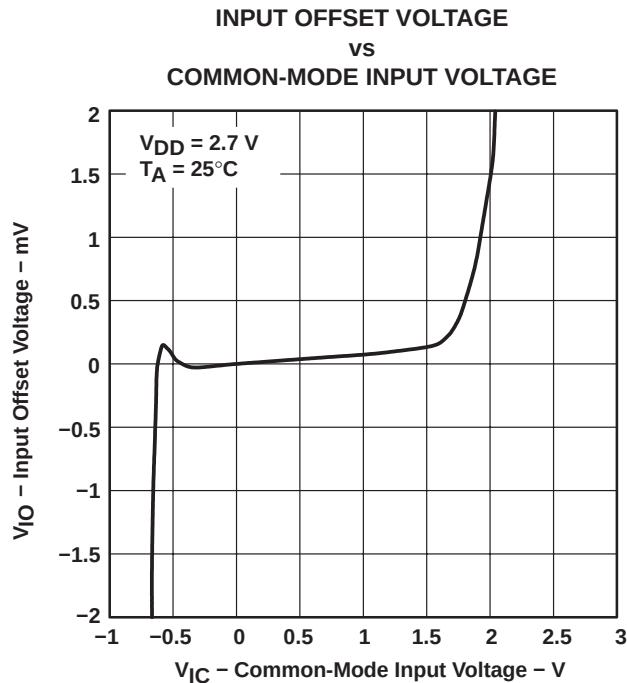


Figure 3

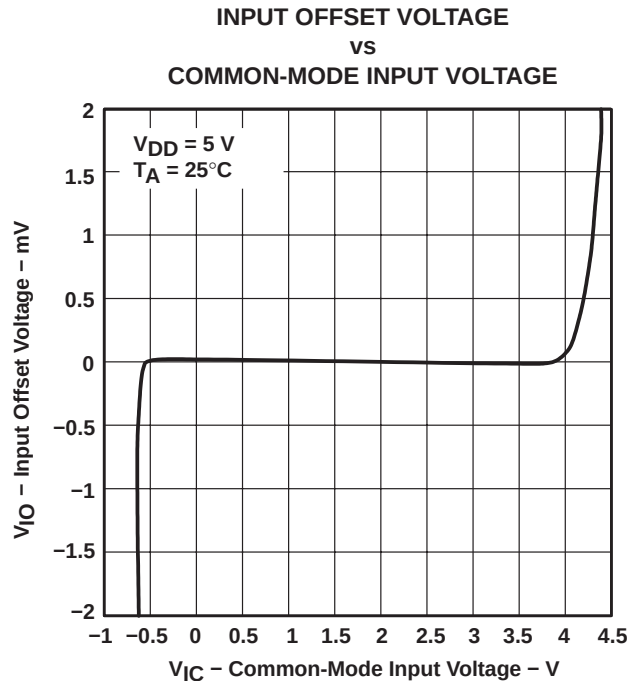


Figure 4

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

DISTRIBUTION OF TLV2772  
INPUT OFFSET VOLTAGE

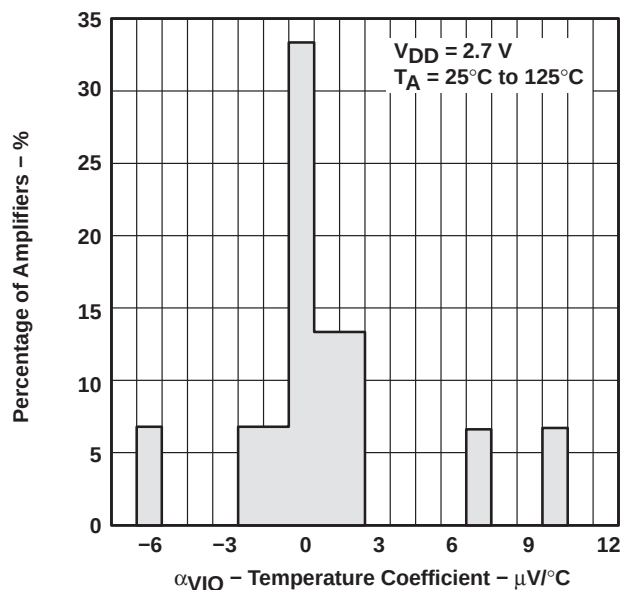


Figure 5

DISTRIBUTION OF TLV2772  
INPUT OFFSET VOLTAGE

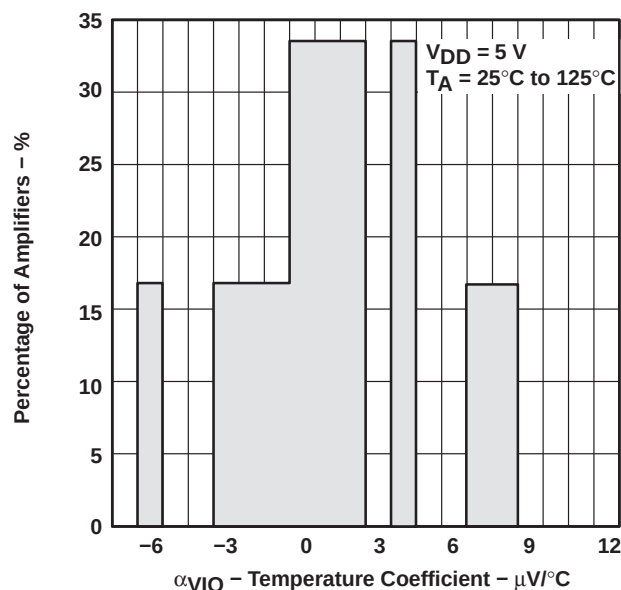


Figure 6

INPUT BIAS AND OFFSET CURRENT  
VS  
FREE-AIR TEMPERATURE

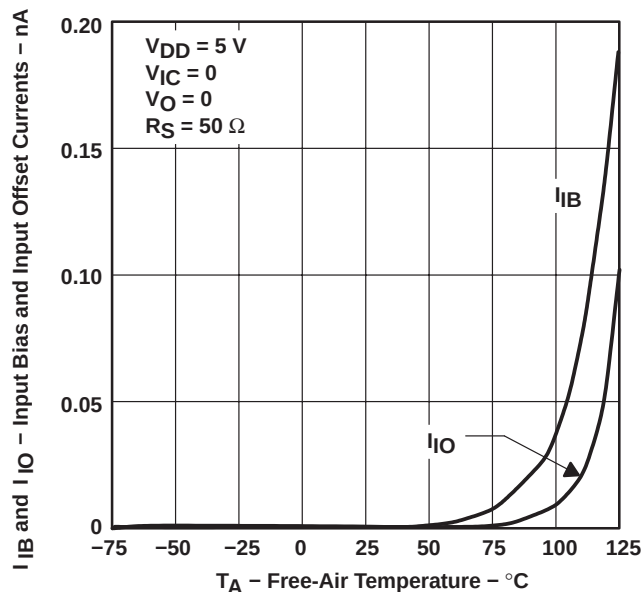


Figure 7

HIGH-LEVEL OUTPUT VOLTAGE  
VS  
HIGH-LEVEL OUTPUT CURRENT

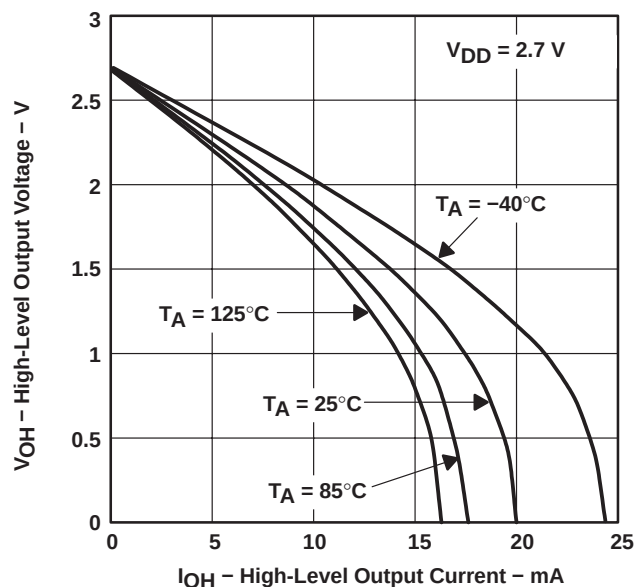


Figure 8

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

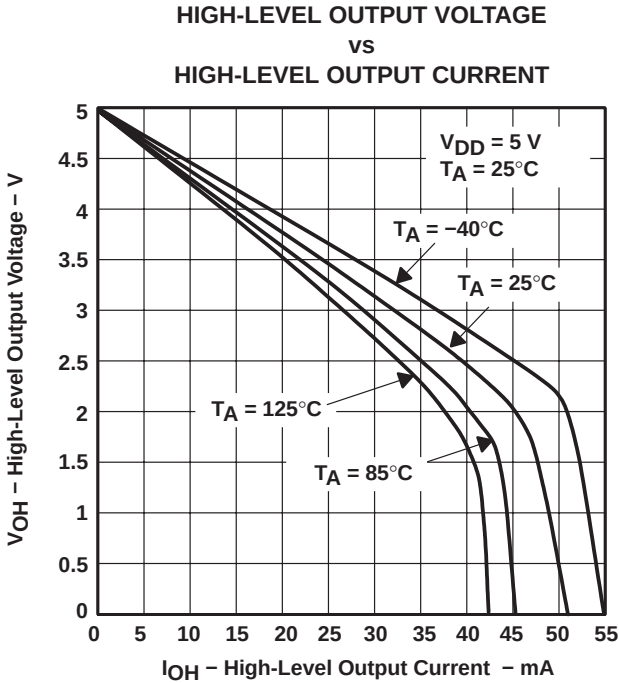


Figure 9

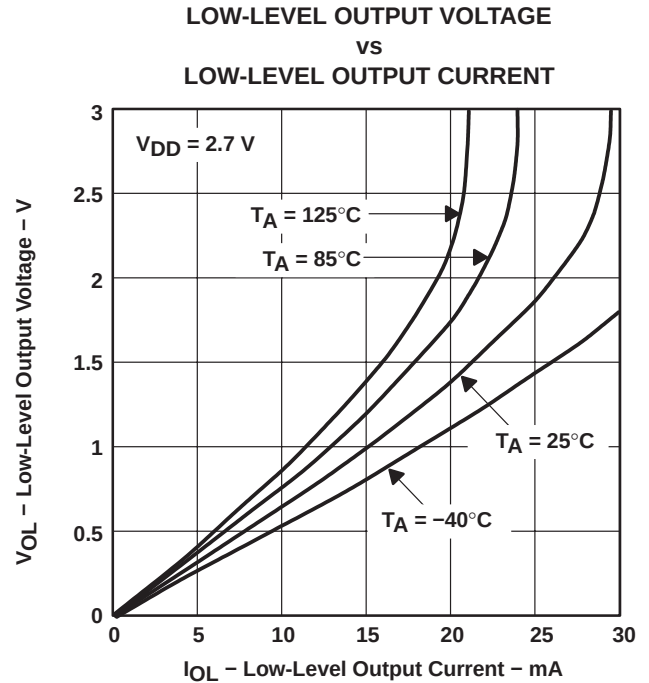


Figure 10

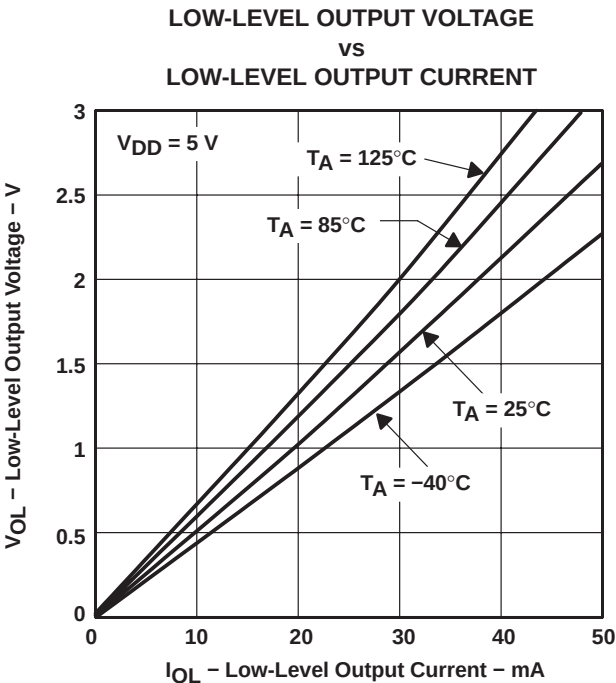


Figure 11

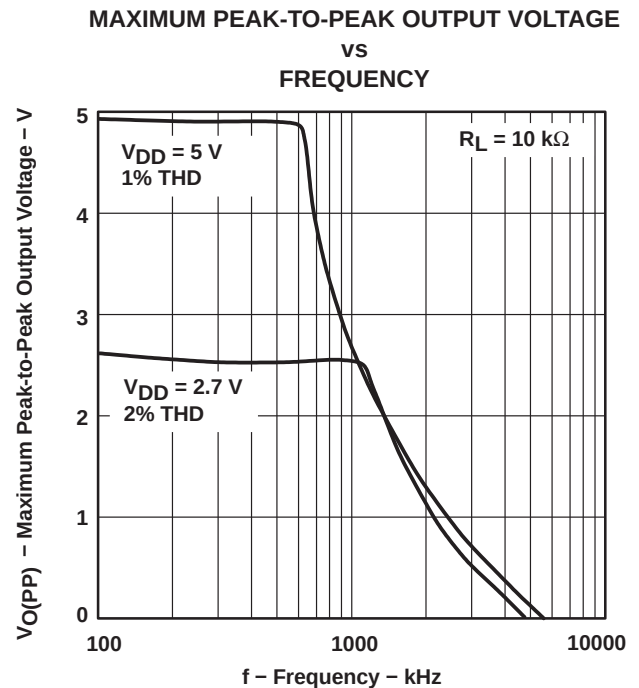


Figure 12

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

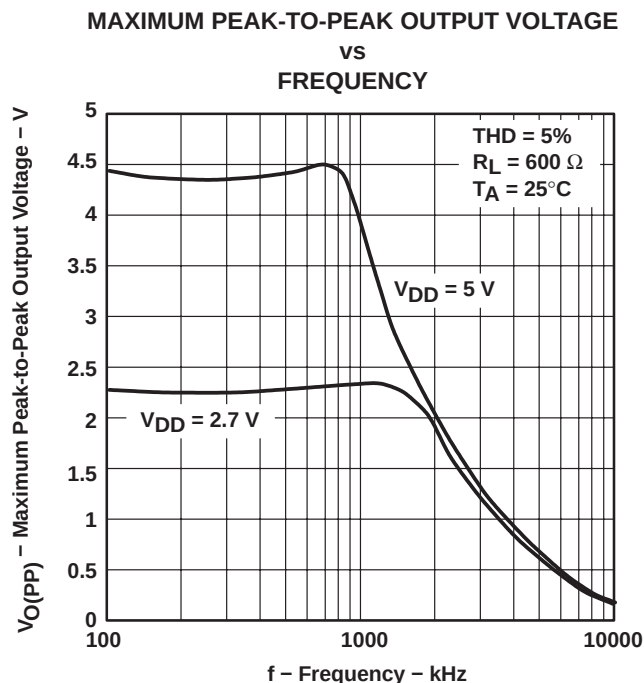


Figure 13

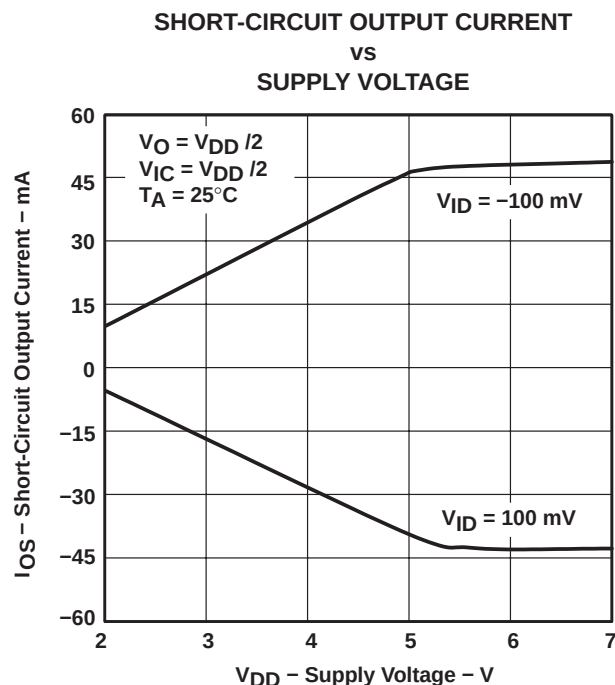


Figure 14

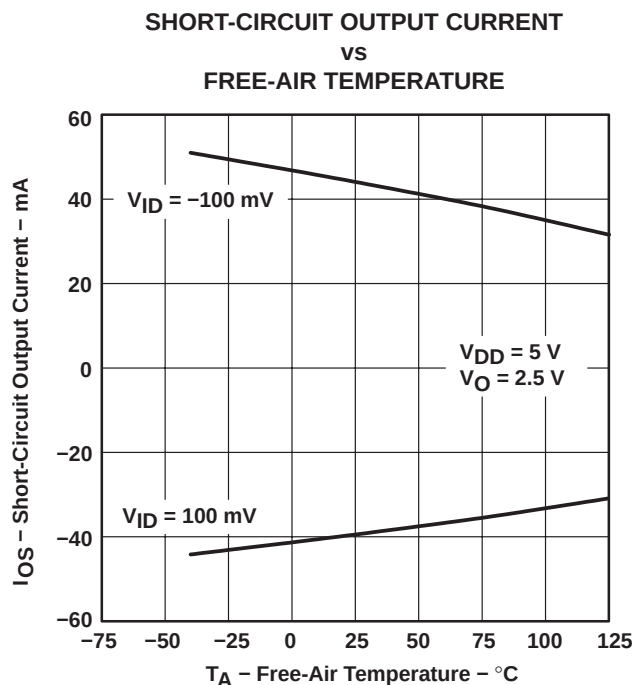


Figure 15

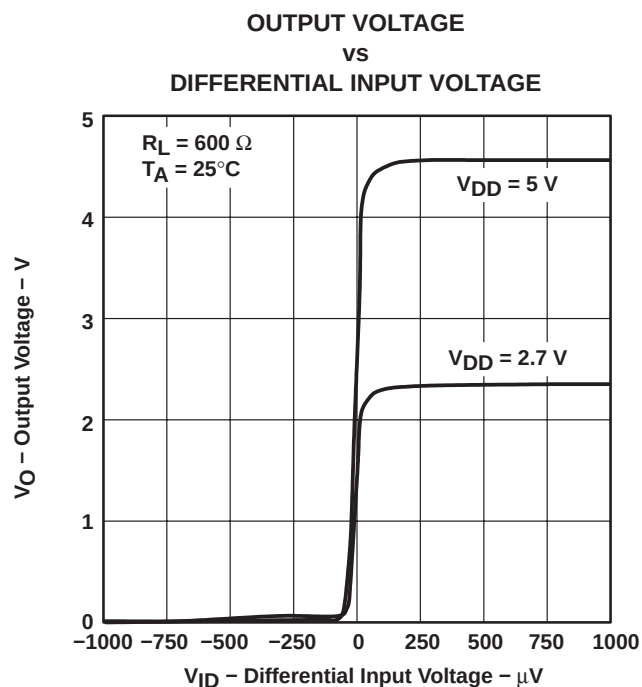


Figure 16

**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

**TYPICAL CHARACTERISTICS**

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION  
AND PHASE MARGIN  
vs  
FREQUENCY**

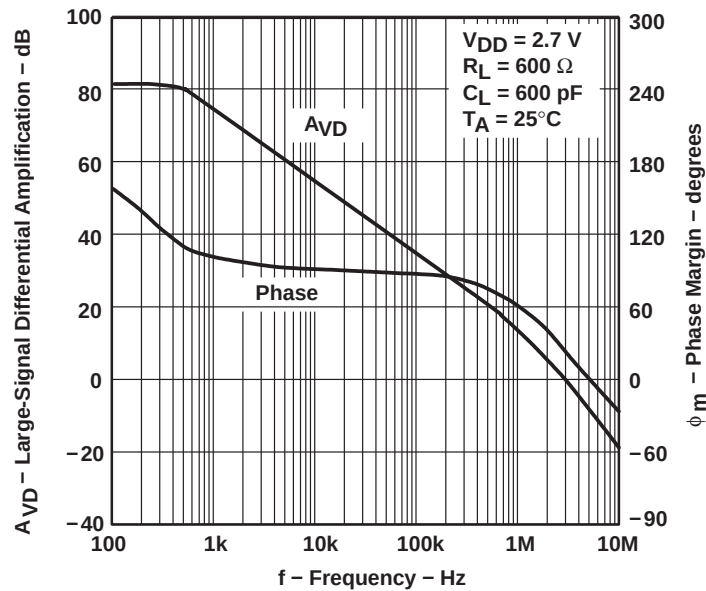


Figure 17

**LARGE-SIGNAL DIFFERENTIAL VOLTAGE AMPLIFICATION  
AND PHASE MARGIN  
vs  
FREQUENCY**

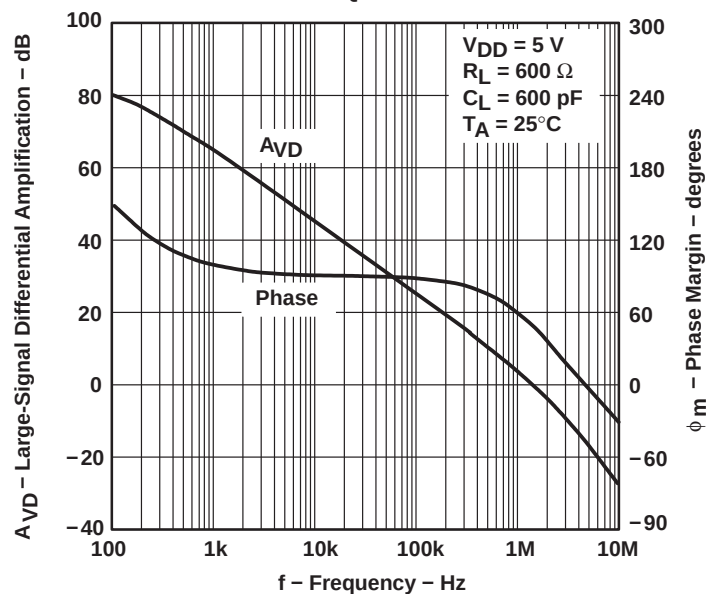


Figure 18

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

DIFFERENTIAL VOLTAGE AMPLIFICATION  
VS  
LOAD RESISTANCE

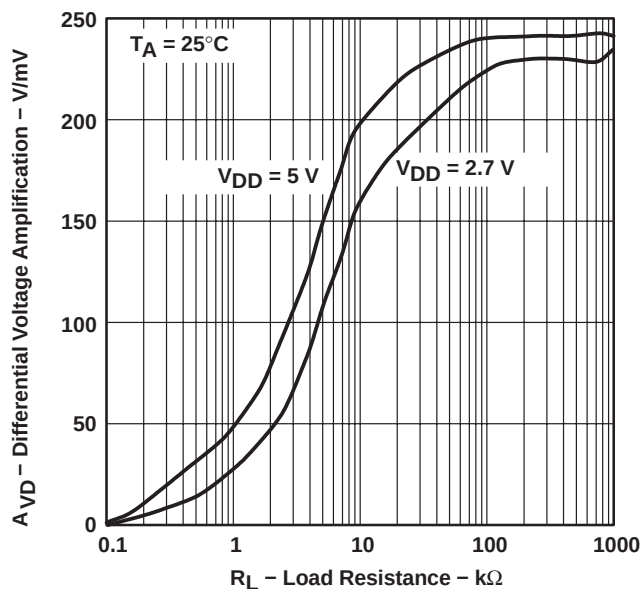


Figure 19

DIFFERENTIAL VOLTAGE AMPLIFICATION  
VS  
FREE-AIR TEMPERATURE

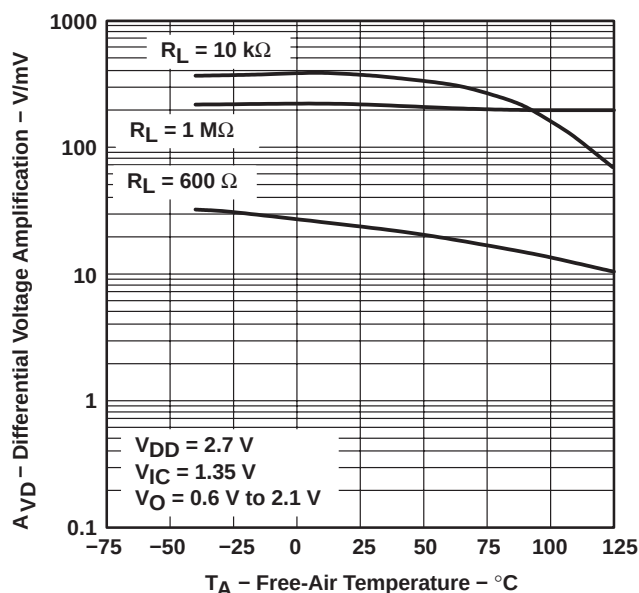


Figure 20

DIFFERENTIAL VOLTAGE AMPLIFICATION  
VS  
FREE-AIR TEMPERATURE

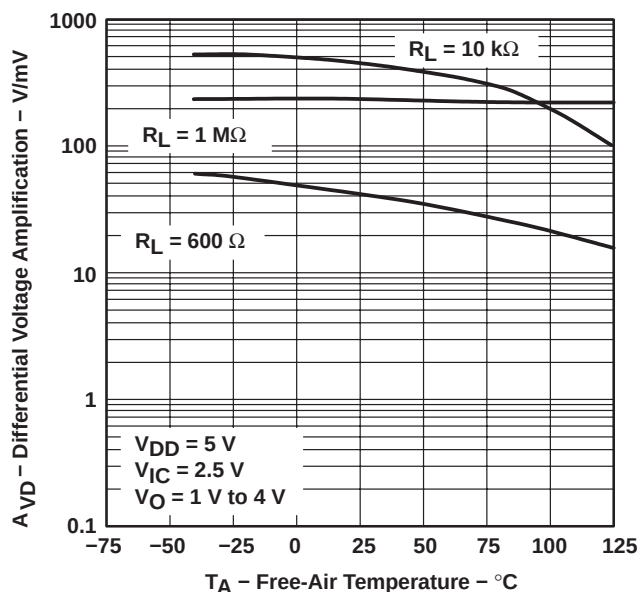


Figure 21

OUTPUT IMPEDANCE  
VS  
FREQUENCY

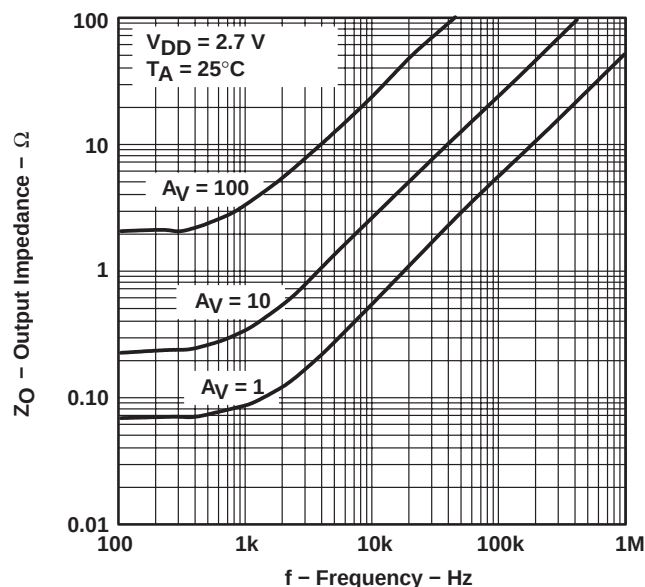


Figure 22



# TLV277x, TLV277xA FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

## TYPICAL CHARACTERISTICS

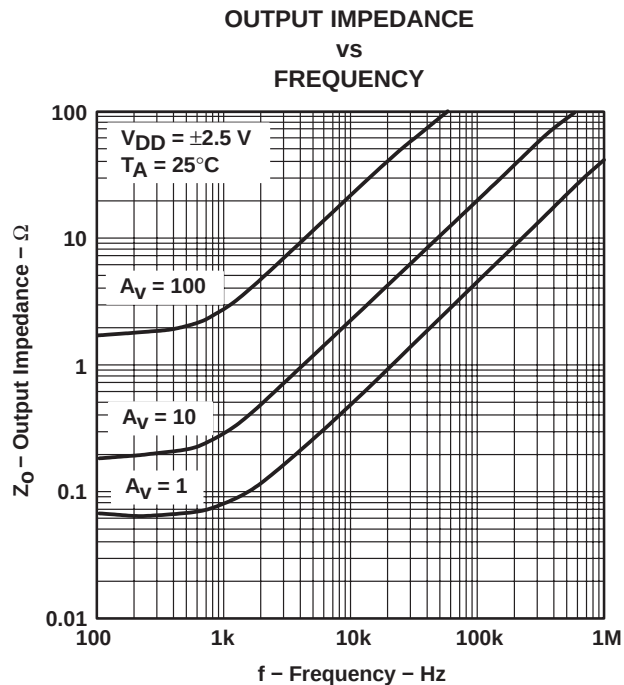


Figure 23

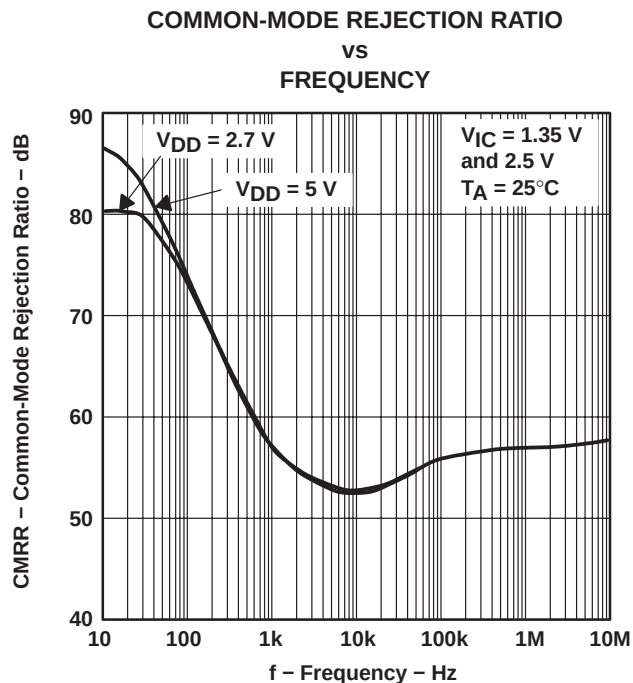


Figure 24

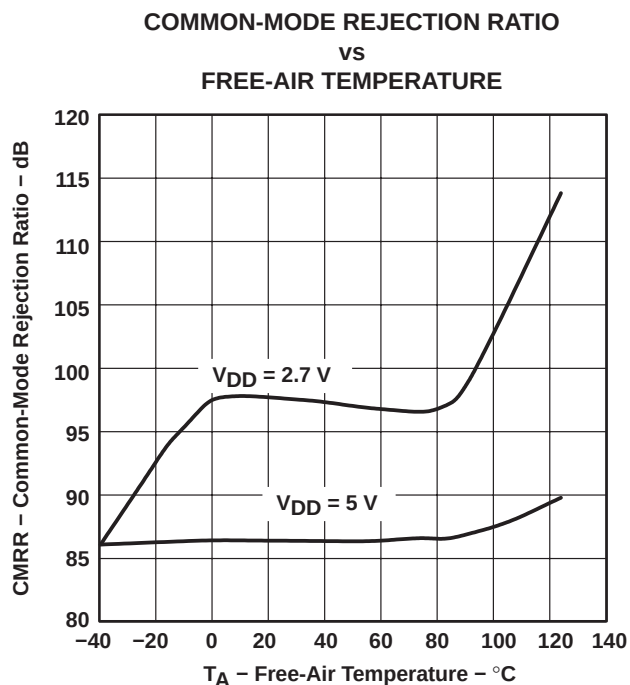


Figure 25

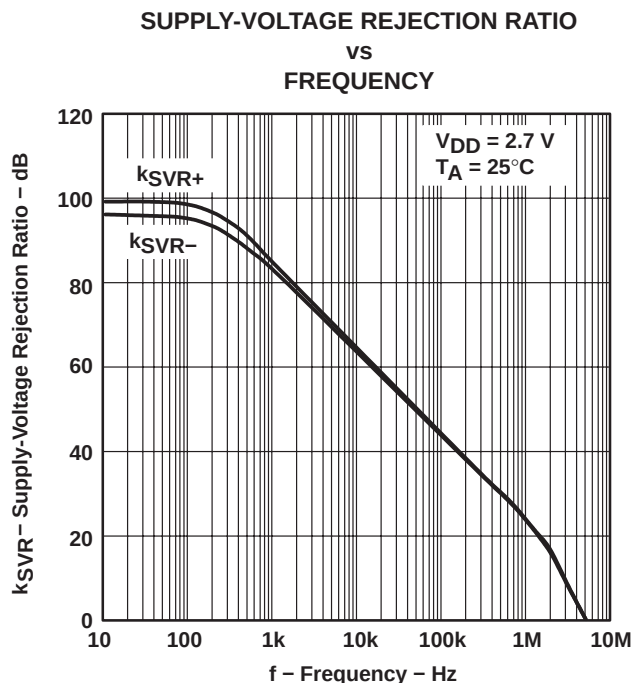






Figure 26

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

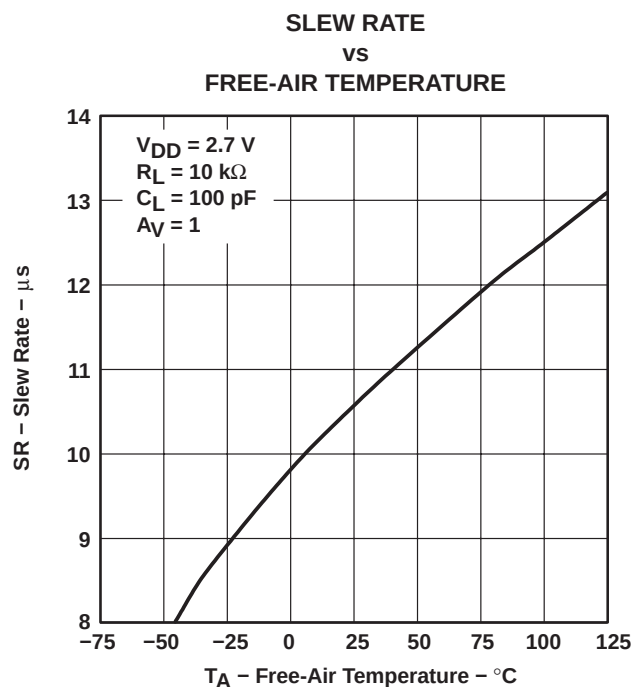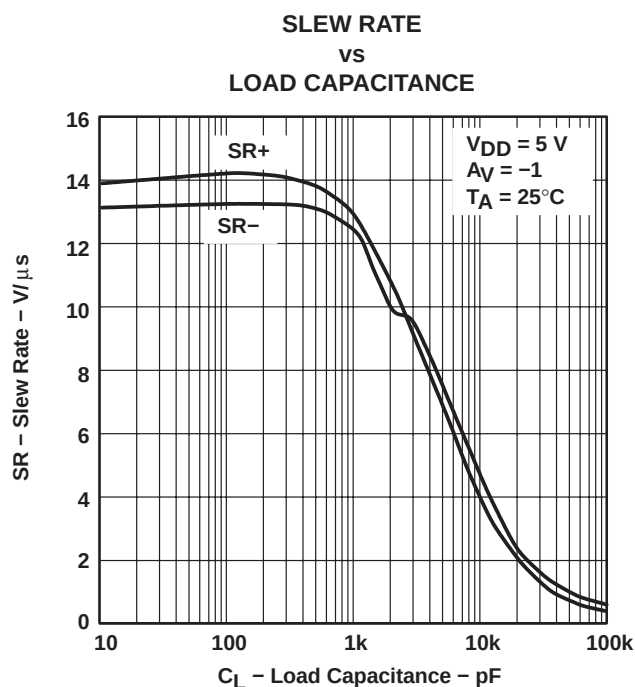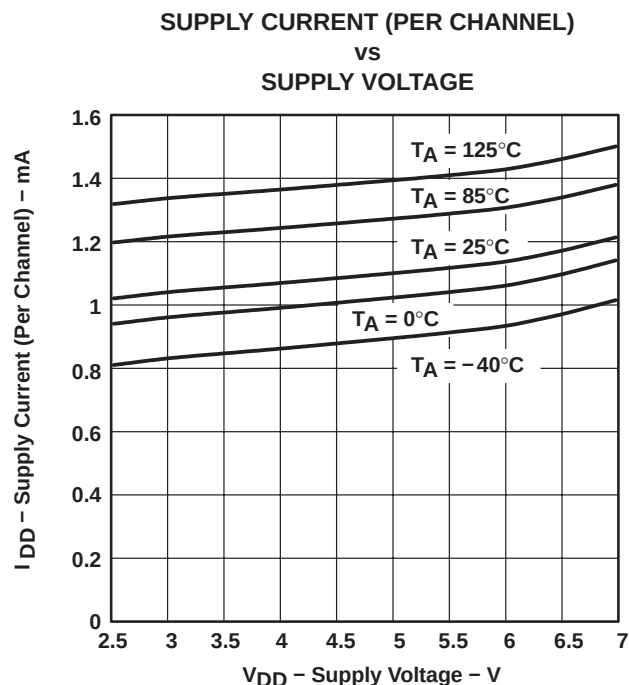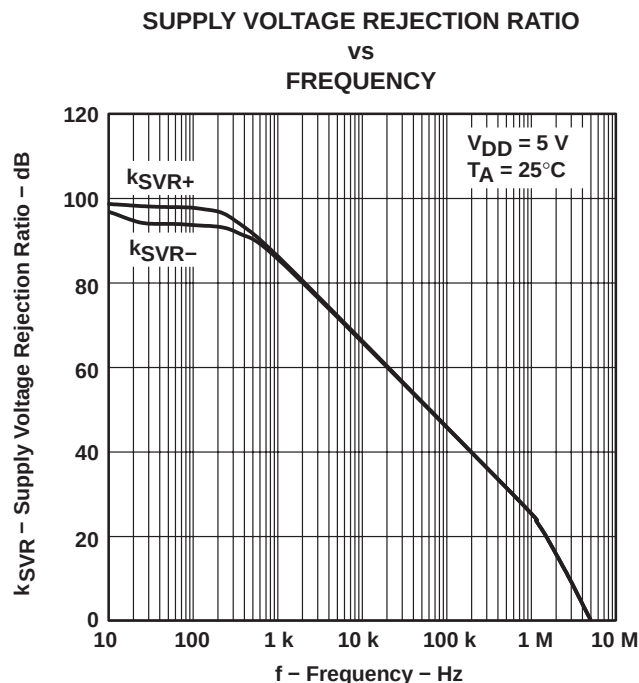

# TLV277x, TLV277xA FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

## TYPICAL CHARACTERISTICS

VOLTAGE-FOLLOWER  
SMALL-SIGNAL PULSE RESPONSE

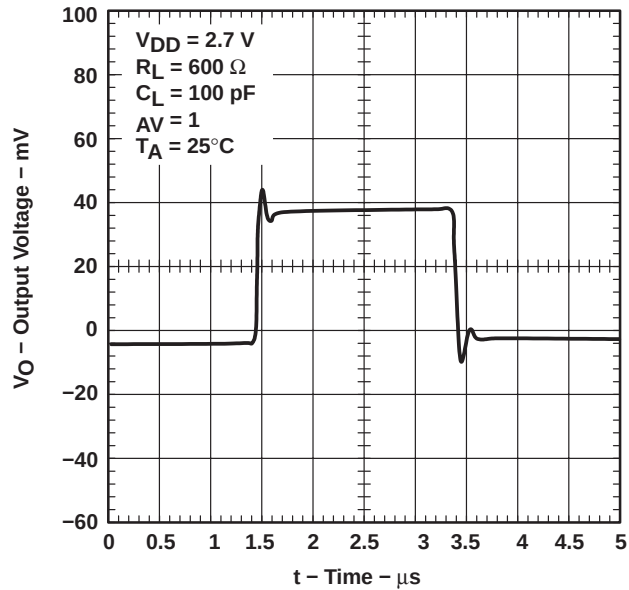


Figure 31

VOLTAGE-FOLLOWER  
SMALL-SIGNAL PULSE RESPONSE

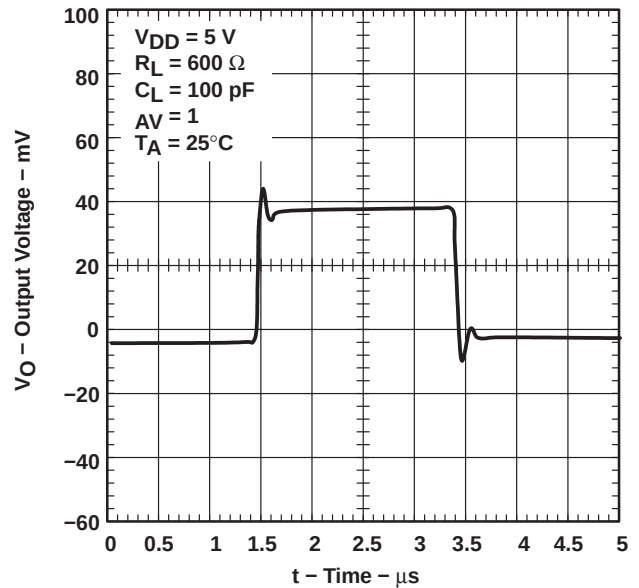


Figure 32

VOLTAGE-FOLLOWER  
LARGE-SIGNAL PULSE RESPONSE

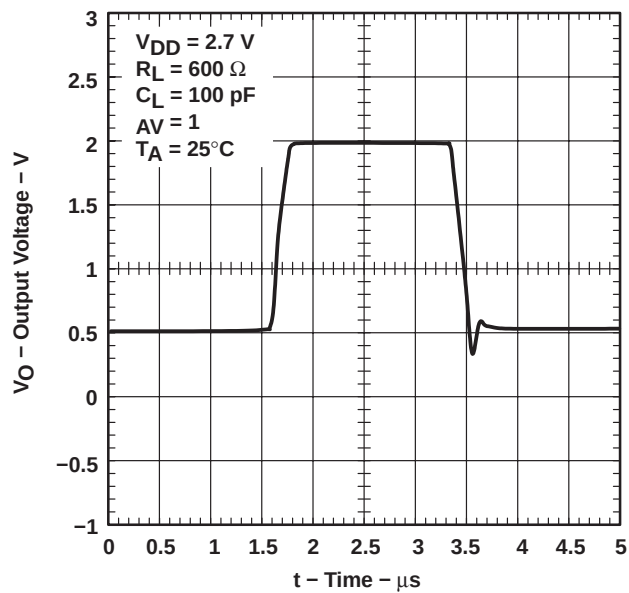


Figure 33

VOLTAGE-FOLLOWER  
LARGE-SIGNAL PULSE RESPONSE

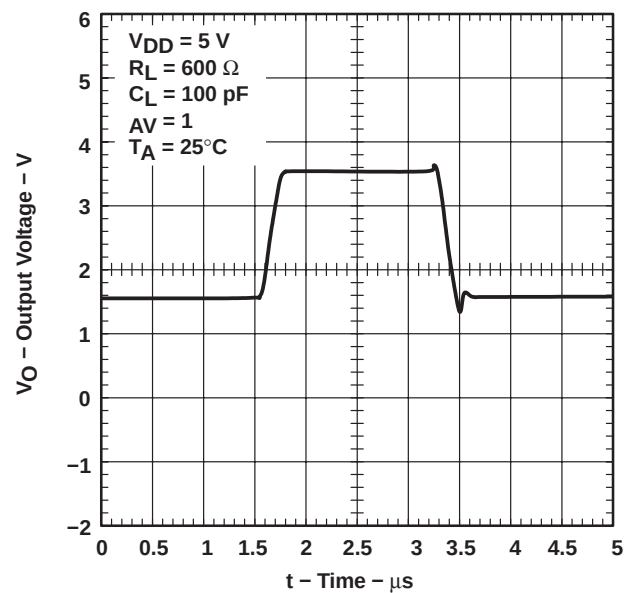


Figure 34

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

INVERTING SMALL-SIGNAL PULSE RESPONSE

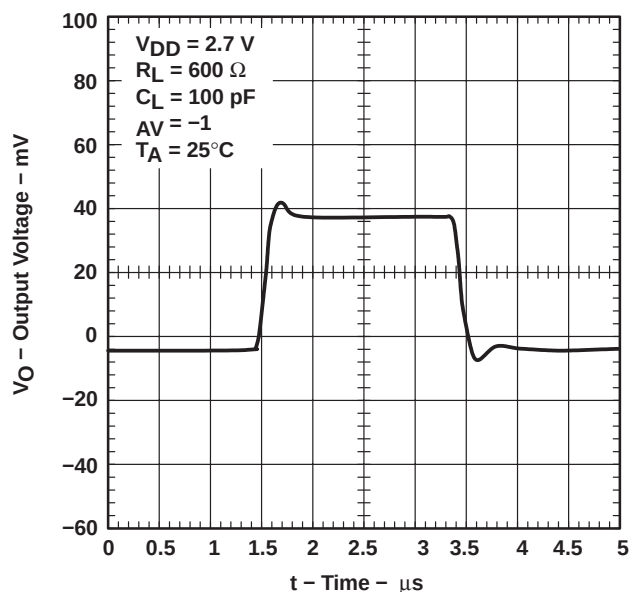


Figure 35

INVERTING SMALL-SIGNAL PULSE RESPONSE

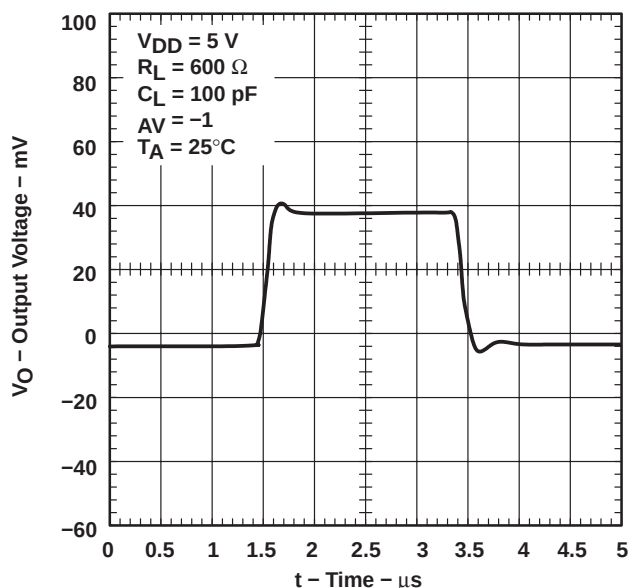


Figure 36

INVERTING LARGE-SIGNAL PULSE RESPONSE

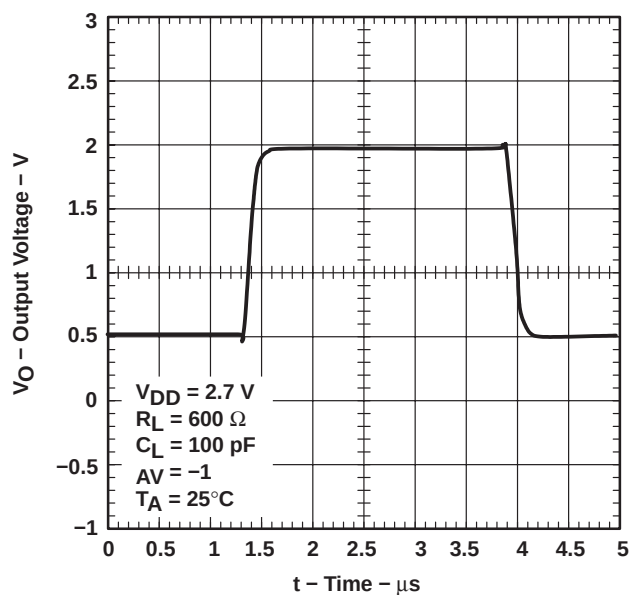


Figure 37

INVERTING LARGE-SIGNAL PULSE RESPONSE

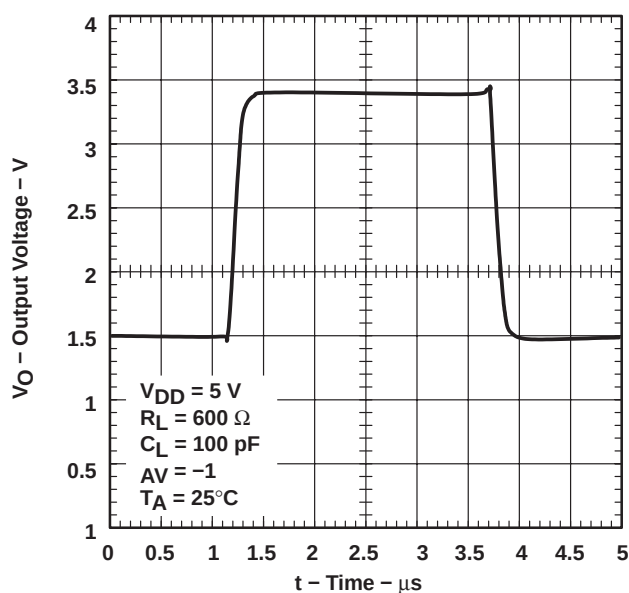


Figure 38

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

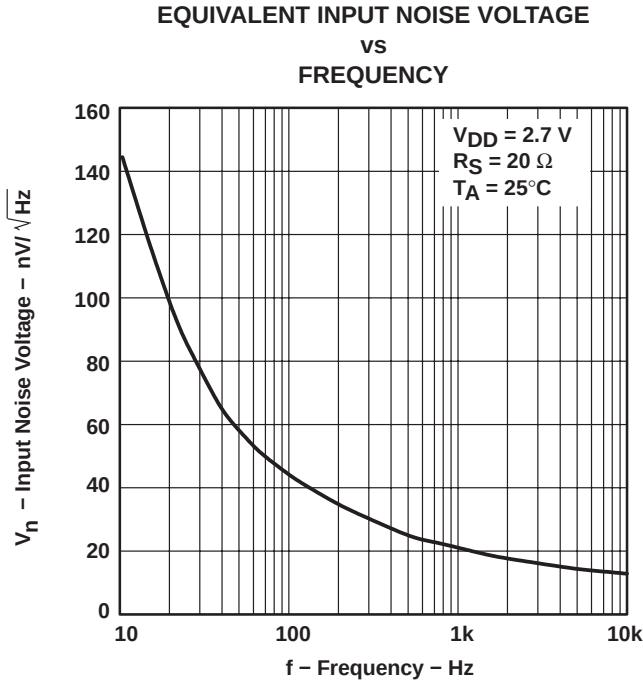


Figure 39

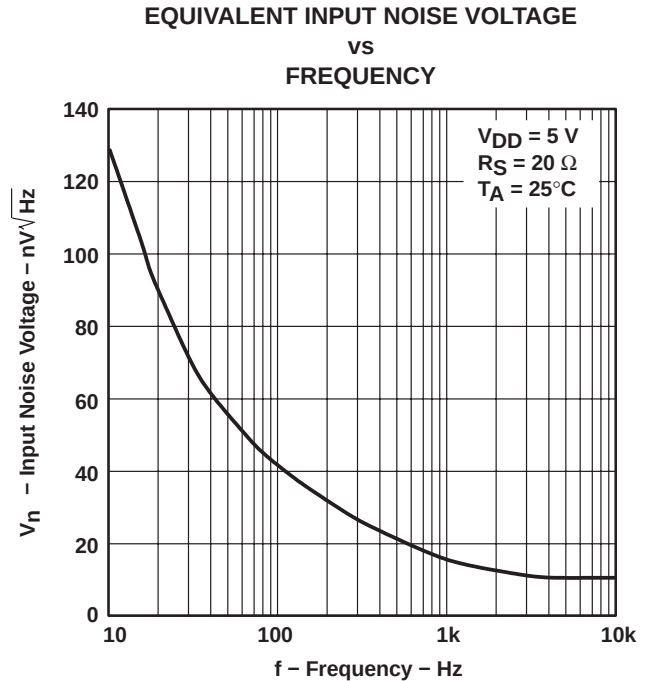


Figure 40

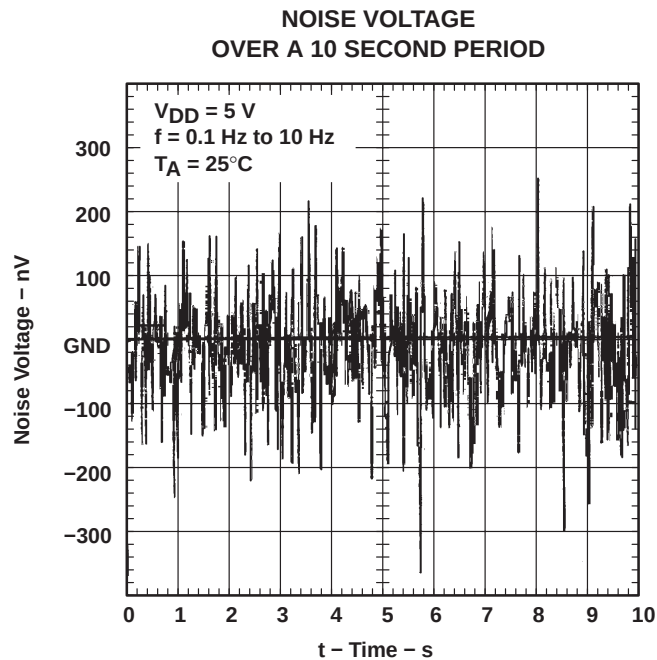


Figure 41

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

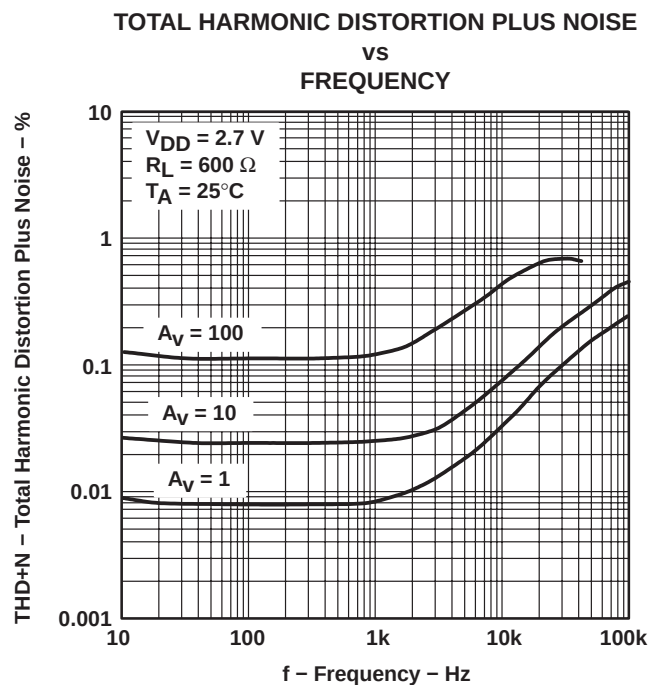


Figure 42

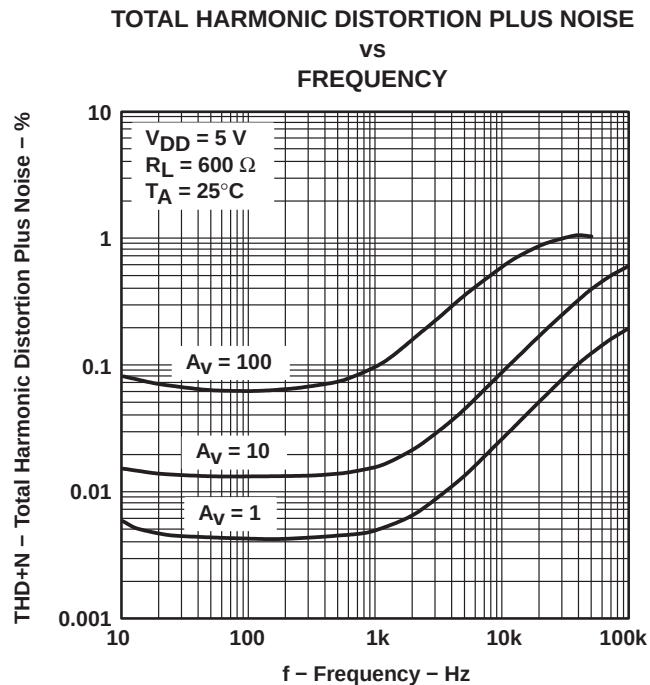


Figure 43

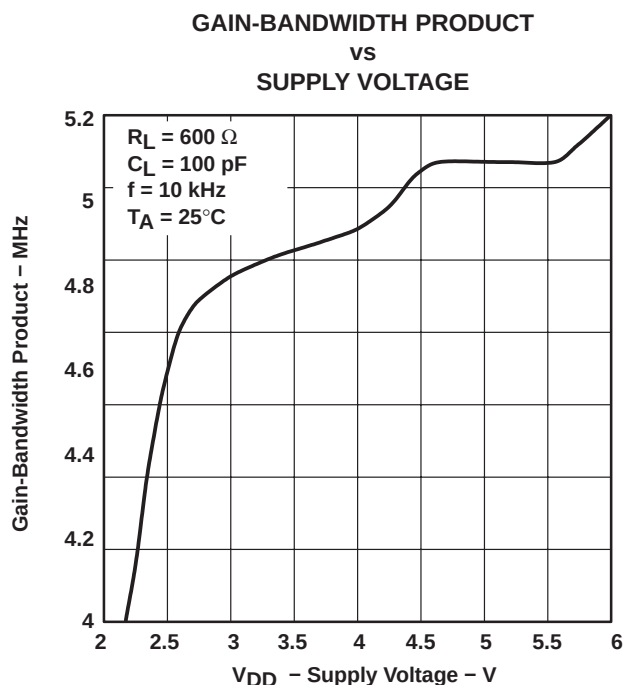


Figure 44

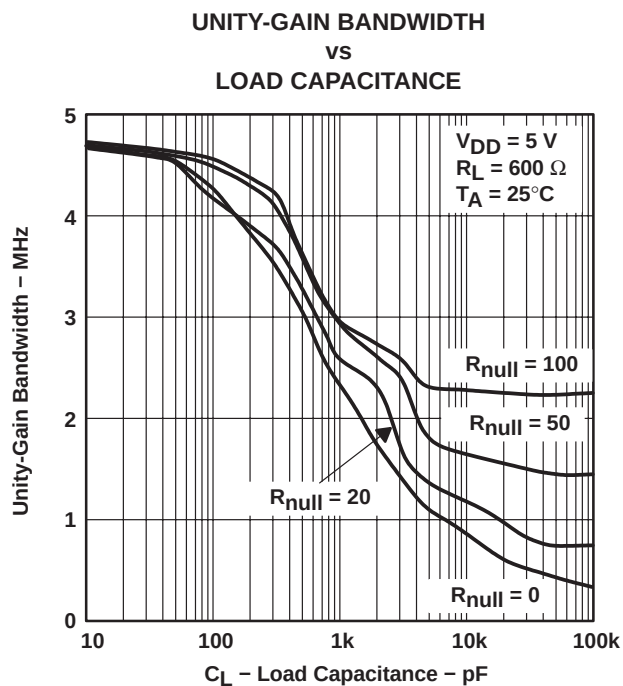


Figure 45

# TLV277x, TLV277xA FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

## TYPICAL CHARACTERISTICS

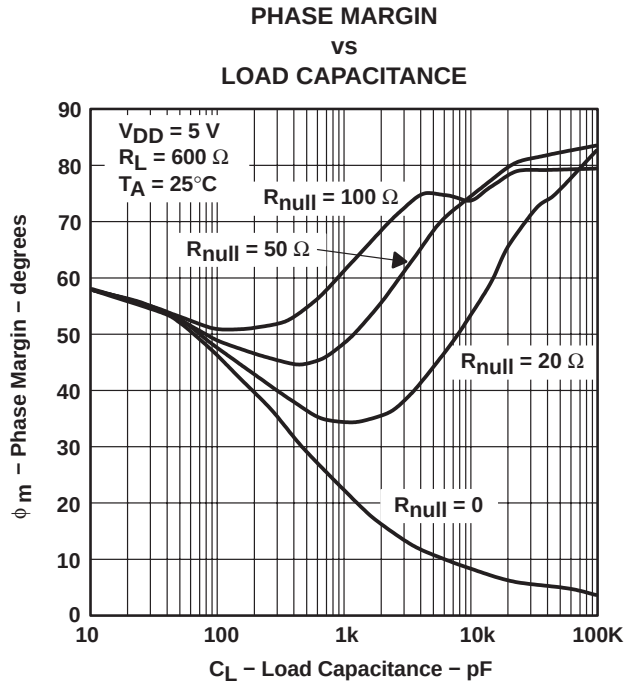


Figure 46

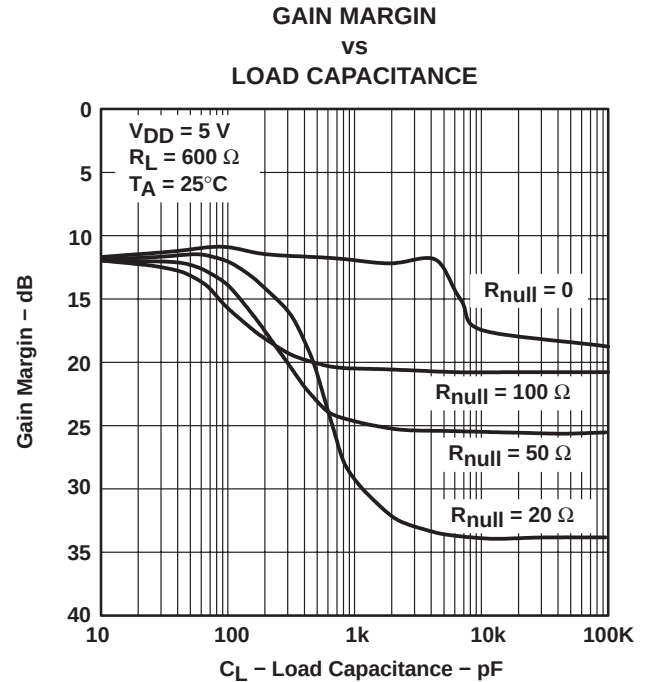


Figure 47

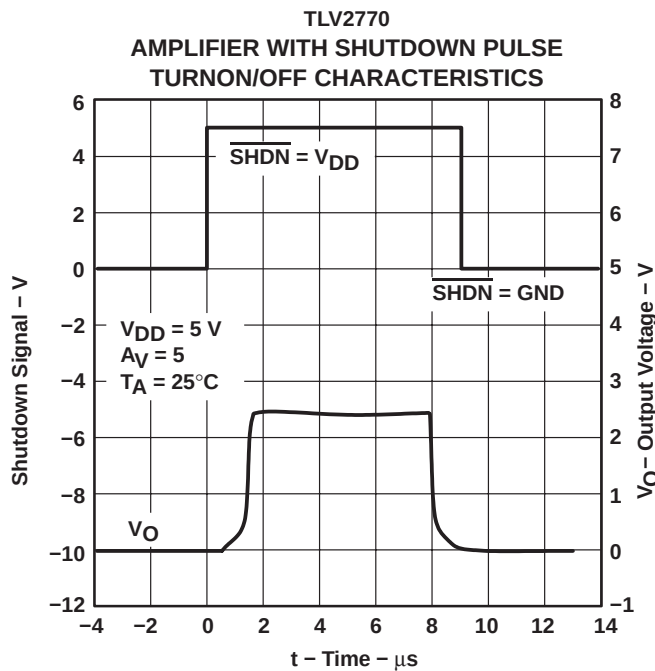


Figure 48

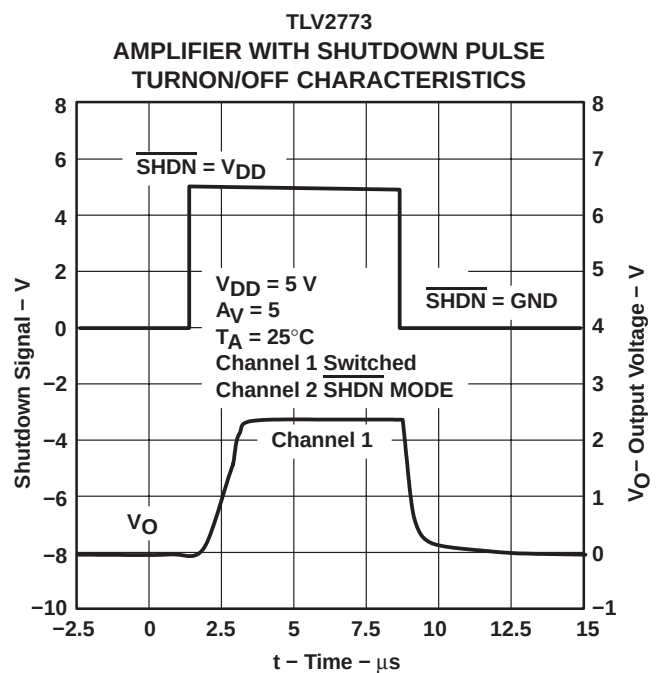


Figure 49

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### TYPICAL CHARACTERISTICS

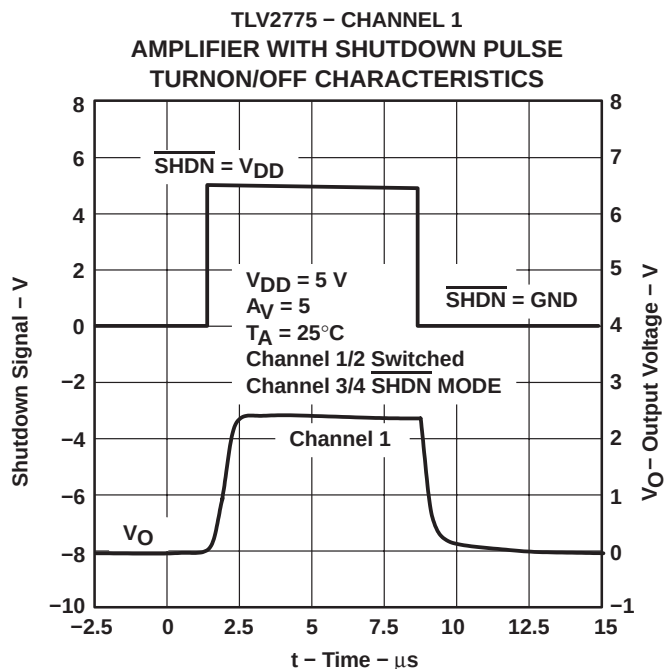


Figure 50

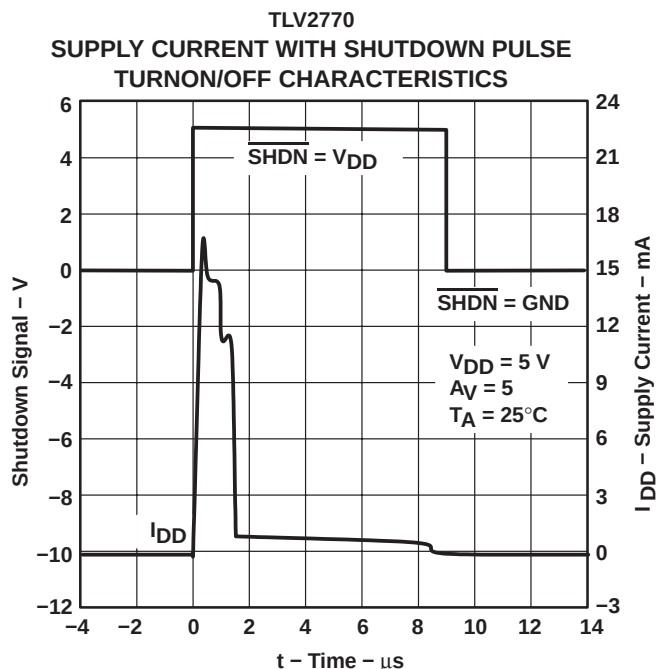


Figure 51

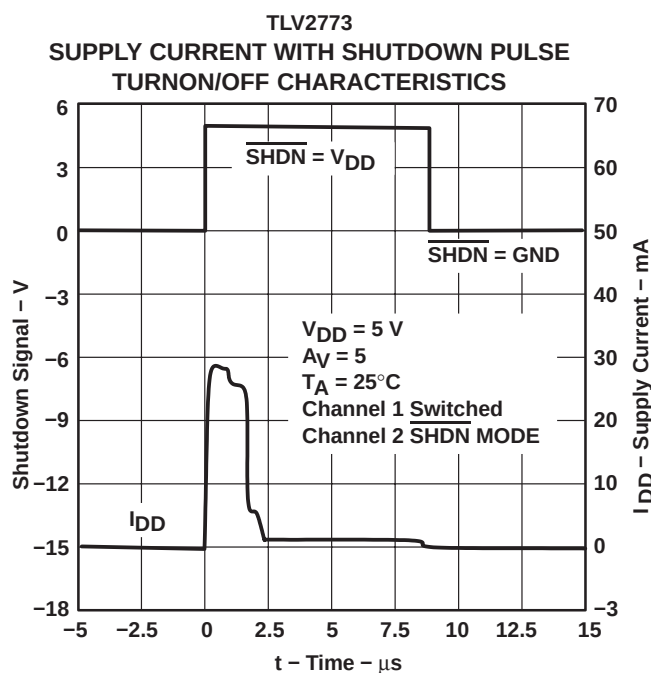


Figure 52

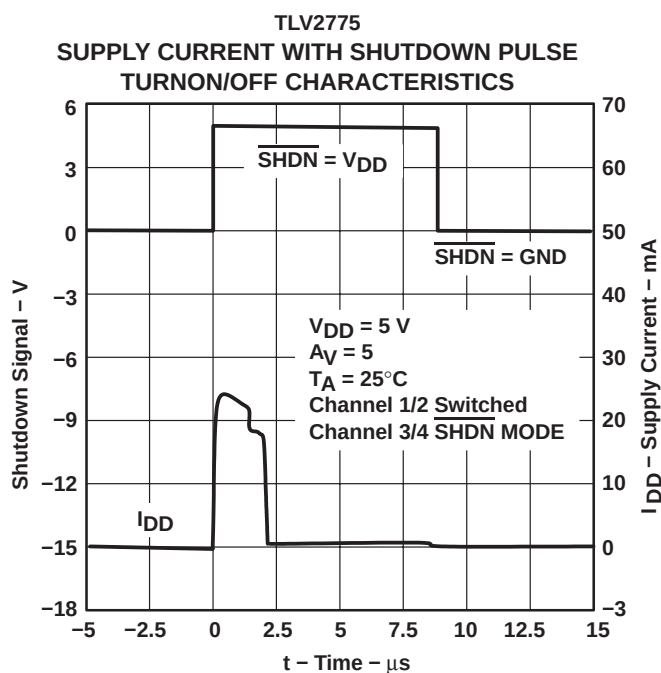


Figure 53



# TLV277x, TLV277xA FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

## TYPICAL CHARACTERISTICS

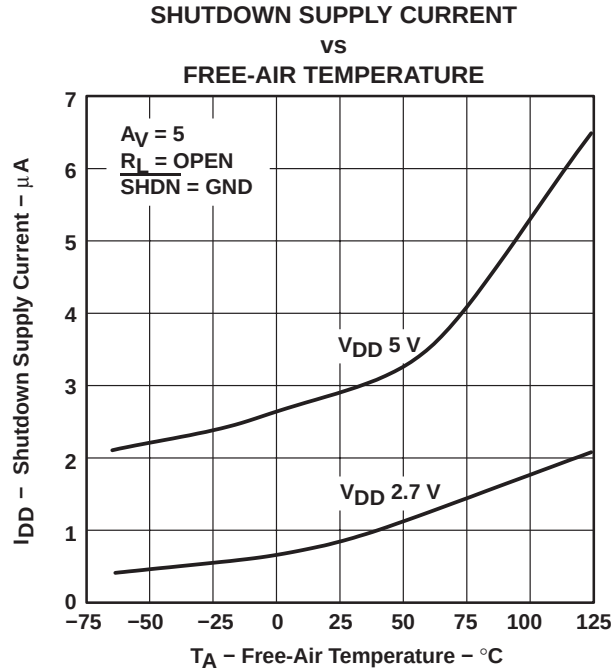


Figure 54

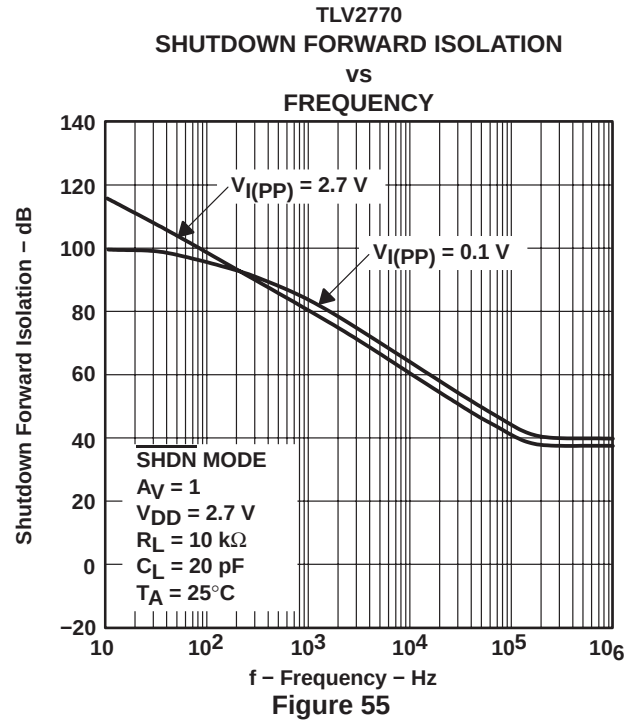


Figure 55

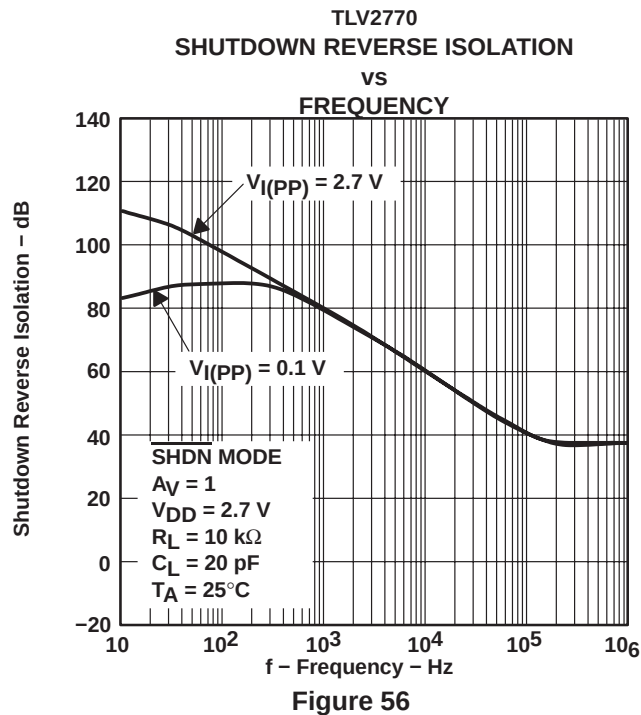


Figure 56

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### PARAMETER MEASUREMENT INFORMATION

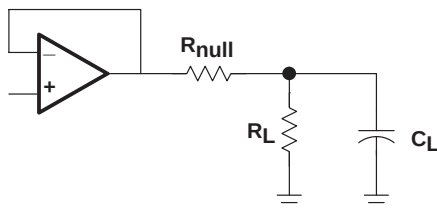


Figure 57

### driving a capacitive load

When the amplifier is configured in this manner, capacitive loading directly on the output will decrease the device's phase margin leading to high frequency ringing or oscillations. Therefore, for capacitive loads of greater than 10 pF, it is recommended that a resistor be placed in series ( $R_{NULL}$ ) with the output of the amplifier, as shown in Figure 58. A minimum value of 20  $\Omega$  should work well for most applications.

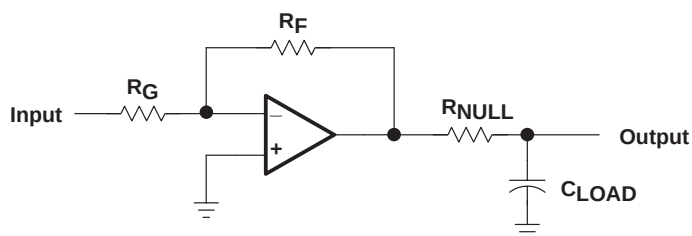


Figure 58. Driving a Capacitive Load

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### APPLICATION INFORMATION

#### offset voltage

The output offset voltage, ( $V_{OO}$ ) is the sum of the input offset voltage ( $V_{IO}$ ) and both input bias currents ( $I_{IB}$ ) times the corresponding gains. The following schematic and formula can be used to calculate the output offset voltage:

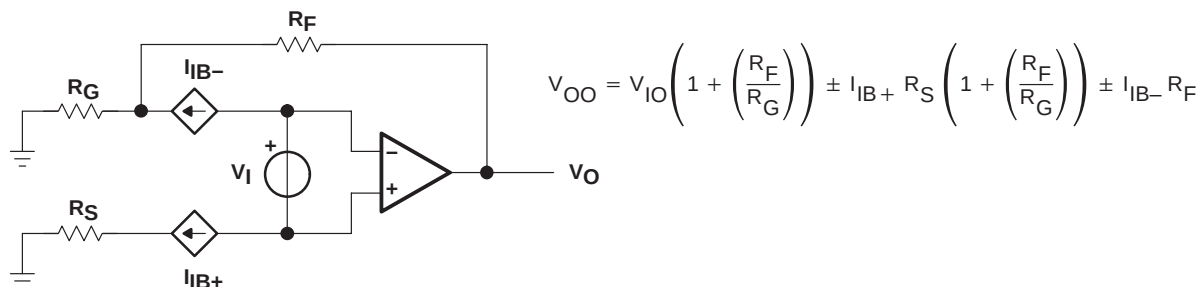


Figure 59. Output Offset Voltage Model

#### general configurations

When receiving low-level signals, limiting the bandwidth of the incoming signals into the system is often required. The simplest way to accomplish this is to place an RC filter at the noninverting terminal of the amplifier (see Figure 60).

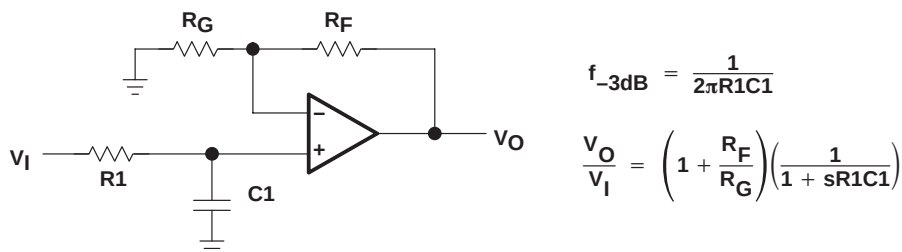


Figure 60. Single-Pole Low-Pass Filter

If even more attenuation is needed, a multiple pole filter is required. The Sallen-Key filter can be used for this task. For best results, the amplifier should have a bandwidth that is 8 to 10 times the filter frequency bandwidth. Failure to do this can result in phase shift of the amplifier.

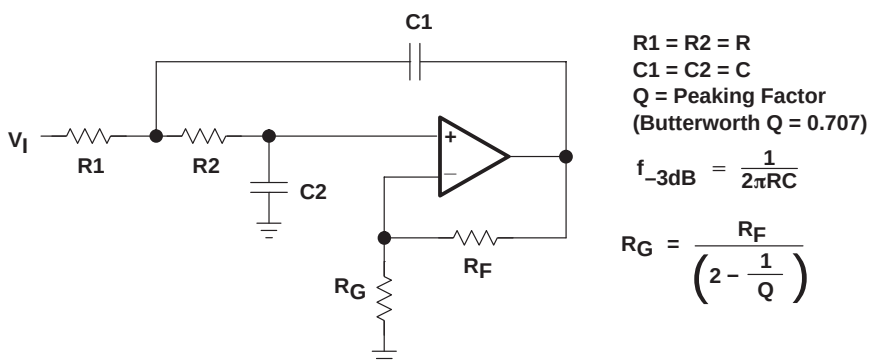


Figure 61. 2-Pole Low-Pass Sallen-Key Filter

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### APPLICATION INFORMATION

#### using the TLV2772 as an accelerometer interface

The schematic, shown in Figure 62, shows the ACH04-08-05 interfaced to the TLV1544 10-bit analog-to-digital converter (ADC).

The ACH04-08-05 is a shock sensor designed to convert mechanical acceleration into electrical signals. The sensor contains three piezoelectric sensing elements oriented to simultaneously measure acceleration in three orthogonal, linear axes (x, y, z). The operating frequency is 0.5 Hz to 5 kHz. The output is buffered with an internal JFET and has a typical output voltage of 1.80 mV/g for the x and y axis and 1.35 mV/g for the z axis.

Amplification and frequency shaping of the shock sensor output is done by the TLV2772 rail-to-rail operational amplifier. The TLV2772 is ideal for this application as it offers high input impedance, good slew rate, and excellent dc precision. The rail-to-rail output swing and high output drive are perfect for driving the analog input of the TLV1544 ADC.

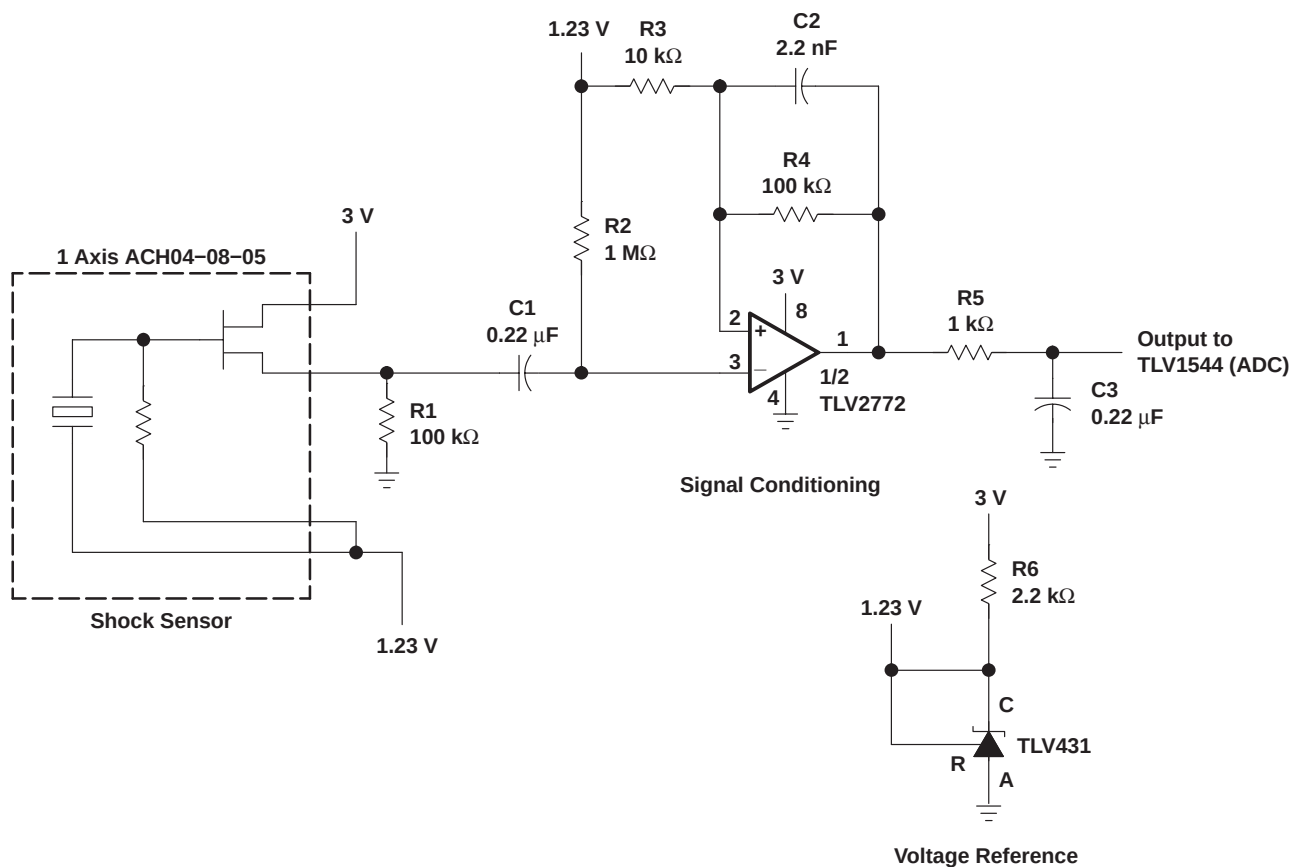


Figure 62. Accelerometer Interface Schematic

The sensor signal must be amplified and frequency-shaped to provide a signal the ADC can properly convert into the digital domain. Figure 62 shows the topology used in this application for one axis of the sensor. This system is powered from a single 3-V supply. Configuring the TLV431 with a 2.2-kΩ resistor produces a reference voltage of 1.23 V. This voltage is used to bias the operational amplifier and the internal JFETs in the shock sensor.

**TLV277x, TLV277xA**  
**FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT**  
**OPERATIONAL AMPLIFIERS WITH SHUTDOWN**

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

## APPLICATION INFORMATION

### gain calculation

Since the TLV2772 is capable of rail-to-rail output using a 3-V supply,  $V_O = 0$  (min) to 3 V (max). With no signal from the sensor, nominal  $V_O =$  reference voltage = 1.23 V. Therefore, the maximum negative swing from nominal is  $0\text{ V} - 1.23\text{ V} = -1.23\text{ V}$  and the maximum positive swing is  $3\text{ V} - 1.23\text{ V} = 1.77\text{ V}$ . By modeling the shock sensor as a low impedance voltage source with output of 2.25 mV/g (max) in the x and y axis and 1.70 mV/g (max) in the z axis, the gain of the circuit is calculated by equation 1.

$$\text{Gain} = \frac{\text{Output Swing}}{\text{Sensor Signal} \times \text{Acceleration}} \quad (1)$$

To avoid saturation of the operational amplifier, the gain calculations are based on the maximum negative swing of  $-1.23\text{ V}$  and the maximum sensor output of 2.25 mV/g (x and y axis) and 1.70 mV/g (z axis).

$$\text{Gain (x, y)} = \frac{-1.23\text{ V}}{2.25\text{ mV/g} \times -50\text{ g}} = 10.9 \quad (2)$$

and

$$\text{Gain (z)} = \frac{-1.23\text{ V}}{1.70\text{ mV/g} \times -50\text{ g}} = 14.5 \quad (3)$$

By selecting  $R_3 = 10\text{ k}\Omega$  and  $R_4 = 100\text{ k}\Omega$ , in the x and y channels, a gain of 11 is realized. By selecting  $R_3 = 7.5\text{ k}\Omega$  and  $R_4 = 100\text{ k}\Omega$ , in the z channel, a gain of 14.3 is realized. The schematic shows the configuration for either the x- or y-axis.

### bandwidth calculation

To calculate the component values for the frequency shaping characteristics of the signal conditioning circuit, 1 Hz and 500 Hz are selected as the minimum required 3-dB bandwidth.

To minimize the value of the input capacitor ( $C_1$ ) required to set the lower cutoff frequency requires a large value resistor for  $R_2$  is required. A 1-M $\Omega$  resistor is used in this example. To set the lower cutoff frequency, the required capacitor value for  $C_1$  is:

$$C_1 = \frac{1}{2\pi f_{\text{LOW}} R_2} = 0.159\text{ }\mu\text{F} \quad (4)$$

Using a value of 0.22  $\mu\text{F}$ , a more common value of capacitor, the lower cutoff frequency is 0.724 Hz.

To minimize the phase shift in the feedback loop caused by the input capacitance of the TLV2772, it is best to minimize the value of the feedback resistor  $R_4$ . However, to reduce the required capacitance in the feedback loop a large value for  $R_4$  is required. Therefore, a compromise for the value of  $R_4$  must be made. In this circuit, a value of 100 k $\Omega$  has been selected. To set the upper cutoff frequency, the required capacitor value for  $C_2$  is:

$$C_2 = \frac{1}{2\pi f_{\text{HIGH}} R_4} = 3.18\text{ }\mu\text{F} \quad (5)$$

Using a 2.2-nF capacitor, the upper cutoff frequency is 724 Hz.

$R_5$  and  $C_3$  also cause the signal response to roll off. Therefore, it is beneficial to design this roll-off point to begin at the upper cutoff frequency. Assuming a value of 1 k $\Omega$  for  $R_5$ , the value for  $C_3$  is calculated to be 0.22  $\mu\text{F}$ .

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

---

### APPLICATION INFORMATION

#### circuit layout considerations

To achieve the levels of high performance of the TLV277x, follow proper printed-circuit board design techniques. A general set of guidelines is given in the following.

- Ground planes—It is highly recommended that a ground plane be used on the board to provide all components with a low inductive ground connection. However, in the areas of the amplifier inputs and output, the ground plane can be removed to minimize the stray capacitance.
- Proper power supply decoupling—Use a 6.8- $\mu$ F tantalum capacitor in parallel with a 0.1- $\mu$ F ceramic capacitor on each supply terminal. It may be possible to share the tantalum among several amplifiers depending on the application, but a 0.1- $\mu$ F ceramic capacitor should always be used on the supply terminal of every amplifier. In addition, the 0.1- $\mu$ F capacitor should be placed as close as possible to the supply terminal. As this distance increases, the inductance in the connecting trace makes the capacitor less effective. The designer should strive for distances of less than 0.1 inches between the device power terminals and the ceramic capacitors.
- Sockets—Sockets can be used but are not recommended. The additional lead inductance in the socket pins will often lead to stability problems. Surface-mount packages soldered directly to the printed-circuit board is the best implementation.
- Short trace runs/compact part placements—Optimum high performance is achieved when stray series inductance has been minimized. To realize this, the circuit layout should be made as compact as possible, thereby minimizing the length of all trace runs. Particular attention should be paid to the inverting input of the amplifier. Its length should be kept as short as possible. This will help to minimize stray capacitance at the input of the amplifier.
- Surface-mount passive components—Using surface-mount passive components is recommended for high performance amplifier circuits for several reasons. First, because of the extremely low lead inductance of surface-mount components, the problem with stray series inductance is greatly reduced. Second, the small size of surface-mount components naturally leads to a more compact layout thereby minimizing both stray inductance and capacitance. If leaded components are used, it is recommended that the lead lengths be kept as short as possible.

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

### APPLICATION INFORMATION

#### general power dissipation considerations

For a given  $\theta_{JA}$ , the maximum power dissipation is shown in Figure 63 and is calculated by the following formula:

$$P_D = \left( \frac{T_{MAX} - T_A}{\theta_{JA}} \right)$$

Where:

$P_D$  = Maximum power dissipation of TLV277x IC (watts)


$T_{MAX}$  = Absolute maximum junction temperature (150°C)

$T_A$  = Free-ambient air temperature (°C)

$\theta_{JA} = \theta_{JC} + \theta_{CA}$

$\theta_{JC}$  = Thermal coefficient from junction to case

$\theta_{CA}$  = Thermal coefficient from case to ambient air (°C/W)

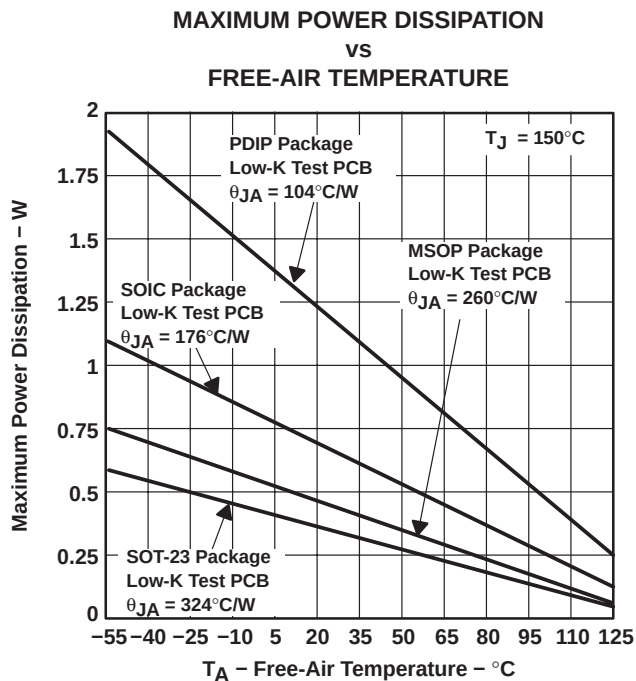

NOTE A: Results are with no air flow and using JEDEC Standard Low-K test PCB.

**Figure 63. Maximum Power Dissipation vs Free-Air Temperature**

# TLV277x, TLV277xA

## FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT

### OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004

---

#### APPLICATION INFORMATION

##### shutdown function

Three members of the TLV277x family (TLV2770/3/5) have a shutdown terminal for conserving battery life in portable applications. When the shutdown terminal is tied low, the supply current is reduced to  $0.8\ \mu\text{A}/\text{channel}$ , the amplifier is disabled, and the outputs are placed in a high impedance mode. To enable the amplifier, the shutdown terminal can either be left floating or pulled high. When the shutdown terminal is left floating, care needs to be taken to ensure that parasitic leakage current at the shutdown terminal does not inadvertently place the operational amplifier into shutdown. The shutdown terminal threshold is always referenced to  $V_{DD}/2$ . Therefore, when operating the device with split supply voltages (e.g.  $\pm 2.5\ \text{V}$ ), the shutdown terminal needs to be pulled to  $V_{DD-}$  (not GND) to disable the operational amplifier.

The amplifier's output with a shutdown pulse is shown in Figures 48, 49, and 50. The amplifier is powered with a single 5-V supply and configured as a noninverting configuration with a gain of 5. The amplifier turnon and turnoff times are measured from the 50% point of the shutdown pulse to the 50% point of the output waveform. The times for the single, dual, and quad are listed in the data tables. The *bump* on the rising edge of the TLV2770 output waveform is due to the start-up circuit on the bias generator. For the dual and quad (TLV2773/5), this *bump* is attributed to the bias generator's start-up circuit as well as the crosstalk between the other channel(s), which are in shutdown.

Figures 55 and 56 show the amplifier's forward and reverse isolation in shutdown. The operational amplifier is powered by  $\pm 1.35\text{-V}$  supplies and configured as a voltage follower ( $A_V = 1$ ). The isolation performance is plotted across frequency for both  $0.1\ \text{V}_{PP}$  and  $2.7\ \text{V}_{PP}$  input signals. During normal operation, the amplifier would not be able to handle a  $2.7\text{-V}_{PP}$  input signal with a supply voltage of  $\pm 1.35\ \text{V}$  since it exceeds the common-mode input voltage range ( $V_{ICR}$ ). However, this curve illustrates that the amplifier remains in shutdown even under a worst case scenario.



# TLV277x, TLV277xA FAMILY OF 2.7-V HIGH-SLEW-RATE RAIL-TO-RAIL OUTPUT OPERATIONAL AMPLIFIERS WITH SHUTDOWN

SLOS209G – JANUARY 1998 – REVISED FEBRUARY 2004


## APPLICATION INFORMATION

### macromodel information

Macromodel information provided was derived using Microsim *Parts*™ Release 8, the model generation software used with Microsim *PSpice*™. The Boyle macromodel (see Note 4) and subcircuit in Figure 64 are generated using the TLV2772 typical electrical and operating characteristics at  $T_A = 25^\circ\text{C}$ . Using this information, output simulations of the following key parameters can be generated to a tolerance of 20% (in most cases):

- Maximum positive output voltage swing
- Maximum negative output voltage swing
- Slew rate
- Quiescent power dissipation
- Input bias current
- Open-loop voltage amplification
- Unity-gain frequency
- Common-mode rejection ratio
- Phase margin
- DC output resistance
- AC output resistance
- Short-circuit output current limit

NOTE 4: G. R. Boyle, B. M. Cohn, D. O. Pederson, and J. E. Solomon, "Macromodeling of Integrated Circuit Operational Amplifiers", *IEEE Journal of Solid-State Circuits*, SC-9, 353 (1974).

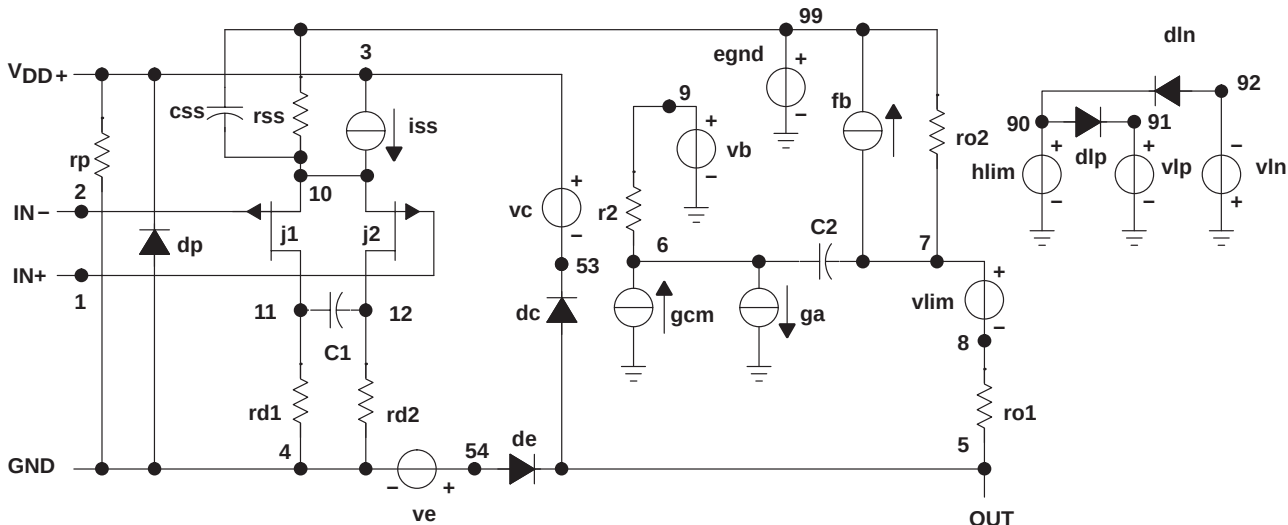

\* TLV2772 operational amplifier macromodel subcircuit  
\* created using Parts release 8.0 on 12/12/97 at 10:08  
\* Parts is a MicroSim product.

\* connections: noninverting input

\* | inverting input  
\* | positive power supply  
\* | negative power supply  
\* | output  
\* |

.subckt TLV2772

```

*      1 2 3 4 5
c1      11 12 2.8868E-12
c2      6 7 10.000E-12
css     10 99 2.6302E-12
dc      5 53 dy
de      54 5 dy
dlp     90 91 dx
dln     92 90 dx
dp      4 3 dx
egnd    99 0 poly(2) (3,0) (4,0) 0 .5 .5
fb      7 99 poly(5) vb vc ve vlp vln 0
          15.513E6 -1E3 1E3 16E6 -16E6
ga      6 0 11 12 188.50E-6
gcm     0 6 10 99 9.4472E-9

```

```

iss      3 10 dc 145.50E-6
hlim     90 0 vlim 1K
j1      11 2 10 jx1
j2      12 1 10 jx2
r2      6 9 100.00E3
rd1     4 11 5.3052E3
rd2     4 12 5.3052E3
ro1     8 5 17.140
ro2     7 99 17.140
rp      3 4 4.5455E3
rss     10 99 1.3746E6
vb      9 0 dc 0
vc      3 53 dc .82001
ve      54 4 dc .82001
vlim    7 8 dc 0
vlp     91 0 dc 47
vln     0 92 dc 47
.model  dx D(Is=800.00E-18)
.model  dy D(Is=800.00E-18 Rs=1m Cjo=10p)
.model  jx1 P(JF(Is=2.2500E-12 Beta=244.20E-6
+ Vto=-.99765)
.model  jx2 P(JF(Is=1.7500E-12 Beta=244.20E-6
+ Vto=-1.002350)
.ends

```

\*\$

Figure 64. Boyle Macromodel and Subcircuit

PSpice and Parts are trademarks of MicroSim Corporation.

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| 5962-9858801Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 5962-9858801QHA  | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| 5962-9858801QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| 5962-9858802Q2A  | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |
| 5962-9858802QHA  | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| 5962-9858802QPA  | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| TLV2770AID       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770AIDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770AIP       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2770AIPe4     | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2770CD        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770CDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770CDGKG4    | ACTIVE                | MSOP         | DGK             | 8    |             | TBD                     | Call TI          | Call TI                      |
| TLV2770CDGKRG4   | ACTIVE                | MSOP         | DGK             | 8    |             | TBD                     | Call TI          | Call TI                      |
| TLV2770CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770CDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770CP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2770CPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2770ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770IDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770IDGKR     | ACTIVE                | MSOP         | DGK             | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770IDGKRG4   | ACTIVE                | MSOP         | DGK             | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770IDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2770IP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2770IPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2771AIDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771AIDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLV2771CD        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771CDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDBVR     | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDBVRG4   | ACTIVE                | SOT-23       | DBV             | 5    | 3000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDBVT     | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDBVTG4   | ACTIVE                | SOT-23       | DBV             | 5    | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2771IDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AID       | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AIDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AIDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AIDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AIP       | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2772AIPe4     | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2772AMD       | ACTIVE                | SOIC         | D               | 8    | 75          | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM           |
| TLV2772AMDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AMDR      | ACTIVE                | SOIC         | D               | 8    | 2500        | TBD                     | Call TI          | Call TI                      |
| TLV2772AMDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2772AMFKB     | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup>               |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|--------------------------------------------|
| TLV2772AMJGB     | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type                         |
| TLV2772AMUB      | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type                         |
| TLV2772AQD       | NRND                  | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-250C-1 YEAR/<br>Level-1-235C-UNLIM |
| TLV2772AQDG4     | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772AQDR      | NRND                  | SOIC         | D               | 8    | 2500        | TBD                     | Call TI          | Call TI                                    |
| TLV2772AQDRG4    | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772AQPW      | ACTIVE                | TSSOP        | PW              | 8    | 150         | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM                         |
| TLV2772AQPWG4    | ACTIVE                | TSSOP        | PW              | 8    | 150         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772AQPWR     | ACTIVE                | TSSOP        | PW              | 8    | 2000        | TBD                     | Call TI          | Call TI                                    |
| TLV2772AQPWRG4   | ACTIVE                | TSSOP        | PW              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CD        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDGK      | ACTIVE                | MSOP         | DGK             | 8    | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDGKG4    | ACTIVE                | MSOP         | DGK             | 8    | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDGKR     | ACTIVE                | MSOP         | DGK             | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDGKR4    | ACTIVE                | MSOP         | DGK             | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772CP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type                         |
| TLV2772CPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type                         |
| TLV2772ID        | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDGK      | ACTIVE                | MSOP         | DGK             | 8    | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDGKG4    | ACTIVE                | MSOP         | DGK             | 8    | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDGKR     | ACTIVE                | MSOP         | DGK             | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDGKR4    | ACTIVE                | MSOP         | DGK             | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772IDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup>               |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|--------------------------------------------|
| TLV2772IP        | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type                         |
| TLV2772IPE4      | ACTIVE                | PDIP         | P               | 8    | 50          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type                         |
| TLV2772MD        | ACTIVE                | SOIC         | D               | 8    | 75          | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM                         |
| TLV2772MDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772MDR       | ACTIVE                | SOIC         | D               | 8    | 2500        | TBD                     | Call TI          | Call TI                                    |
| TLV2772MDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772MFKB      | ACTIVE                | LCCC         | FK              | 20   | 1           | TBD                     | POST-PLATE       | N / A for Pkg Type                         |
| TLV2772MJGB      | ACTIVE                | CDIP         | JG              | 8    | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type                         |
| TLV2772MUB       | ACTIVE                | CFP          | U               | 10   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type                         |
| TLV2772QD        | NRND                  | SOIC         | D               | 8    | 75          | Pb-Free (RoHS)          | CU NIPDAU        | Level-2-250C-1 YEAR/<br>Level-1-235C-UNLIM |
| TLV2772QDG4      | ACTIVE                | SOIC         | D               | 8    | 75          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772QDR       | NRND                  | SOIC         | D               | 8    | 1500        | TBD                     | Call TI          | Call TI                                    |
| TLV2772QDRG4     | ACTIVE                | SOIC         | D               | 8    | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772QPW       | ACTIVE                | TSSOP        | PW              | 8    | 150         | TBD                     | CU NIPDAU        | Level-1-220C-UNLIM                         |
| TLV2772QPWG4     | ACTIVE                | TSSOP        | PW              | 8    | 150         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2772QPWR      | ACTIVE                | TSSOP        | PW              | 8    | 2000        | TBD                     | Call TI          | Call TI                                    |
| TLV2772QPWRG4    | ACTIVE                | TSSOP        | PW              | 8    | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773AIN       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type                         |
| TLV2773AINE4     | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type                         |
| TLV2773CD        | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDG4      | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDGS      | ACTIVE                | MSOP         | DGS             | 10   | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDGSG4    | ACTIVE                | MSOP         | DGS             | 10   | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDGSR     | ACTIVE                | MSOP         | DGS             | 10   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDGSRG4   | ACTIVE                | MSOP         | DGS             | 10   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773CDRG4     | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773IDGS      | ACTIVE                | MSOP         | DGS             | 10   | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |
| TLV2773IDGSG4    | ACTIVE                | MSOP         | DGS             | 10   | 80          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM                         |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLV2773IDGSR     | ACTIVE                | MSOP         | DGS             | 10   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2773IDGSRG4   | ACTIVE                | MSOP         | DGS             | 10   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2773IDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2773IDRG4     | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2773IN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2773INE4      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774AID       | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774AIDG4     | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774AIDR      | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLV2774AIDRG4    | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLV2774AIN       | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774AINE4     | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774AIPW      | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774AIPWG4    | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CD        | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CDG4      | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CDRG4     | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774CNE4      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774CPW       | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CPWG4     | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CPWR      | ACTIVE                | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774CPWRG4    | ACTIVE                | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774ID        | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLV2774IDG4      | ACTIVE                | SOIC         | D               | 14   | 50          | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLV2774IDR       | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLV2774IDRG4     | ACTIVE                | SOIC         | D               | 14   | 2500        | Green (RoHS & no Sb/Br) | Call TI          | Level-1-260C-UNLIM           |
| TLV2774IN        | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774INE4      | ACTIVE                | PDIP         | N               | 14   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2774IPW       | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774IPWG4     | ACTIVE                | TSSOP        | PW              | 14   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774IPWR      | ACTIVE                | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2774IPWRG4    | ACTIVE                | TSSOP        | PW              | 14   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775AIDR      | ACTIVE                | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775AIDRG4    | ACTIVE                | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775AIN       | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2775AINE4     | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2775AIPW      | ACTIVE                | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775AIPWG4    | ACTIVE                | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775AIPWR     | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775AIPWRG4   | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775CD        | ACTIVE                | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775CDG4      | ACTIVE                | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775CN        | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2775CNE4      | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2775ID        | ACTIVE                | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IDG4      | ACTIVE                | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IDR       | ACTIVE                | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IDRG4     | ACTIVE                | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IN        | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| TLV2775INE4      | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |



| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| TLV2775IPW       | ACTIVE                | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IPWG4     | ACTIVE                | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IPWR      | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| TLV2775IPWRG4    | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.



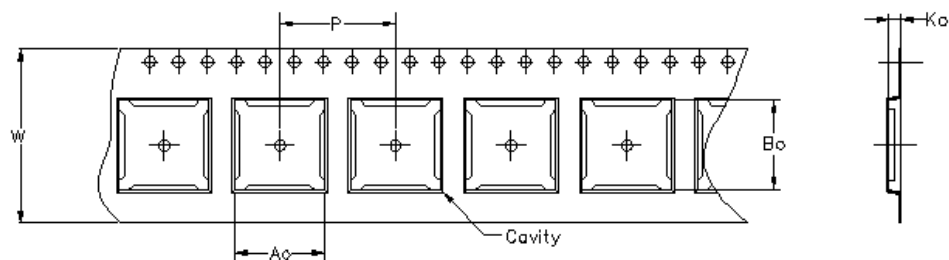


Carrier tape design is defined largely by the component length, width, and thickness.

|                                                                    |
|--------------------------------------------------------------------|
| $A_o$ = Dimension designed to accommodate the component width.     |
| $B_o$ = Dimension designed to accommodate the component length.    |
| $K_o$ = Dimension designed to accommodate the component thickness. |
| $W$ = Overall width of the carrier tape.                           |
| $P$ = Pitch between successive cavity centers.                     |

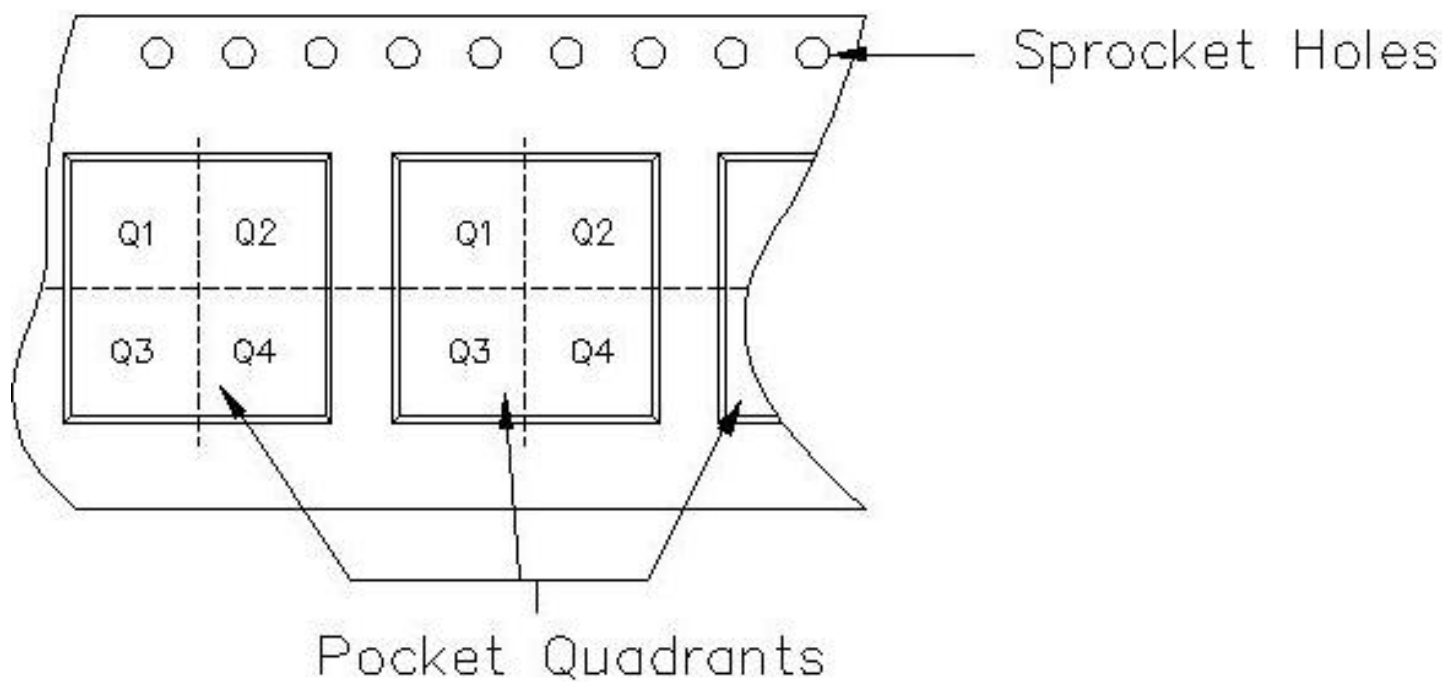


## TAPE AND REEL INFORMATION

| Device        | Package | Pins | Site | Reel<br>Diameter<br>(mm) | Reel<br>Width<br>(mm) | A0 (mm) | B0 (mm) | K0 (mm) | P1<br>(mm) | W<br>(mm) | Pin1<br>Quadrant |
|---------------|---------|------|------|--------------------------|-----------------------|---------|---------|---------|------------|-----------|------------------|
| TLV2770CDR    | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2770IDGKR  | DGK     | 8    | HNT  | 330                      | 12                    | 5.3     | 3.4     | 1.4     | 8          | 12        | NONE             |
| TLV2770IDR    | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2771AIDR   | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2771CDBVR  | DBV     | 5    | LEN  | 180                      | 9                     | 3.15    | 3.2     | 1.4     | 4          | 8         | NONE             |
| TLV2771CDBVT  | DBV     | 5    | LEN  | 180                      | 9                     | 3.15    | 3.2     | 1.4     | 4          | 8         | NONE             |
| TLV2771CDR    | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2771IDBVR  | DBV     | 5    | LEN  | 180                      | 9                     | 3.15    | 3.2     | 1.4     | 4          | 8         | NONE             |
| TLV2771IDBVT  | DBV     | 5    | LEN  | 180                      | 9                     | 3.15    | 3.2     | 1.4     | 4          | 8         | NONE             |
| TLV2771IDR    | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2772AIDR   | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2772CDGKR  | DGK     | 8    | HNT  | 330                      | 12                    | 5.3     | 3.4     | 1.4     | 8          | 12        | NONE             |
| TLV2772CDR    | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2772CDR    | D       | 8    | FMX  | 330                      | 0                     | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2772IDGKR  | DGK     | 8    | HNT  | 330                      | 12                    | 5.3     | 3.4     | 1.4     | 8          | 12        | NONE             |
| TLV2772IDR    | D       | 8    | TAI  | 330                      | 12                    | 6.4     | 5.2     | 2.1     | 8          | 12        | Q1               |
| TLV2773CDGSR  | DGS     | 10   | HNT  | 330                      | 12                    | 5.3     | 3.4     | 1.4     | 8          | 12        | NONE             |
| TLV2773CDR    | D       | 14   | TAI  | 330                      | 16                    | 6.5     | 9.0     | 2.1     | 8          | 16        | Q1               |
| TLV2773IDGSR  | DGS     | 10   | HNT  | 330                      | 12                    | 5.3     | 3.4     | 1.4     | 8          | 12        | NONE             |
| TLV2773IDR    | D       | 14   | TAI  | 330                      | 16                    | 6.5     | 9.0     | 2.1     | 8          | 16        | Q1               |
| TLV2774CDR    | D       | 14   | TAI  | 330                      | 16                    | 6.5     | 9.0     | 2.1     | 8          | 16        | Q1               |
| TLV2774IDR    | D       | 14   | TAI  | 330                      | 16                    | 6.5     | 9.0     | 2.1     | 8          | 16        | Q1               |
| TLV2774IDR    | D       | 14   | FMX  | 330                      | 0                     | 6.5     | 9.0     | 2.1     | 8          | 16        | Q1               |
| TLV2775IDR    | D       | 16   | TAI  | 330                      | 16                    | 6.5     | 10.3    | 2.1     | 8          | 16        | Q1               |
| TLV2775IPWR   | PW      | 16   | MLA  | 330                      | 12                    | 7.0     | 5.6     | 1.6     | 8          | 12        | Q1               |
| TLV2775IPWRG4 | PW      | 16   | MLA  | 330                      | 12                    | 7.0     | 5.6     | 1.6     | 8          | 12        | Q1               |

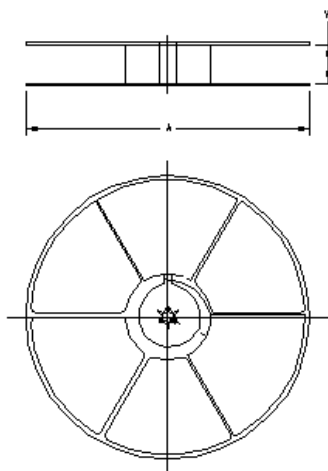

## TAPE AND REEL BOX INFORMATION

| Device        | Package | Pins | Site | Length (mm) | Width (mm) | Height (mm) |
|---------------|---------|------|------|-------------|------------|-------------|
| TLV2770CDR    | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2770IDGKR  | DGK     | 8    | HNT  | 358.0       | 335.0      | 35.0        |
| TLV2770IDR    | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2771AIDR   | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2771CDBVR  | DBV     | 5    | LEN  | 182.0       | 182.0      | 20.0        |
| TLV2771CDBVT  | DBV     | 5    | LEN  | 182.0       | 182.0      | 20.0        |
| TLV2771CDR    | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2771IDBVR  | DBV     | 5    | LEN  | 182.0       | 182.0      | 20.0        |
| TLV2771IDBVT  | DBV     | 5    | LEN  | 182.0       | 182.0      | 20.0        |
| TLV2771IDR    | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2772AIDR   | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2772CDGKR  | DGK     | 8    | HNT  | 358.0       | 335.0      | 35.0        |
| TLV2772CDR    | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2772CDR    | D       | 8    | FMX  | 342.9       | 336.6      | 20.64       |
| TLV2772IDGKR  | DGK     | 8    | HNT  | 358.0       | 335.0      | 35.0        |
| TLV2772IDR    | D       | 8    | TAI  | 346.0       | 346.0      | 29.0        |
| TLV2773CDGSR  | DGS     | 10   | HNT  | 358.0       | 335.0      | 35.0        |
| TLV2773CDR    | D       | 14   | TAI  | 346.0       | 346.0      | 33.0        |
| TLV2773IDGSR  | DGS     | 10   | HNT  | 358.0       | 335.0      | 35.0        |
| TLV2773IDR    | D       | 14   | TAI  | 346.0       | 346.0      | 33.0        |
| TLV2774CDR    | D       | 14   | TAI  | 346.0       | 346.0      | 33.0        |
| TLV2774IDR    | D       | 14   | TAI  | 346.0       | 346.0      | 33.0        |
| TLV2774IDR    | D       | 14   | FMX  | 342.9       | 336.6      | 28.58       |
| TLV2775IDR    | D       | 16   | TAI  | 346.0       | 346.0      | 33.0        |
| TLV2775IPWR   | PW      | 16   | MLA  | 552.0       | 346.0      | 36.0        |
| TLV2775IPWRG4 | PW      | 16   | MLA  | 552.0       | 346.0      | 36.0        |

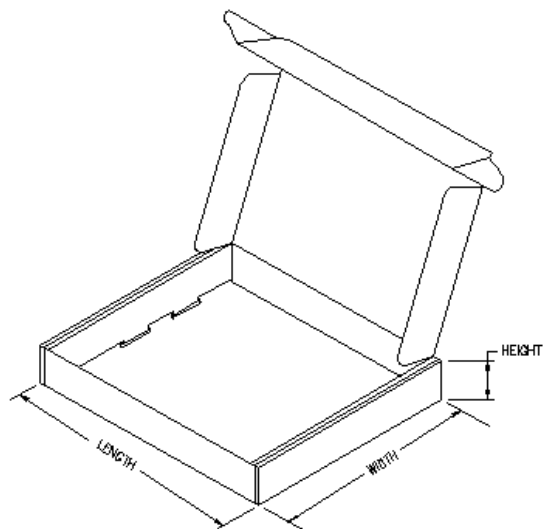


# MECHANICAL DATA

MCER001A – JANUARY 1995 – REVISED JANUARY 1997

JG (R-GDIP-T8)

CERAMIC DUAL-IN-LINE

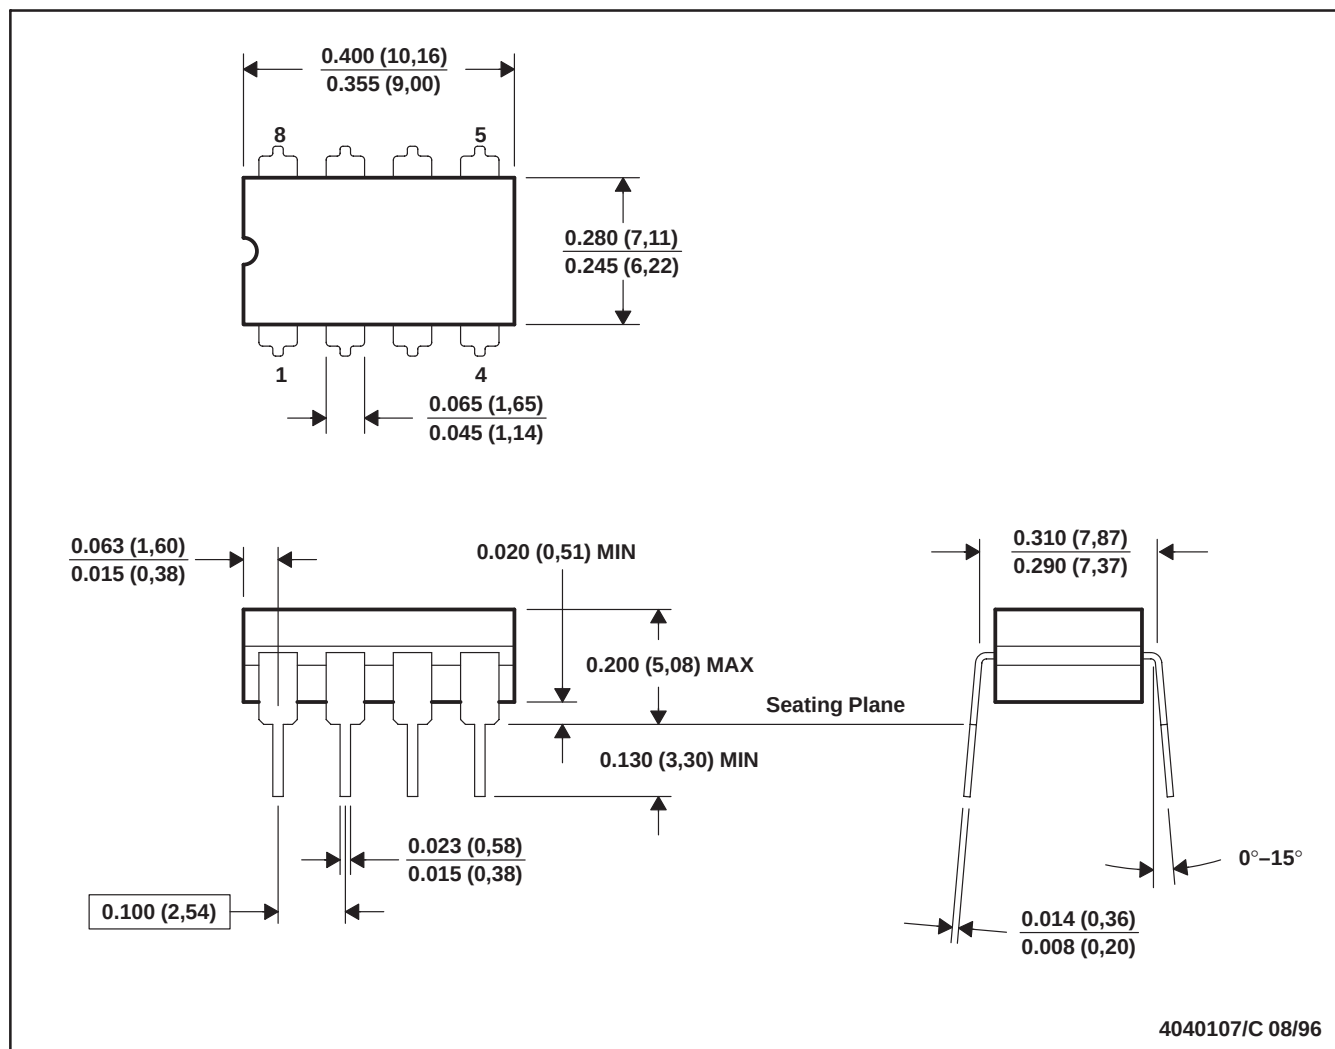


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification.
  - E. Falls within MIL STD 1835 GDIP1-T8

## MECHANICAL DATA

U (S-GDFP-F10)

CERAMIC DUAL FLATPACK

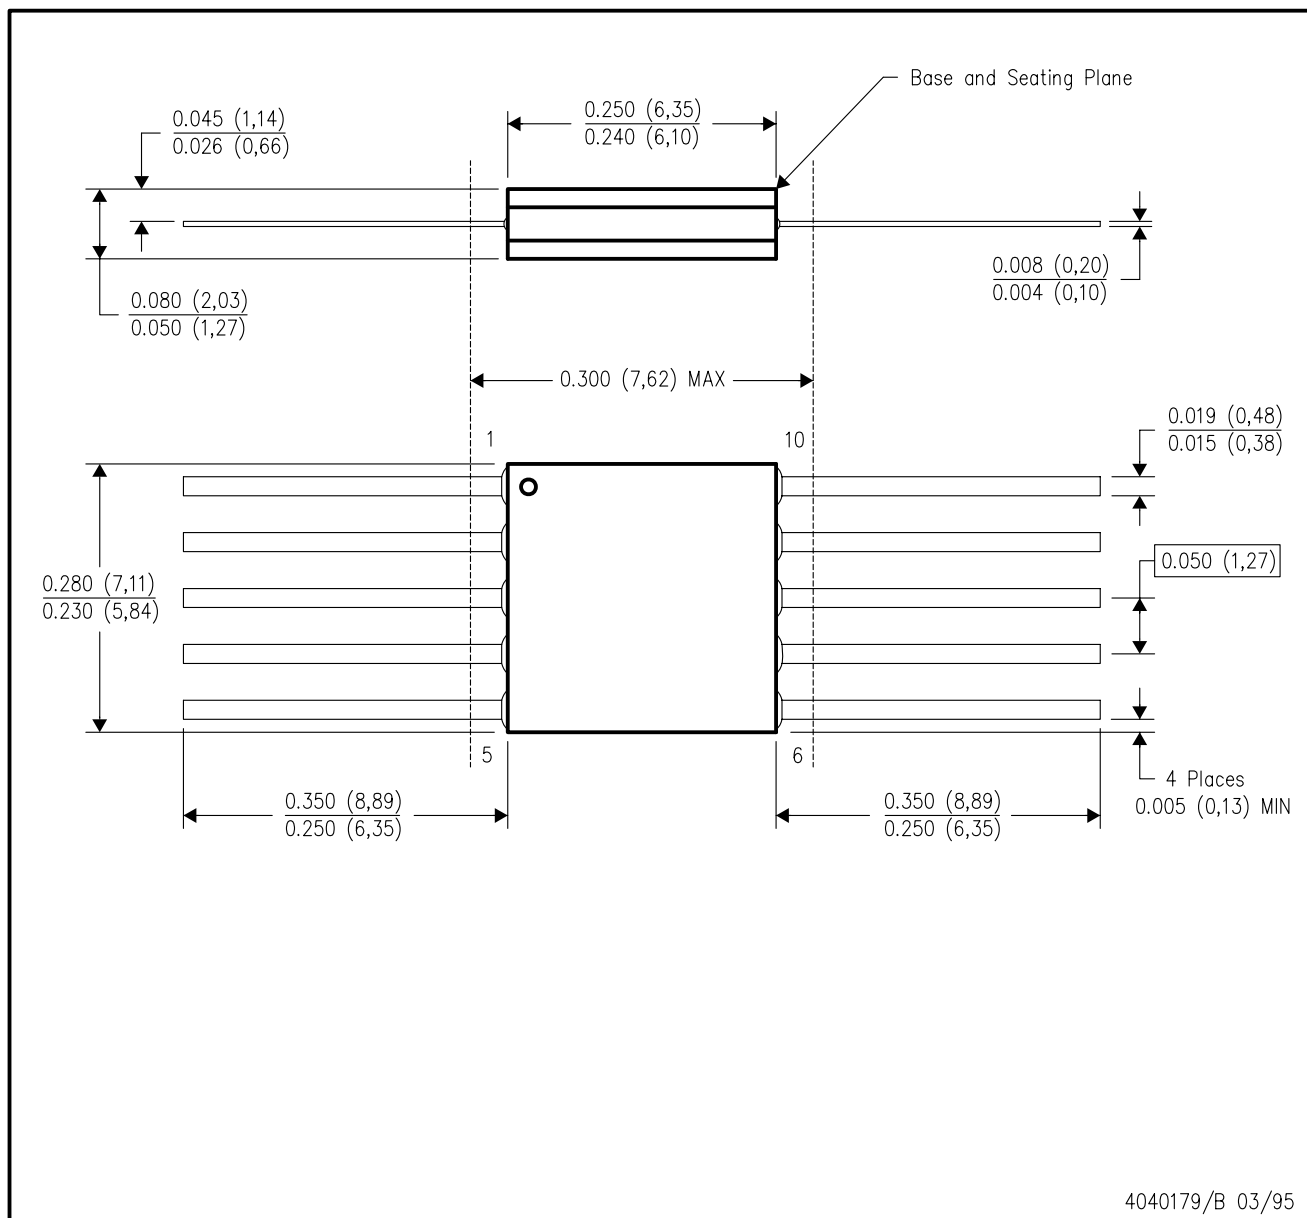

- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - This package can be hermetically sealed with a ceramic lid using glass frit.
  - Index point is provided on cap for terminal identification only.
  - Falls within MIL STD 1835 GDFP1-F10 and JEDEC MO-092AA


# MECHANICAL DATA

MLCC006B – OCTOBER 1996

FK (S-CQCC-N\*\*)

LEADLESS CERAMIC CHIP CARRIER

28 TERMINAL SHOWN

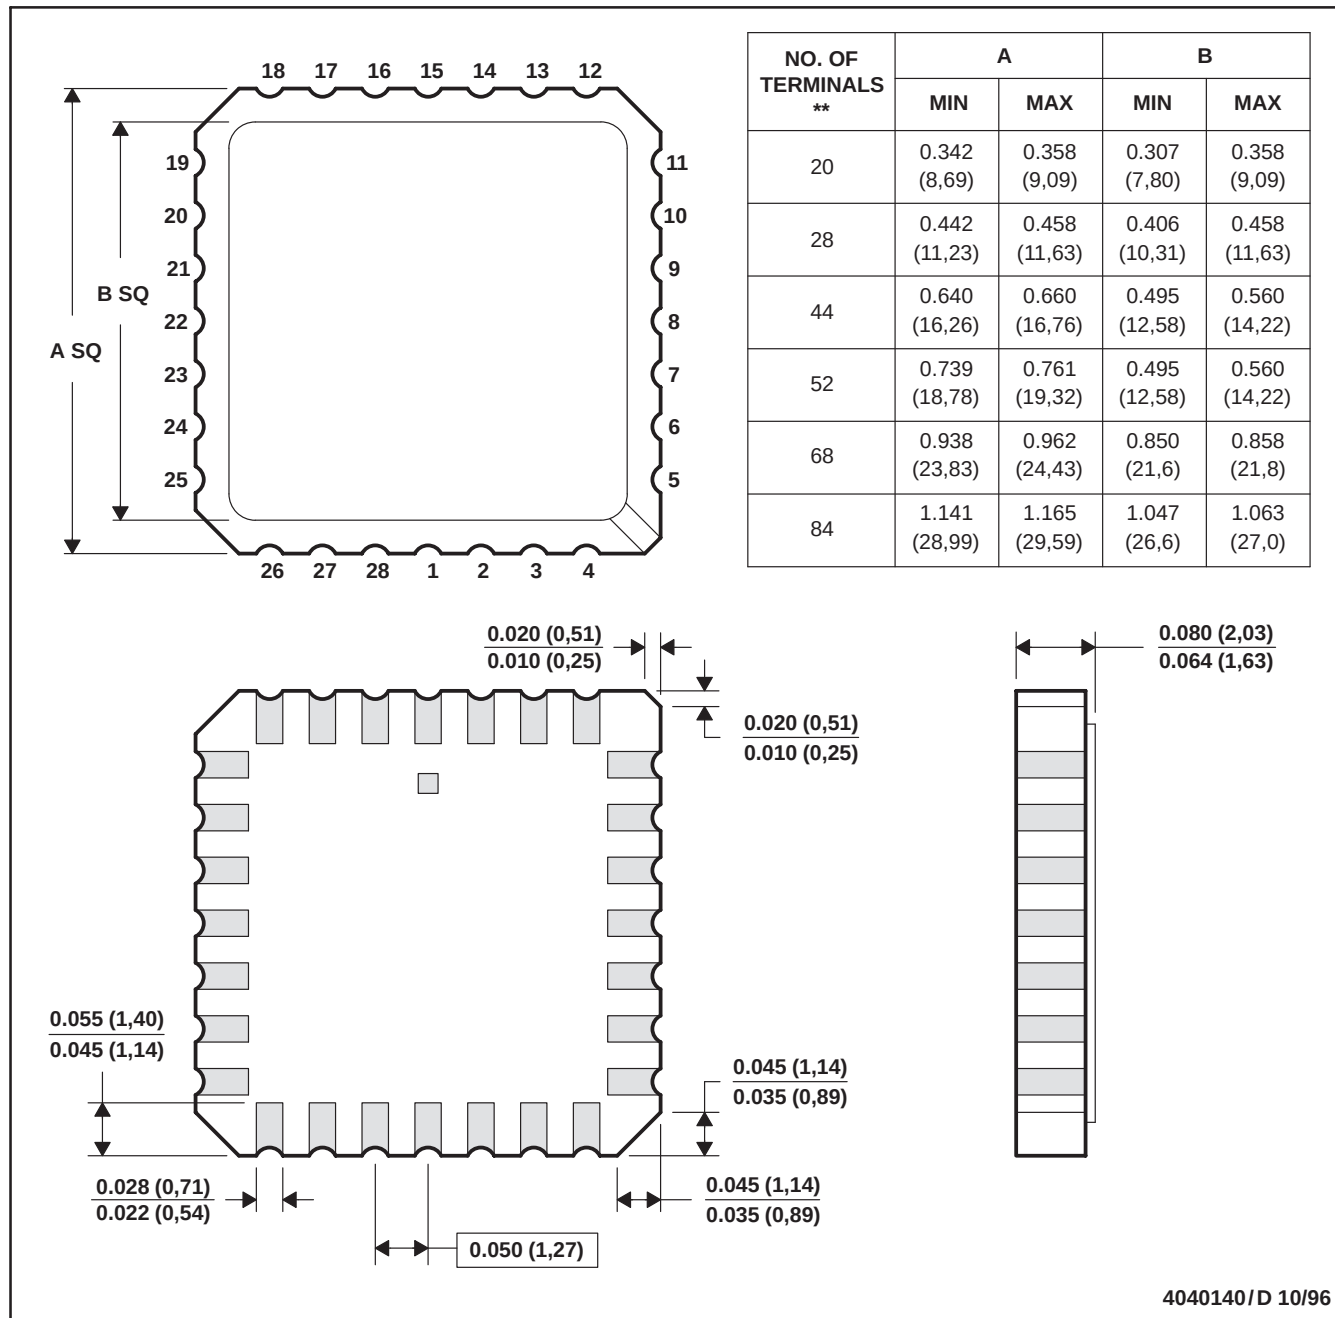


- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package can be hermetically sealed with a metal lid.
  - D. The terminals are gold plated.
  - E. Falls within JEDEC MS-004

# MECHANICAL DATA

MPDI001A – JANUARY 1995 – REVISED JUNE 1999

P (R-PDIP-T8)

PLASTIC DUAL-IN-LINE

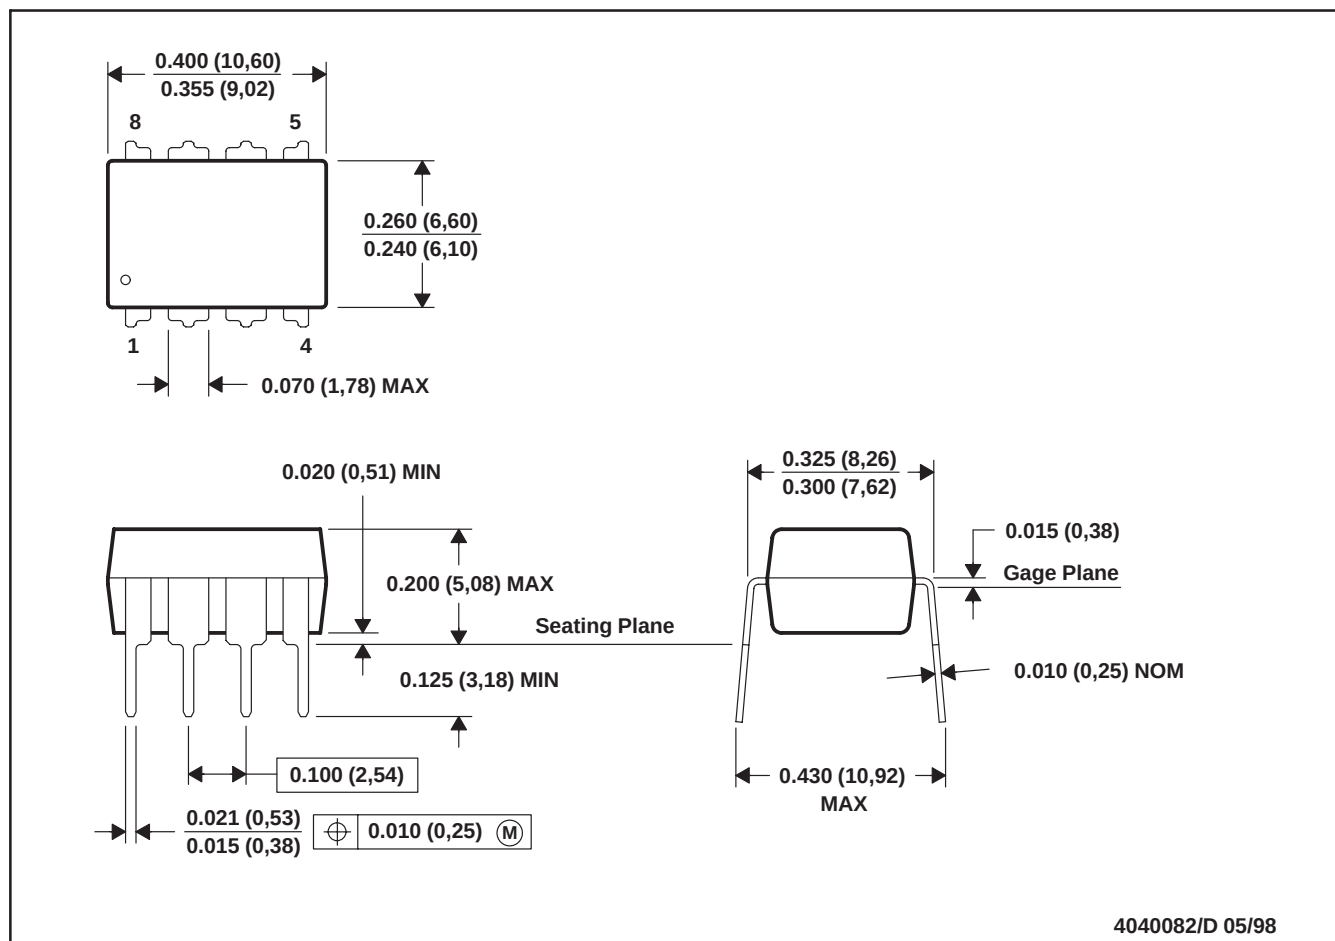

- NOTES: A. All linear dimensions are in inches (millimeters).  
 B. This drawing is subject to change without notice.  
 C. Falls within JEDEC MS-001




# MECHANICAL DATA


## N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE

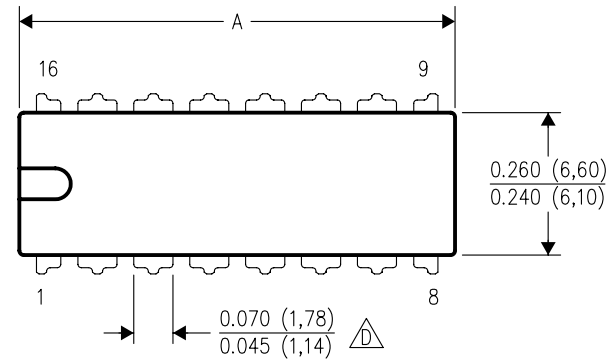

| PINS **             | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| DIM                 |                  |                  |                  |                  |
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |

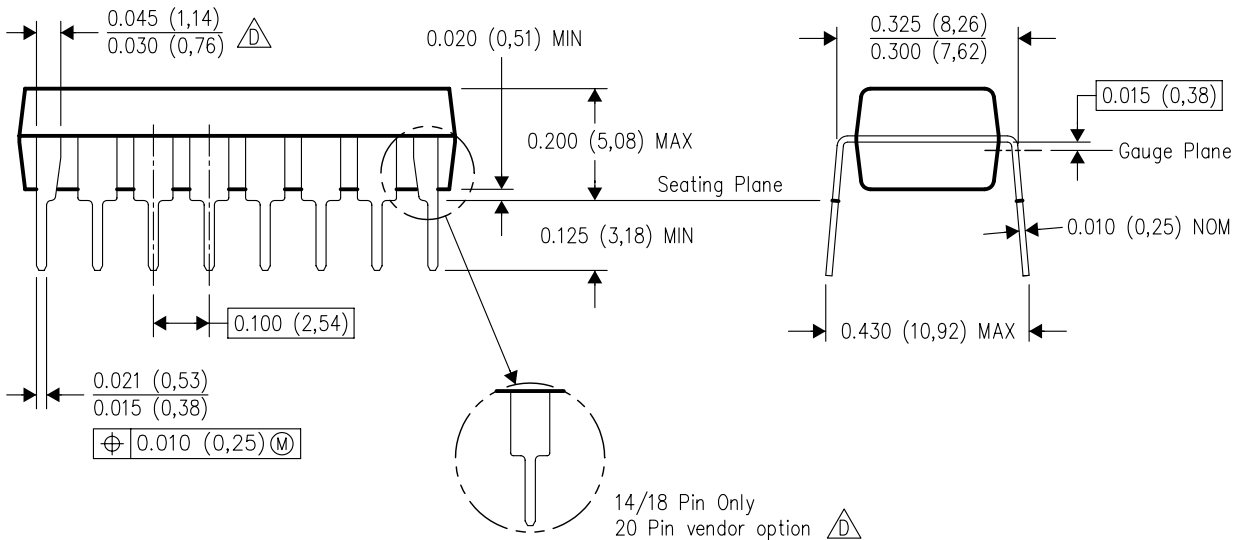


4040049/E 12/2002

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).
  - D. The 20 pin end lead shoulder width is a vendor option, either half or full width.

# MECHANICAL DATA

DBV (R-PDSO-G5)


PLASTIC SMALL-OUTLINE PACKAGE

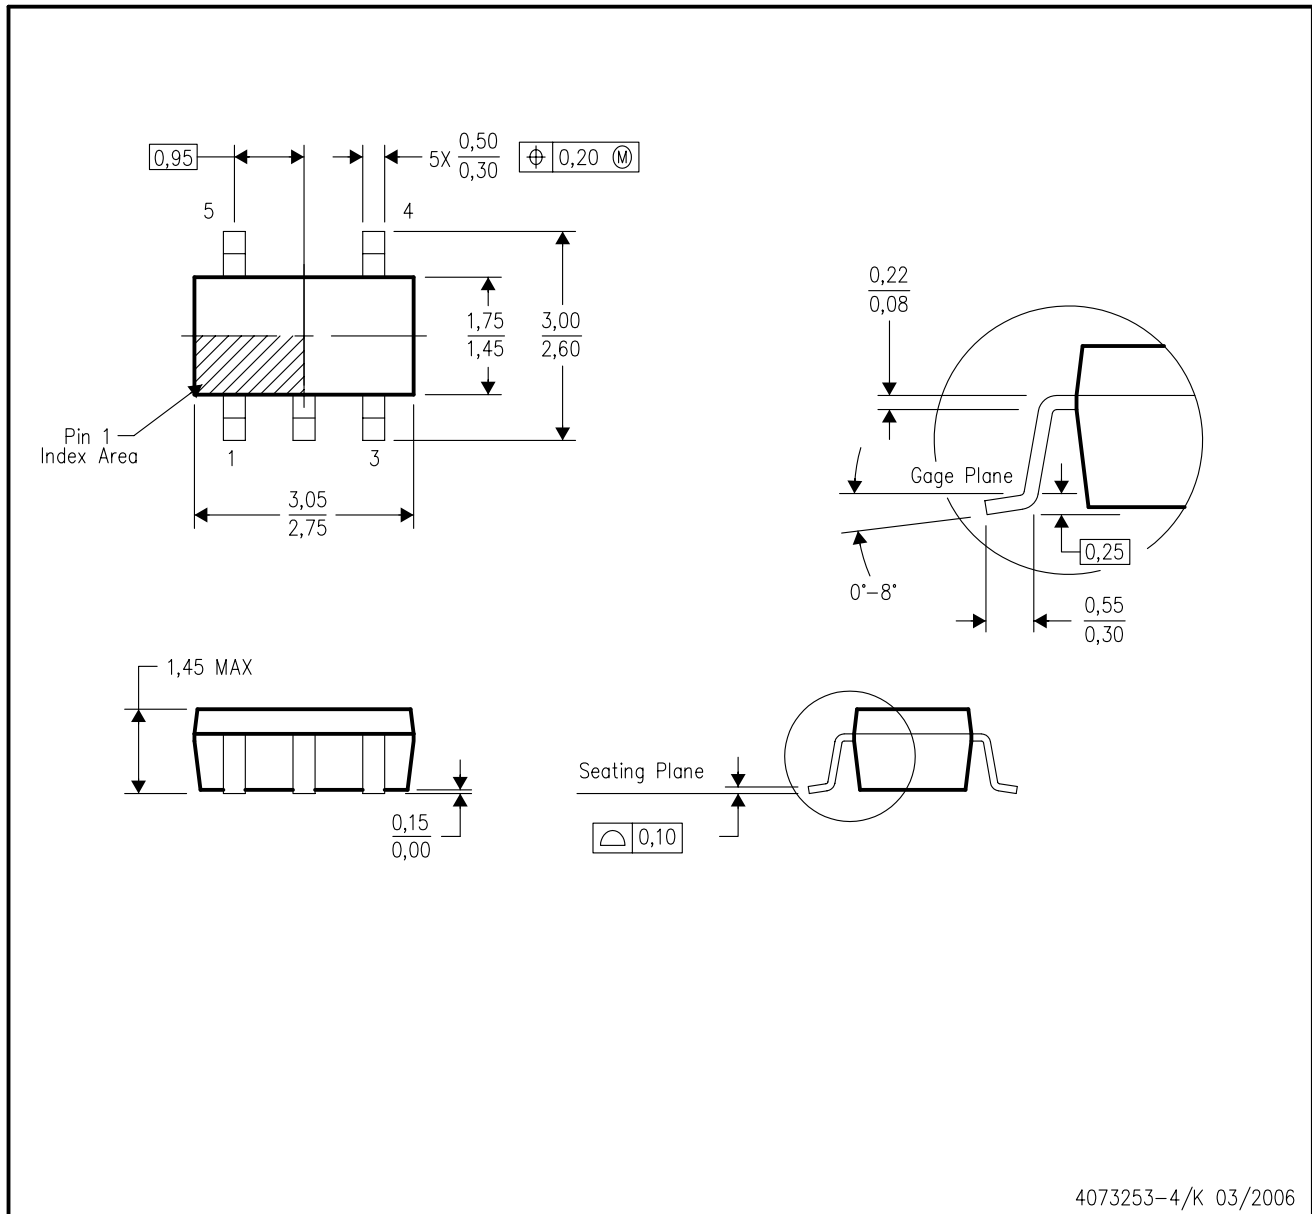

- NOTES:
- All linear dimensions are in millimeters.
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion. Mold flash and protrusion shall not exceed 0.15 per side.
  - Falls within JEDEC MO-178 Variation AA.

DGK (S-PDSO-G8)

## PLASTIC SMALL-OUTLINE PACKAGE

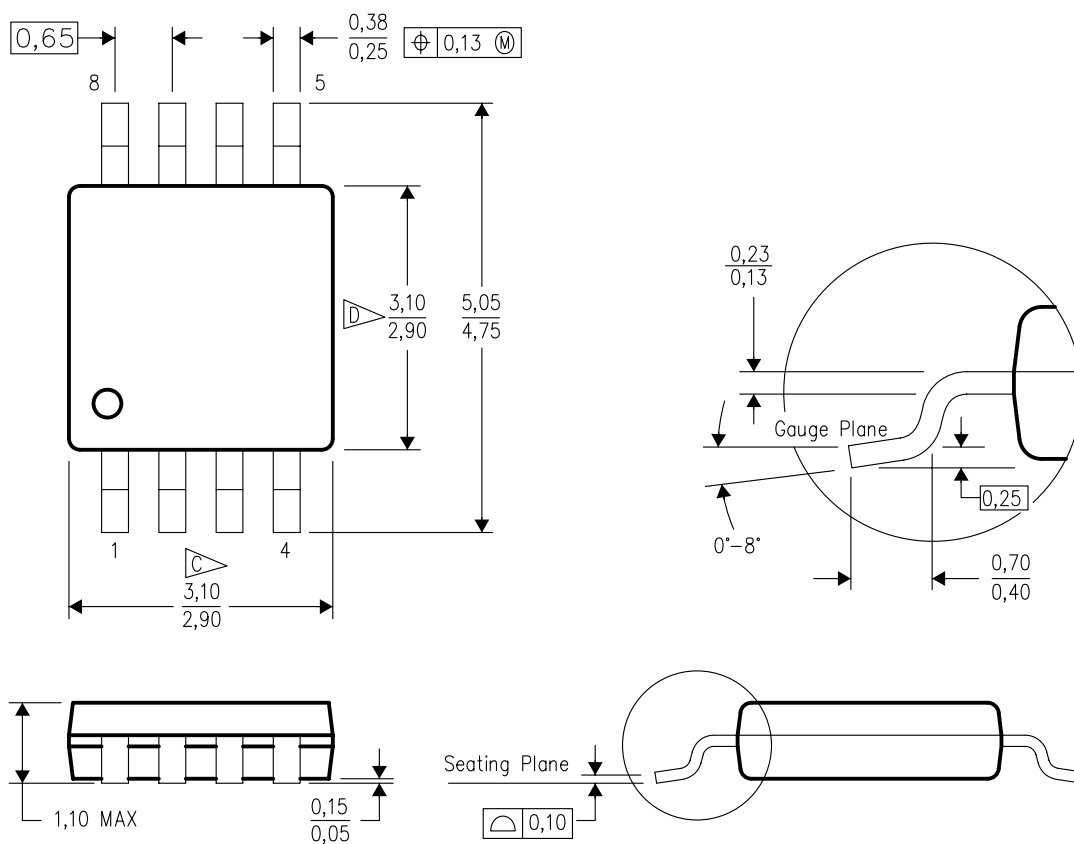

4073329/E 05/06


NOTES:

- A. All linear dimensions are in millimeters.
- B. This drawing is subject to change without notice.
- C** Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.15 per end.
- D** Body width does not include interlead flash. Interlead flash shall not exceed 0.50 per side.
- E. Falls within JEDEC MO-187 variation AA, except interlead flash.

# MECHANICAL DATA

DGS (S-PDSO-G10)

PLASTIC SMALL-OUTLINE PACKAGE

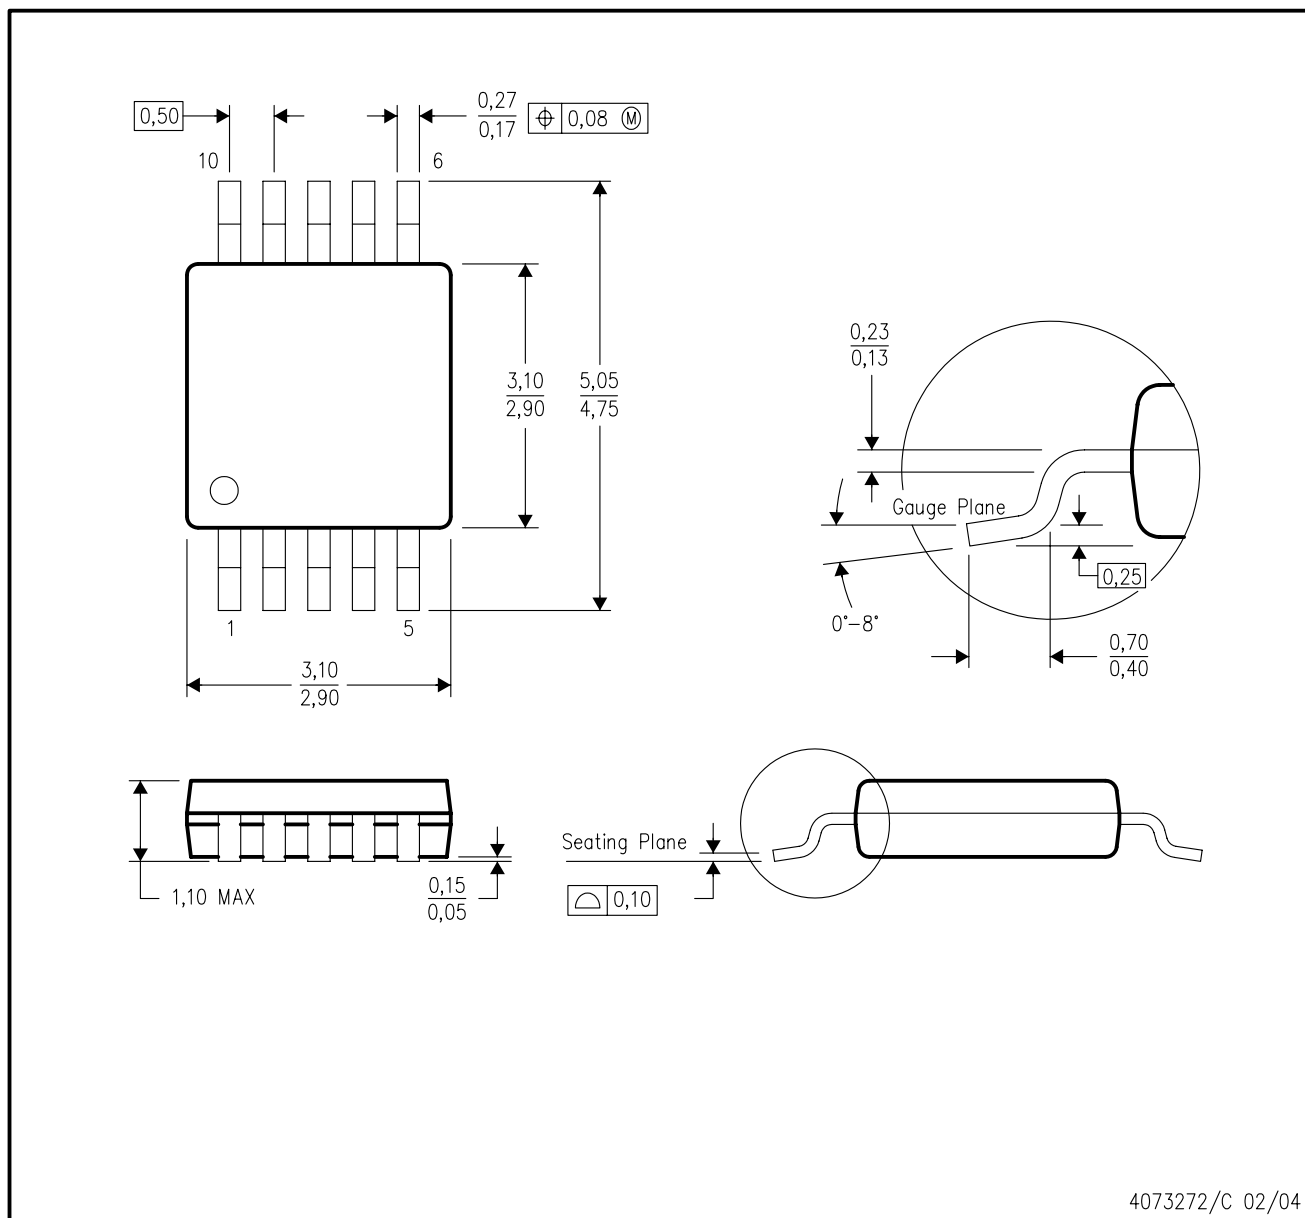


- NOTES:
- A. All linear dimensions are in millimeters.
  - B. This drawing is subject to change without notice.
  - C. Body dimensions do not include mold flash or protrusion.
  - D. Falls within JEDEC MO-187 variation BA.

# MECHANICAL DATA

## D (R-PDSO-G14)

## PLASTIC SMALL-OUTLINE PACKAGE

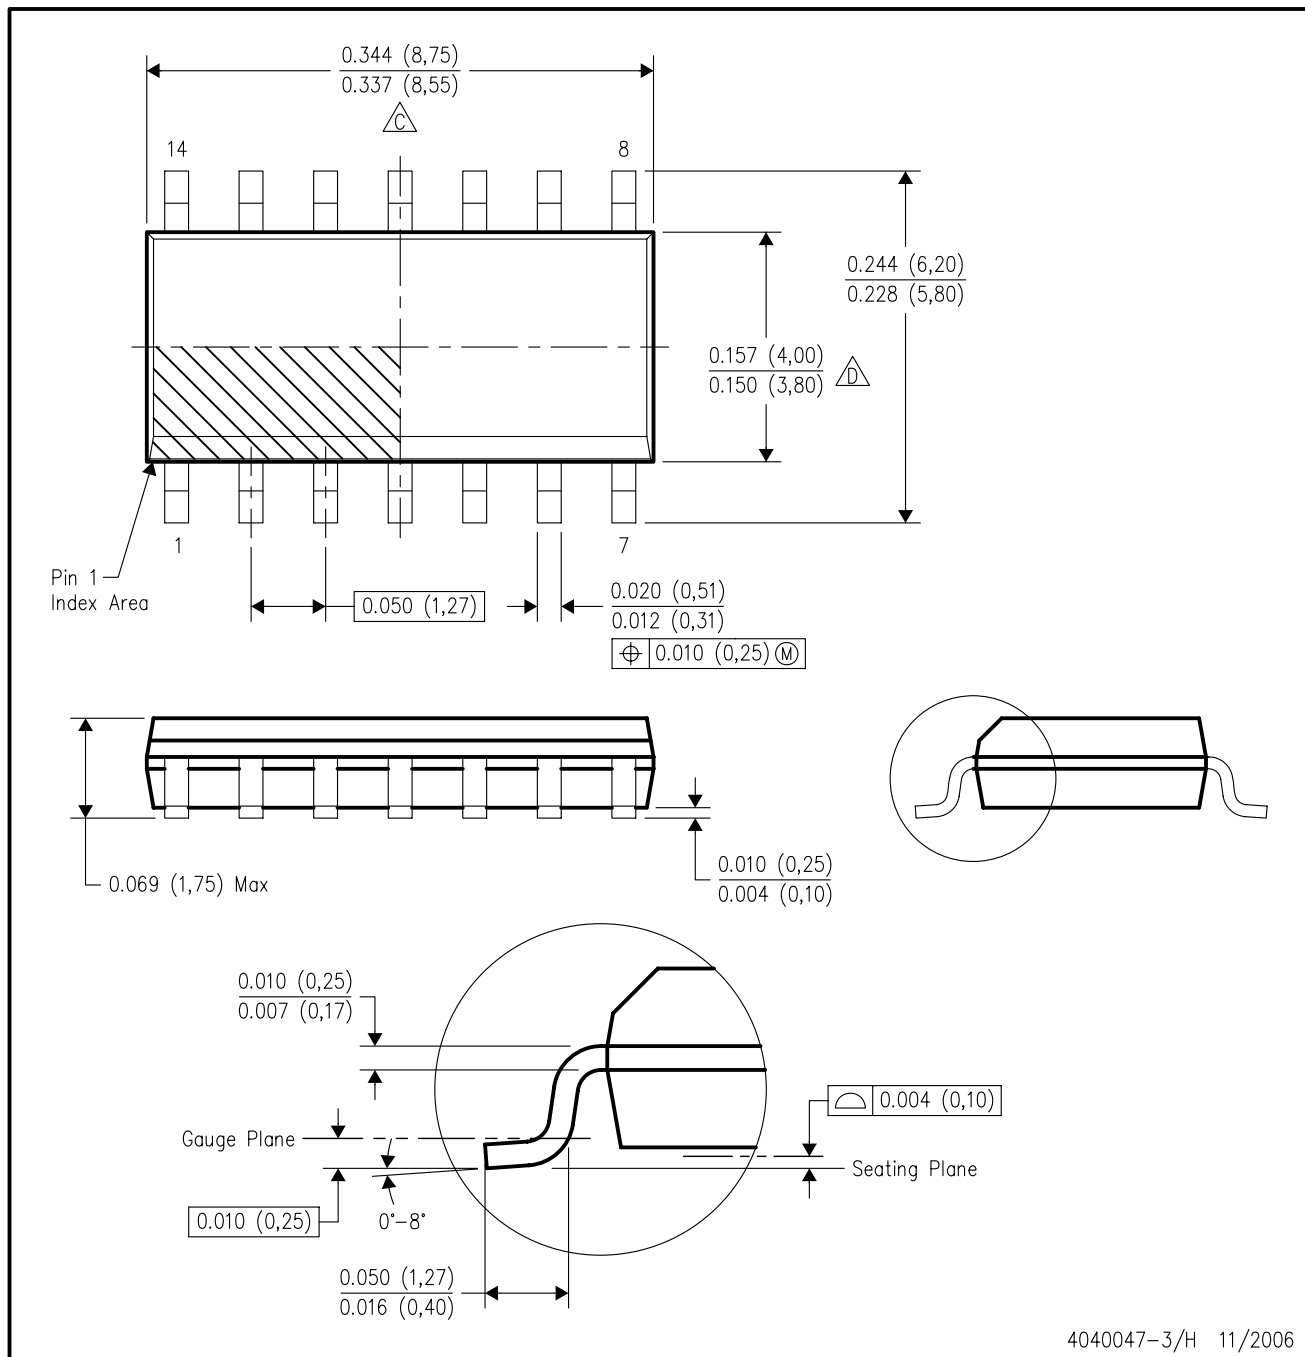

4040047-3/H 11/2006


### NOTES:

- All linear dimensions are in inches (millimeters).
- This drawing is subject to change without notice.
- Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- Reference JEDEC MS-012 variation AB.

# MECHANICAL DATA

## D (R-PDSO-G16)

## PLASTIC SMALL-OUTLINE PACKAGE

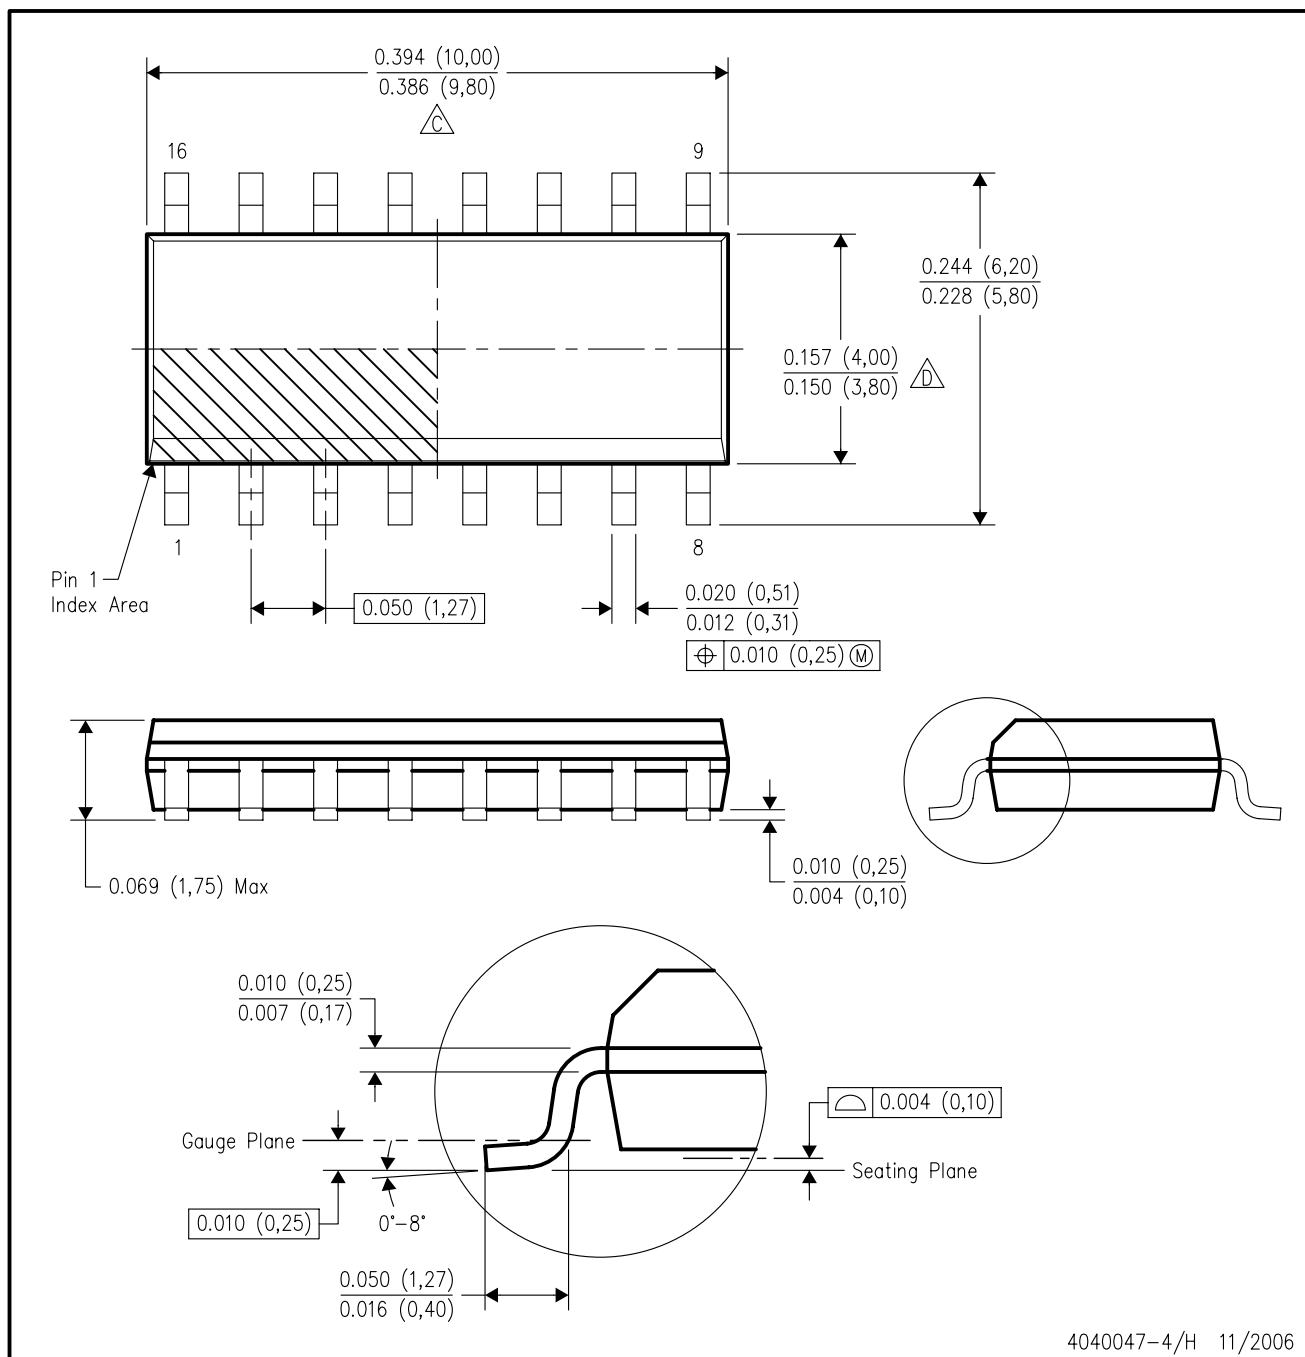

4040047-4/H 11/2006


### NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AC.

# MECHANICAL DATA

## D (R-PDSO-G8)

## PLASTIC SMALL-OUTLINE PACKAGE

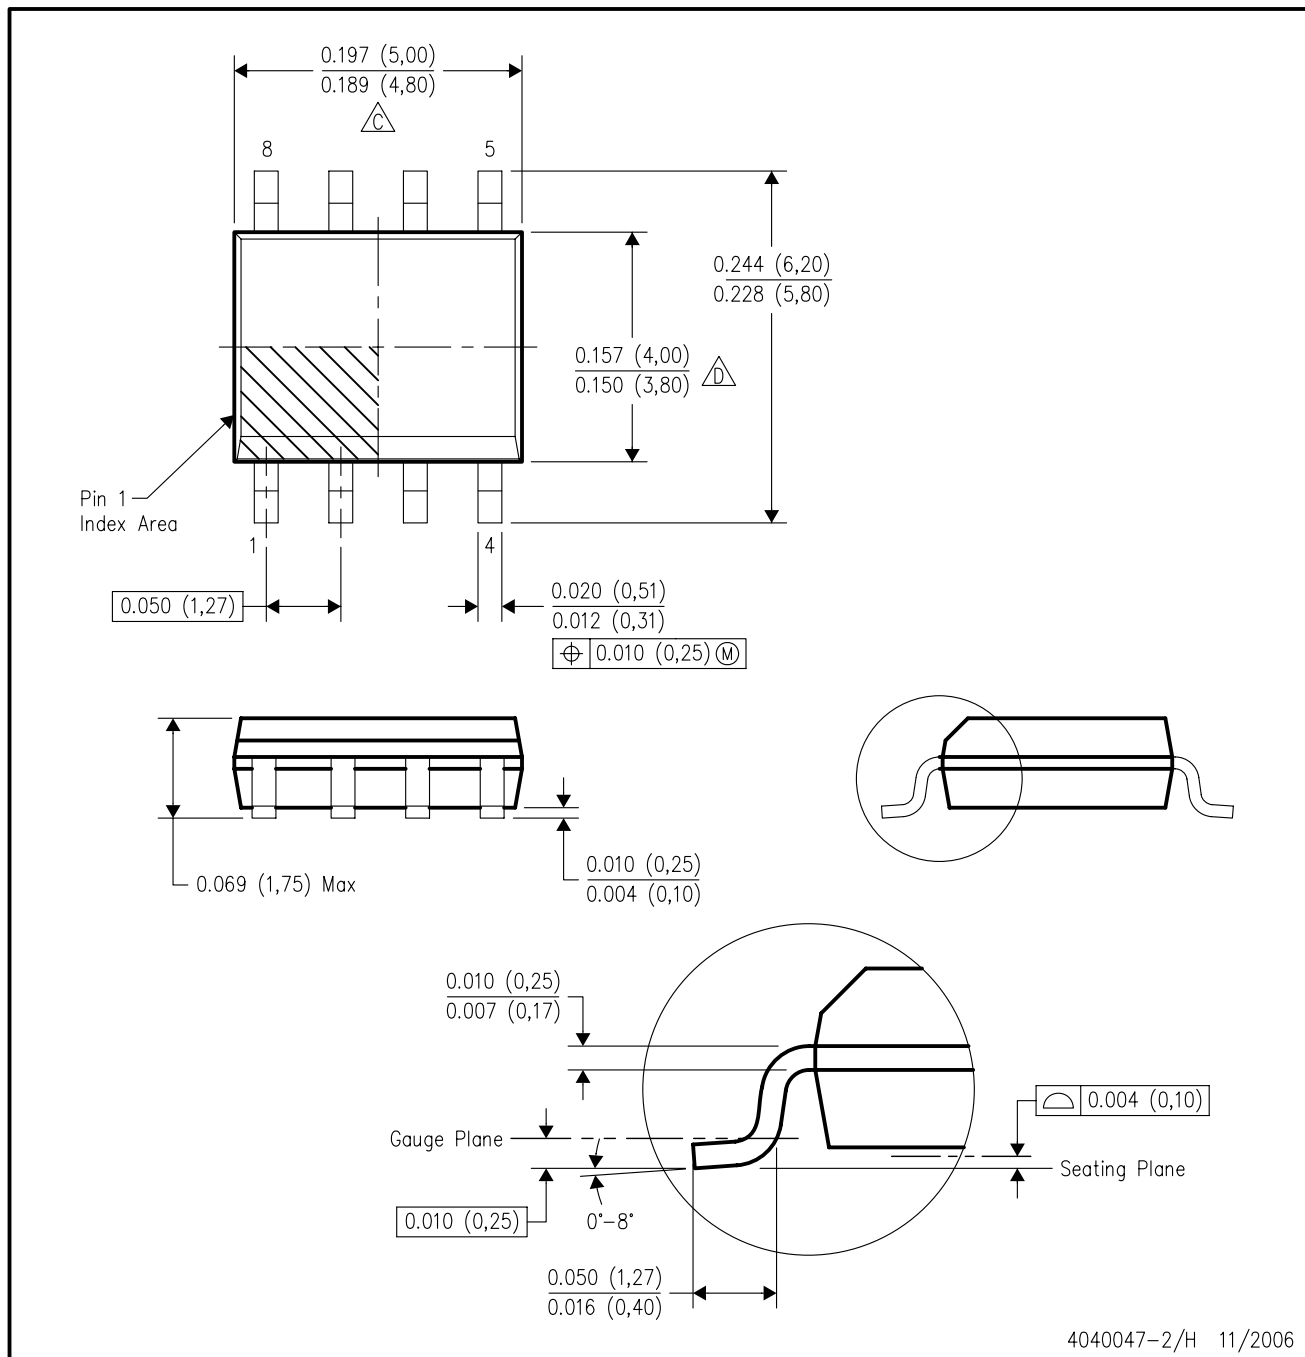

4040047-2/H 11/2006

### NOTES:

- A. All linear dimensions are in inches (millimeters).
- B. This drawing is subject to change without notice.
- C. Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed .006 (0,15) per end.
- D. Body width does not include interlead flash. Interlead flash shall not exceed .017 (0,43) per side.
- E. Reference JEDEC MS-012 variation AA.


# MECHANICAL DATA

MTSS001C – JANUARY 1995 – REVISED FEBRUARY 1999

PW (R-PDSO-G\*\*)

PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

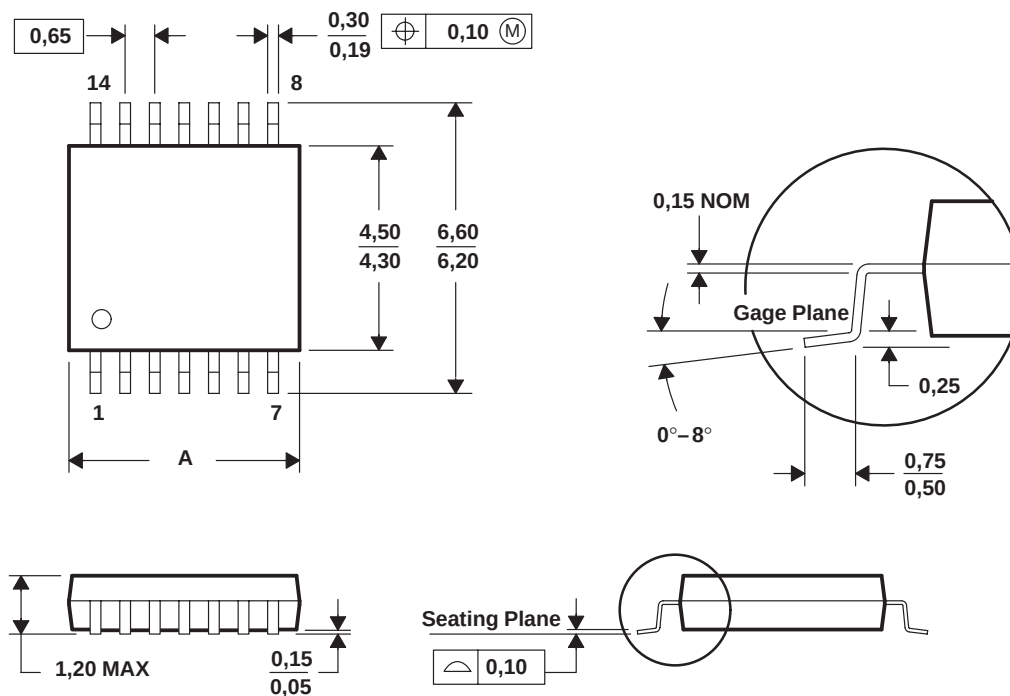

| PINS ** | 8    | 14   | 16   | 20   | 24   | 28   |
|---------|------|------|------|------|------|------|
| DIM     |      |      |      |      |      |      |
| A MAX   | 3,10 | 5,10 | 5,10 | 6,60 | 7,90 | 9,80 |
| A MIN   | 2,90 | 4,90 | 4,90 | 6,40 | 7,70 | 9,60 |

4040064/F 01/97

- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153



## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

### Products

|                  |                                                                    |
|------------------|--------------------------------------------------------------------|
| Amplifiers       | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             |
| Data Converters  | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     |
| DSP              | <a href="http://dsp.ti.com">dsp.ti.com</a>                         |
| Interface        | <a href="http://interface.ti.com">interface.ti.com</a>             |
| Logic            | <a href="http://logic.ti.com">logic.ti.com</a>                     |
| Power Mgmt       | <a href="http://power.ti.com">power.ti.com</a>                     |
| Microcontrollers | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> |
| RFID             | <a href="http://www.ti-rfid.com">www.ti-rfid.com</a>               |
| Low Power        | <a href="http://www.ti.com/lpw">www.ti.com/lpw</a>                 |
| Wireless         |                                                                    |

### Applications

|                    |                                                                          |
|--------------------|--------------------------------------------------------------------------|
| Audio              | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Automotive         | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| Broadband          | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Digital Control    | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Military           | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Optical Networking | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Security           | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Telephony          | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
| Video & Imaging    | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
| Wireless           | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |