



2RI 100E-060/080

2-Pack Diode
600/800 V
100 A

POWER DIODE MODULE


Features

- All the terminals and the mounting plate are electrically isolated. These modules can be installed in the same cooling fin as other modules, thus saving installation space – a cost-effective feature.
- The diode chips are coated with a glass of zinc oxide, making them highly resistant to temperature and humidity variation.
- Two diodes chips are connected in series internally, so allowing the rectifying circuit to be simplified.

Applications


- Inverters for AC motors
- Power supply units for DC motors
- DC power supply units for battery chargers
- General purpose DC power supply units

■ Outline Drawings

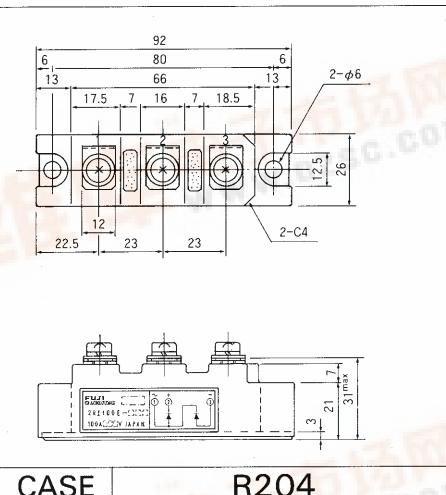

CASE R204

■ Inner Circuit Schematic

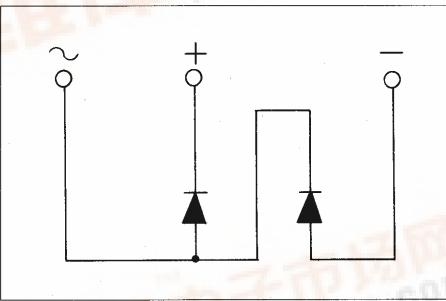

■ Maximum Ratings and Characteristics

• Absolute Maximum Ratings

Items	Symbols	Conditions	2RI100E		Units
			-060	-080	
Repetitive peak reverse voltage	V_{RRM}		600	800	V
Non-repetitive peak reverse voltage	V_{RSM}		660	880	V
Average forward current	$I_{F(AV)}$	50/60 Hz Sinewave, $T_C = 103^\circ C$	2×100		A
Surge current	I_{FSM}	Rated load conditions	2000		A
I^2_t	I^2_t	Rated load conditions	16000		A ² s
Junction temperature	T_j		-40~+150		°C
Storage temperature	T_{stg}		-40~+150		°C
Tightening torque		Mounting screw: M5	25±5		kg·cm
Vibration resistance			5		G
Dielectric strength		Between terminals and base	2000 VAC 1min		
Net. Weight			180		g

• Electrical Characteristics


Items	Symbols	Conditions	Min	Typ	Max	Units
Forward voltage	V_{FM}	$T_j=25^\circ C$, $I_{FM}=320 A$			1.30	V
Reverse current	I_{RRM}	$T_j=150^\circ C$, $V_R=V_{RRM}$			20	mA

• Thermal Characteristics


Items	Symbols	Conditions	Min	Typ	Max	Units
Thermal resistance (Junction to case)	$R_{th(j-c)}$	50/60 Hz Sinewave, Thermal resistance for total loss			0.20	°C/W
Thermal resistance	$R_{th(c-f)}$	With thermal compound			0.10	°C/W




■ Characteristic curves

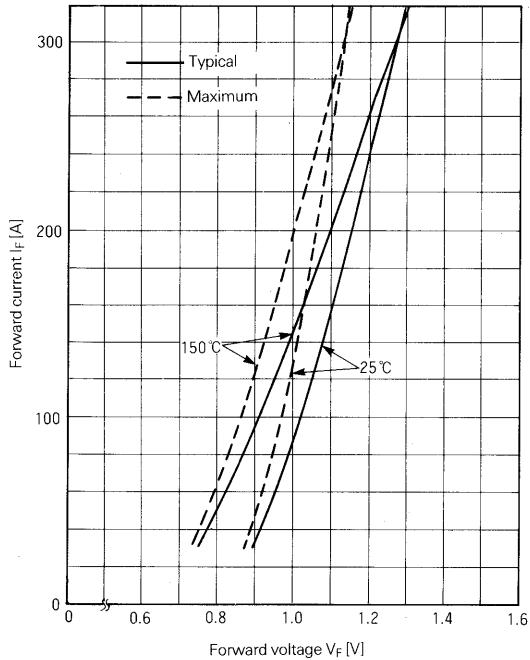

Forward Characteristics

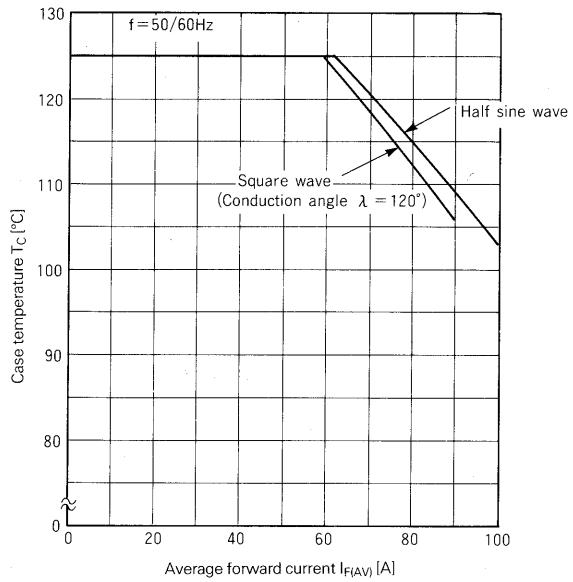

Case Temperature — Forward Average Current

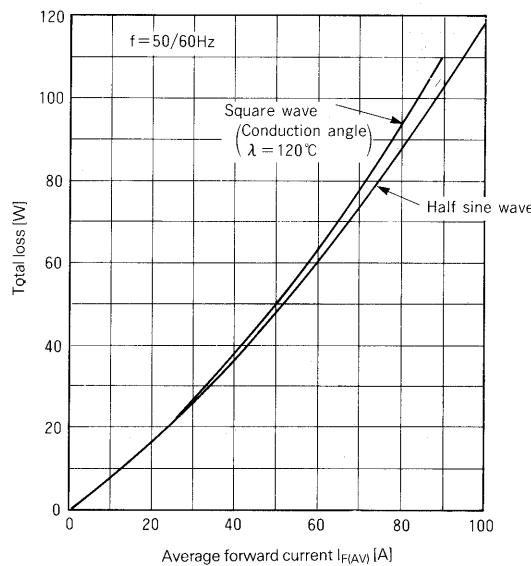


Power Loss — Forward Average Current


FUJI
ELECTRIC

2RI 100E-060/080

2-Pack Diode
600/800 V
100 A

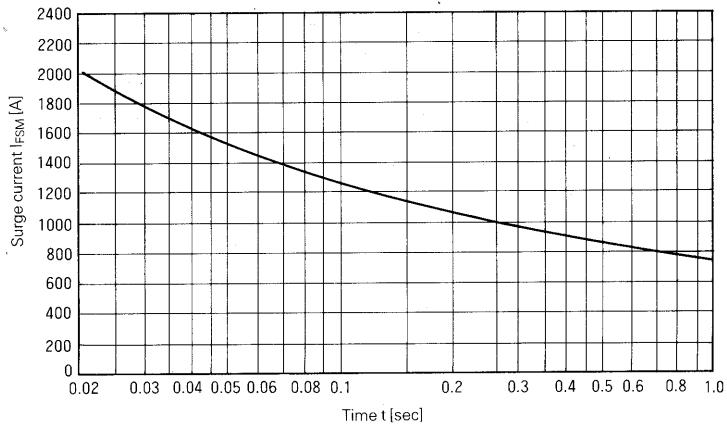

Surge Current

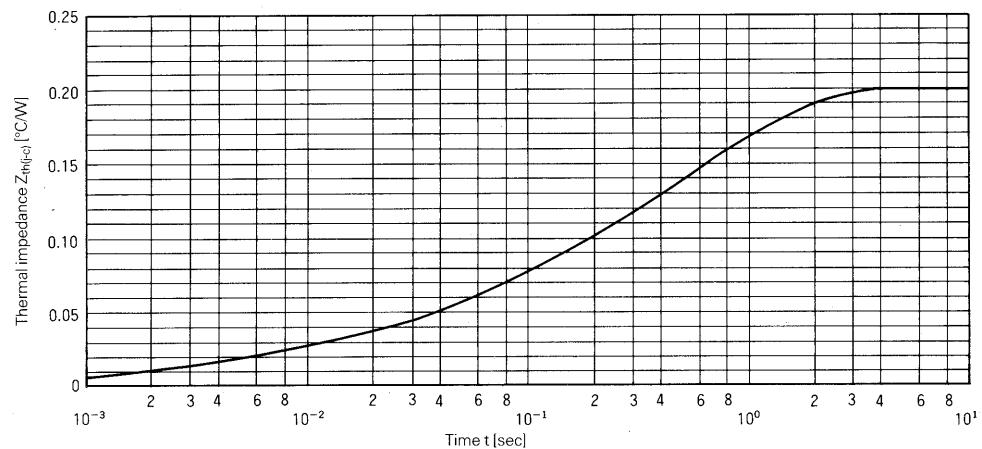

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>