





APTGF50X60RTP3 APTGF50X60BTP3

**Input rectifier bridge +
Brake + 3 Phase Bridge
NPT IGBT Power Module**

**$V_{CES} = 600V$
 $I_C = 50A @ T_c = 80^\circ C$**

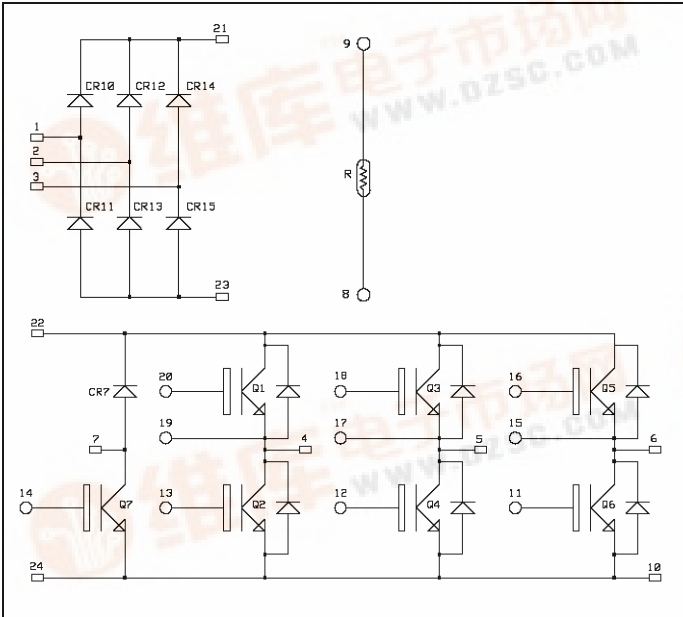

APTGF50X60RTP3: Without Brake (Pin 7 & 14 not connected)

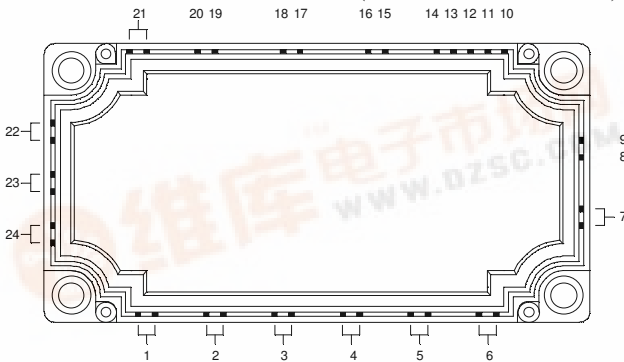

Application

- AC Motor control

Features

- Non Punch Through (NPT) Fast IGBT®
 - Low voltage drop
 - Low tail current
 - Switching frequency up to 50 kHz
 - Soft recovery parallel diodes
 - Low diode VF
 - Low leakage current
 - Avalanche energy rated
 - RBSOA and SCSOA rated
- Very low stray inductance
- High level of integration
- Internal thermistor for temperature monitoring

Benefits

- Low conduction losses
- Stable temperature behavior
- Very rugged
- Solderable terminals for easy PCB mounting
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Easy paralleling due to positive TC of VCESat
- Low profile

All ratings @ $T_j = 25^\circ C$ unless otherwise specified

1. Absolute maximum ratings

Diode rectifier Absolute maximum ratings

Symbol	Parameter	Max ratings	Unit	
V_{RRM}	Repetitive Peak Reverse Voltage	1600	V	
I_D	DC Forward Current	$T_c = 80^\circ C$ 80	A	
I_{FSM}	Surge Forward Current	$t_p = 10ms$ $T_j = 25^\circ C$		500
		$T_j = 150^\circ C$		400

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.



IGBT & Diode Brake (only for APTGF50X60BTP3) Absolute maximum ratings

<i>Symbol</i>	<i>Parameter</i>	<i>Max ratings</i>	<i>Unit</i>
V _{CES}	Collector - Emitter Breakdown Voltage	600	V
I _C	Continuous Collector Current	T _C = 25°C	35
		T _C = 80°C	25
I _{CM}	Pulsed Collector Current	T _C = 25°C	70
V _{GE}	Gate - Emitter Voltage	±20	V
P _D	Maximum Power Dissipation	T _C = 25°C	155
I _F	DC Forward Current	T _C = 80°C	10

IGBT & Diode Inverter Absolute maximum ratings

<i>Symbol</i>	<i>Parameter</i>	<i>Max ratings</i>	<i>Unit</i>
V _{CES}	Collector - Emitter Breakdown Voltage	600	V
I _C	Continuous Collector Current	T _C = 25°C	70
		T _C = 80°C	50
I _{CM}	Pulsed Collector Current	T _C = 25°C	125
V _{GE}	Gate - Emitter Voltage	±20	V
P _D	Maximum Power Dissipation	T _C = 25°C	250
RBSOA	Reverse Bias Safe Operating Area	T _j = 125°C	225A @ 360V
I _F	DC Forward Current	T _C = 80°C	30
I _{FRM}	Repetitive Peak Forward Current	t _p = 1ms	80

2. Electrical Characteristics

Diodes Rectifier Electrical Characteristics

<i>Symbol</i>	<i>Characteristic</i>	<i>Test Conditions</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>
I _R	Reverse Current	V _R = 1600V T _j = 150°C		3		mA
V _F	Forward Voltage	I _F = 50A T _j = 150°C		1.0		V
R _{thJC}	Junction to Case				0.65	°C/W

IGBT Brake & Diode (only for APTGF50X60BTP3) Electrical Characteristics

<i>Symbol</i>	<i>Characteristic</i>	<i>Test Conditions</i>	<i>Min</i>	<i>Typ</i>	<i>Max</i>	<i>Unit</i>
I _{CES}	Zero Gate Voltage Collector Current	V _{GE} = 0V, V _{CE} = 600V		1	500	µA
V _{CE(on)}	Collector Emitter on Voltage	V _{GE} = 15V I _C = 20A	T _j = 25°C	2.0	2.5	V
			T _j = 125°C	2.2		
V _{GE(th)}	Gate Threshold Voltage	V _{GE} = V _{CE} , I _C = 0.5mA	4.5	5.5	6.5	V
I _{GES}	Gate - Emitter Leakage Current	V _{GE} = 20V, V _{CE} = 0V			400	nA
C _{ies}	Input Capacitance	V _{GE} = 0V, V _{CE} = 25V f = 1MHz		1100		pF
C _{res}	Reverse Transfer Capacitance			70		
V _F	Forward Voltage	V _{GE} = 0V I _F = 10A	T _j = 25°C	1.25	1.7	V
			T _j = 125°C	1.2		
R _{thJC}	Junction to Case		IGBT		0.8	°C/W
			Diode		2.3	

IGBT & Diode Inverter Electrical Characteristics

Symbol	Characteristic	Test Conditions	Min	Typ	Max	Unit
BV _{CES}	Collector - Emitter Breakdown Voltage	V _{GE} = 0V, I _C = 500μA	600			V
I _{CES}	Zero Gate Voltage Collector Current	V _{GE} = 0V, V _{CE} = 600V		1	500	μA
V _{CE(on)}	Collector Emitter on Voltage	V _{GE} = 15V I _C = 50A		T _j = 25°C 2.2	2.45	V
V _{GE(th)}	Gate Threshold Voltage	V _{GE} = V _{CE} , I _C = 1 mA	4.5	5.5	6.5	V
I _{GES}	Gate - Emitter Leakage Current	V _{GE} = 20V, V _{CE} = 0V			400	nA
C _{ies}	Input Capacitance	V _{GE} = 0V, V _{CE} = 25V		2200		pF
C _{res}	Reverse Transfer Capacitance	f = 1MHz		200		
T _{d(on)}	Turn-on Delay Time	Inductive Switching (25°C) V _{GE} = ±15V V _{Bus} = 300V I _C = 50A R _G = 2.7Ω		40		ns
T _r	Rise Time			9		
T _{d(off)}	Turn-off Delay Time			120		
T _f	Fall Time			12		
T _{d(on)}	Turn-on Delay Time	Inductive Switching (125°C) V _{GE} = ±15V V _{Bus} = 300V I _C = 50A R _G = 2.7Ω		42		ns
T _r	Rise Time			10		
T _{d(off)}	Turn-off Delay Time			132		
T _f	Fall Time			21		
E _{off}	Turn off Energy			1.0		mJ
V _F	Forward Voltage	V _{GE} = 0V I _F = 50A		T _j = 25°C 1.25	1.6	V
Q _{rr}	Reverse Recovery Charge	I _F = 50A V _R = 300V di/dt=800A/μs		T _j = 25°C 3.4		μC
				T _j = 125°C 5.6		
R _{thJC}	Junction to Case				0.5	°C/W
					0.8	

Temperature sensor NTC

Symbol	Characteristic	Min	Typ	Max	Unit
R ₂₅	Resistance @ 25°C		5		kΩ
B _{25/50}	T ₂₅ = 298.16 K		3375		K


$$R_T = \frac{R_{25}}{\exp \left[B_{25/50} \left(\frac{1}{T_{25}} - \frac{1}{T} \right) \right]}$$

T: Thermistor temperature
R_T: Thermistor value at T

3. Thermal and package characteristics

Symbol	Characteristic	Min	Typ	Max	Unit
V _{ISOL}	RMS Isolation Voltage, any terminal to case t=1 min, I _{isol} <1mA, 50/60Hz	2500			V
T _J	Operating junction temperature range	-40		150	°C
T _{STG}	Storage Temperature Range	-40		125	
T _C	Operating Case Temperature	-40		125	
Torque	Mounting torque	To Heatsink	M5		3.3 N.m
Wt	Package Weight				300 g

4. Package outline

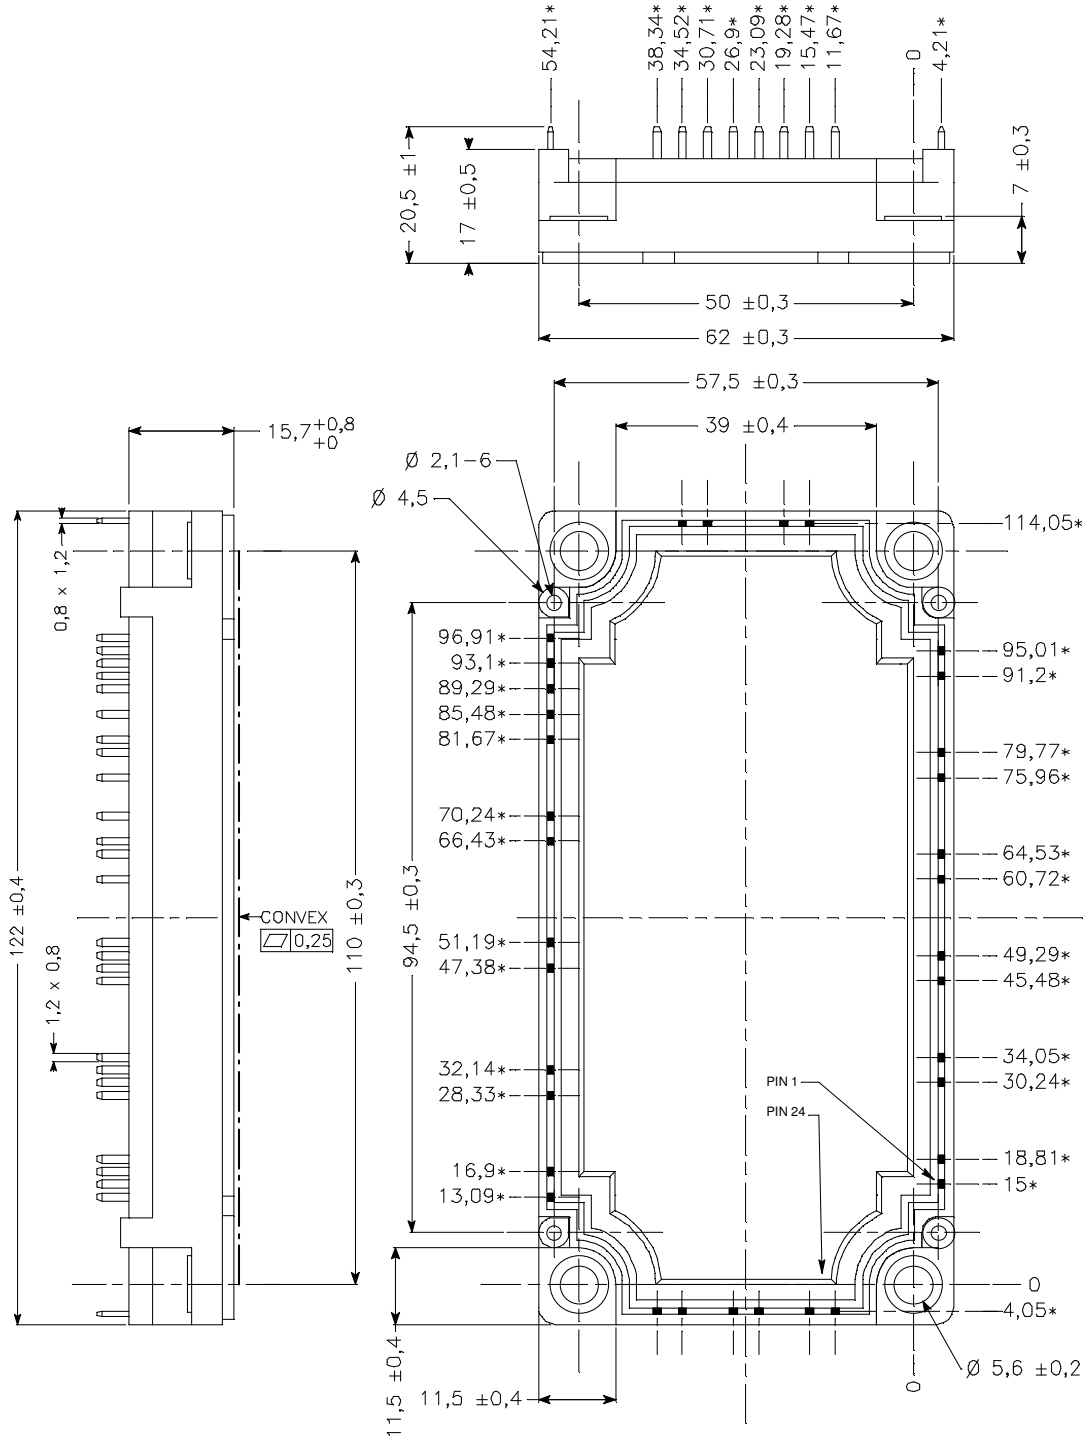

ALL DIMENSIONS MARKED "*" ARE TOLERENCED AS : $\oplus \ominus 0,4$

APT reserves the right to change, without notice, the specifications and information contained herein

APT's products are covered by one or more of U.S. patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.