

BRC144ECM Series

NPN Built-in Resistor Transistor CMPAK Series
Inverter, Driver, Switching

HITACHI

ADE-208-1445B (Z)


Rev.2
Sep. 2001

Features


- Built-in Resistor Type
- Simplifies Circuit Design
- Reduces Board Space
- Complementary pair with BRA144ECM series

Outline

CMPAK



1. Ground (Emitter)
2. Input (Base)
3. Output (Collector)



Note: Marking is shown in below.

Device	Marking	R1 (k Ω)	R2 (k Ω)
BRC144ECM	BG	47	47
BRC124ECM	DG	22	22
BRC114ECM	FG	10	10
BRC143ECM	HG	4.7	4.7
BRC123ECM	KG	2.2	2.2

BRC144ECM Series

Absolute Maximum Ratings

($T_a = 25^\circ\text{C}$)


Item		Symbol	Ratings	Unit
Supply voltage		V_{CC}	50	V
Input voltage	BRC144ECM	V_I	-10 to +50	V
	BRC124ECM		-10 to +45	
	BRC114ECM		-10 to +30	
	BRC143ECM		-10 to +20	
	BRC123ECM		-10 to +15	
Output current		I_o	100	mA
Total power dissipation		P_T^*	150	mW
Junction temperature		T_j	150	$^\circ\text{C}$
Storage temperature		T_{stg}	-55 to +150	$^\circ\text{C}$

*Value on the glass epoxy board. (10 mm × 10 mm × 0.7 mm)






Electrical Characteristics

(Ta = 25°C)






Item		Symbol	Min	Typ	Max	Unit	Test conditions
Input on voltage	BRC144ECM	$V_{I(on)}$	1.5	—	4.5	V	$V_{cc} = 0.3 \text{ V}, I_o = 5 \text{ mA}$
	BRC124ECM		1.3	—	3.0		
	BRC114ECM		1.2	—	2.4		
	BRC143ECM		1.1	—	2.0		
	BRC123ECM		1.1	—	1.8		
Input off voltage	BRC144ECM	$V_{I(off)}$	1.0	—	1.5	V	$V_{cc} = 5 \text{ V}, I_o = 100 \mu\text{A}$
	BRC124ECM		1.0	—	1.5		
	BRC114ECM		1.0	—	1.5		
	BRC143ECM		1.0	—	1.5		
	BRC123ECM		1.0	—	1.5		
Output saturation voltage		$V_{O(on)}$	—	—	0.3	V	$I_o = 10 \text{ mA}, I_1 = 0.5 \text{ mA}$
Output cutoff current		$I_{O(off)}$	—	—	0.5	μA	$V_{cc} = 50 \text{ V}, I_1 = 0$
DC current transfer ratio	BRC144ECM	G_i	70	—	—		$V_{cc} = 5 \text{ V}, I_o = 5 \text{ mA}$
	BRC124ECM		56	—	—		
	BRC114ECM		30	—	—		
	BRC143ECM		20	—	—		$V_{cc} = 5 \text{ V}, I_o = 10 \text{ mA}$
	BRC123ECM		20	—	—		$V_{cc} = 5 \text{ V}, I_o = 20 \text{ mA}$
Input resistance	BRC144ECM	R_i	33	47	61	$\text{k}\Omega$	
	BRC124ECM		15	22	28		
	BRC114ECM		7	10	13		
	BRC143ECM		3.3	4.7	6.1		
	BRC123ECM		1.5	2.2	2.8		
Resistance ratio		R_1/R_2	0.8	1.0	1.2		

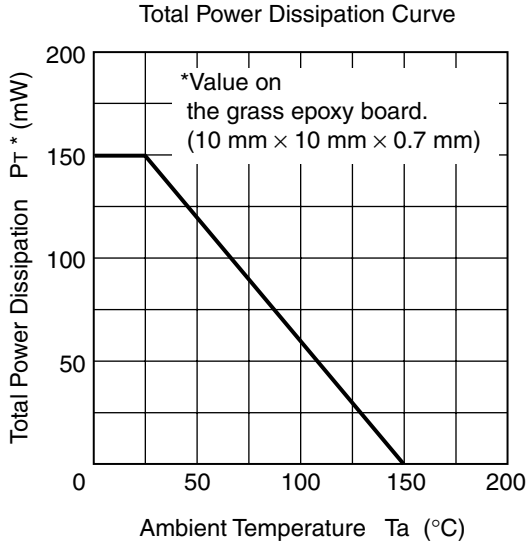






Main Characteristics (BRC144ECM)

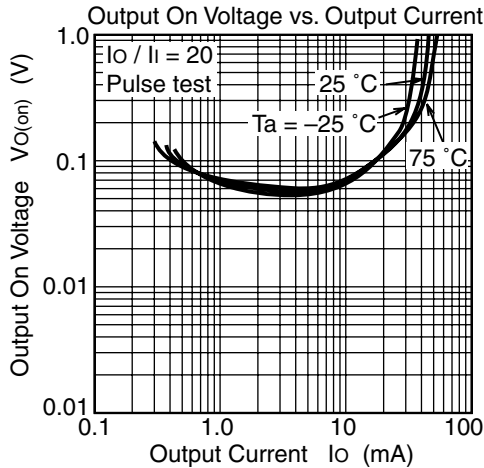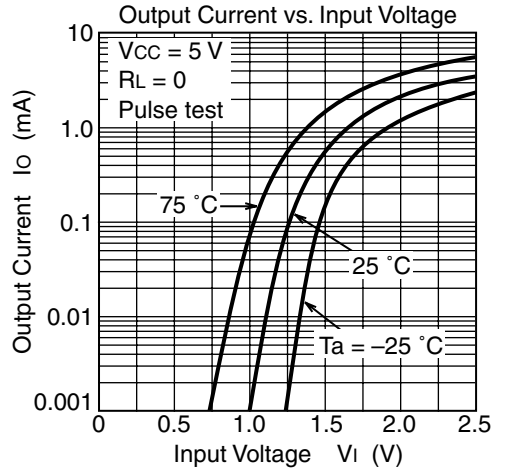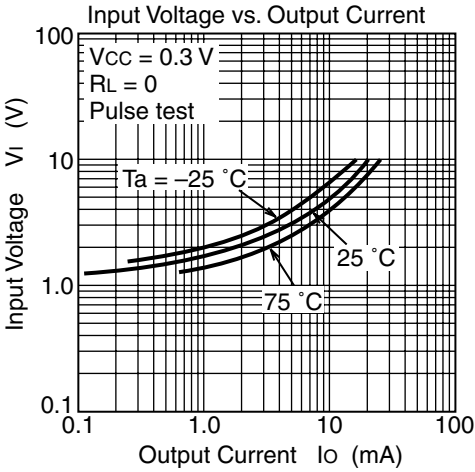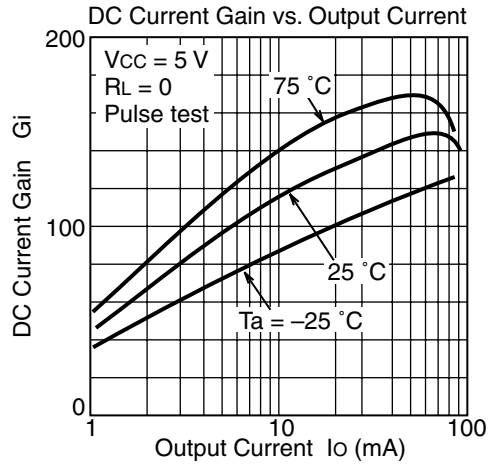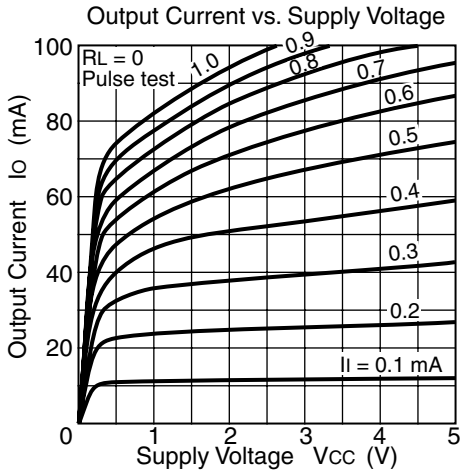






Main Characteristics (BRC124ECM)

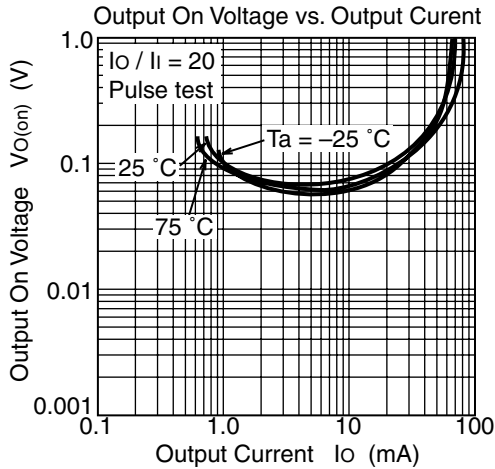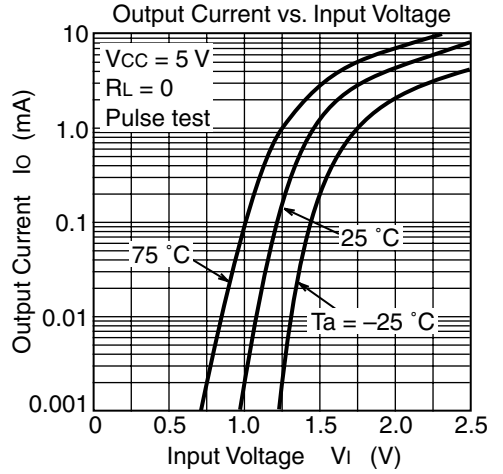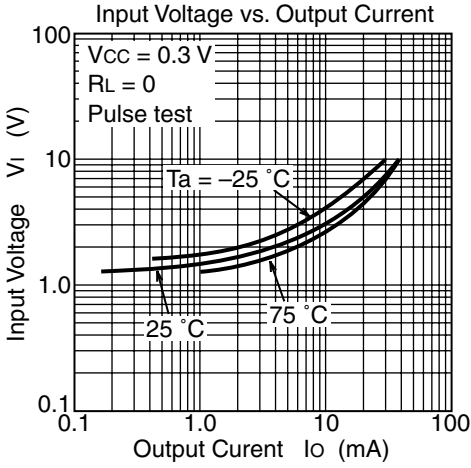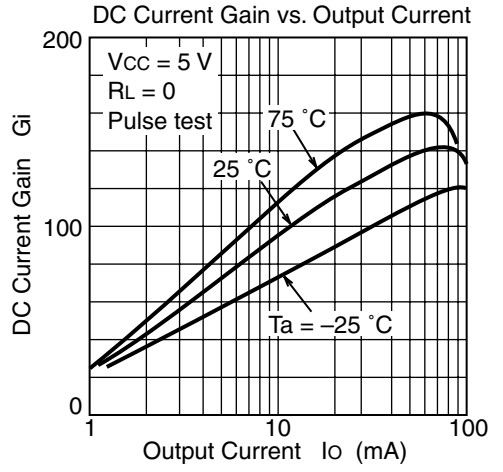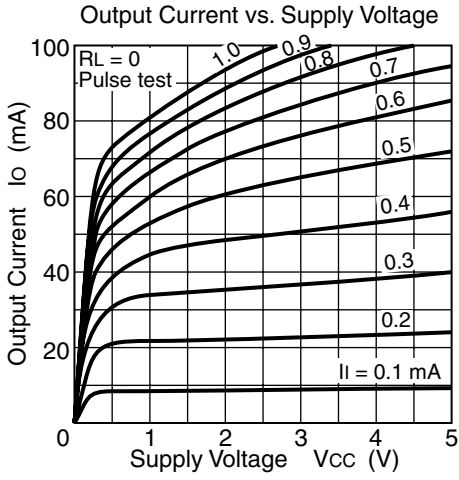






Main Characteristics (BRC114ECM)

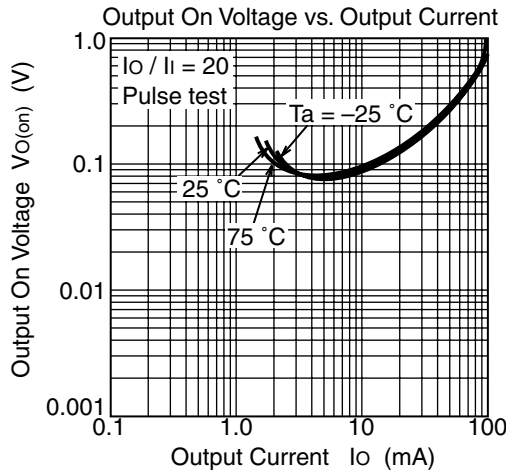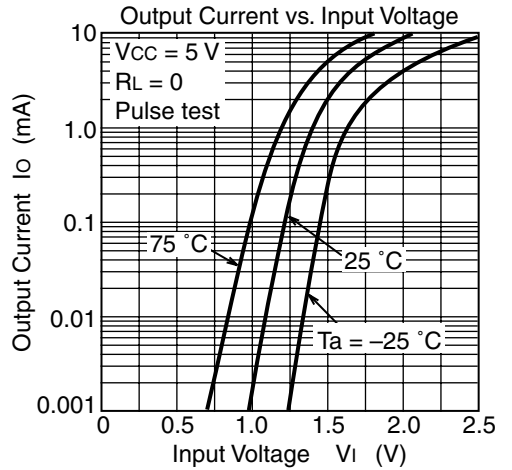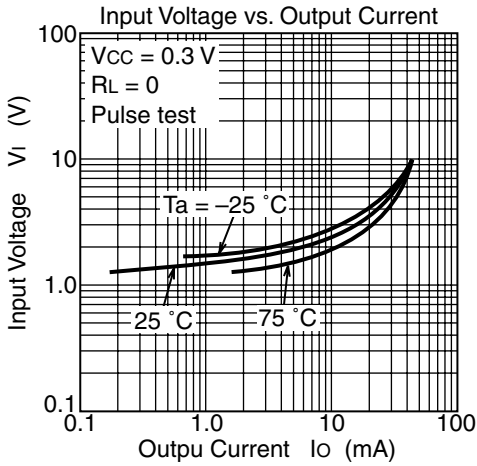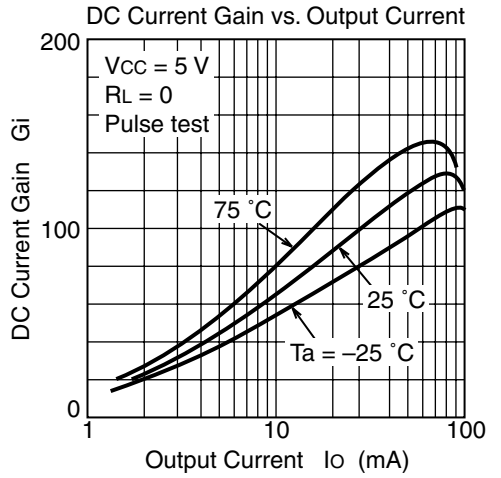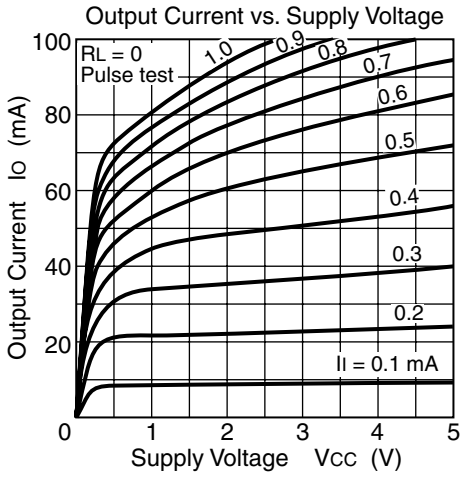

Main Characteristics (BRC143ECM)

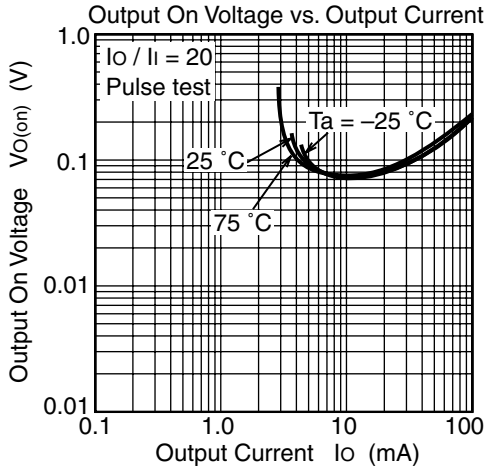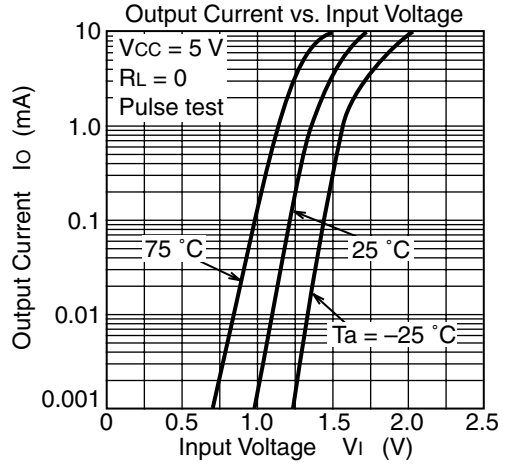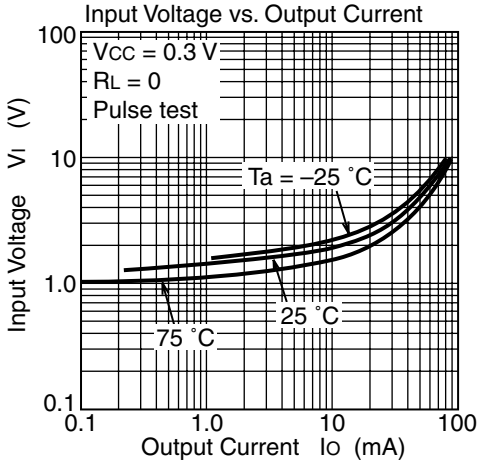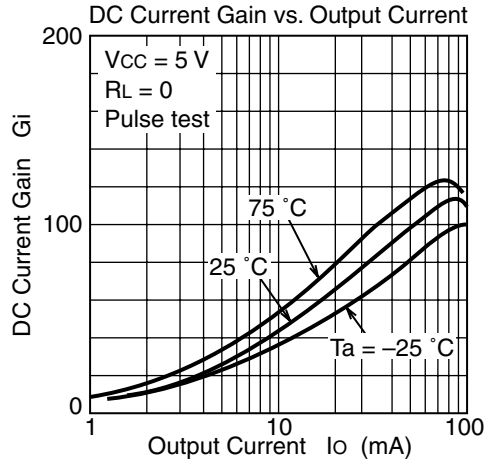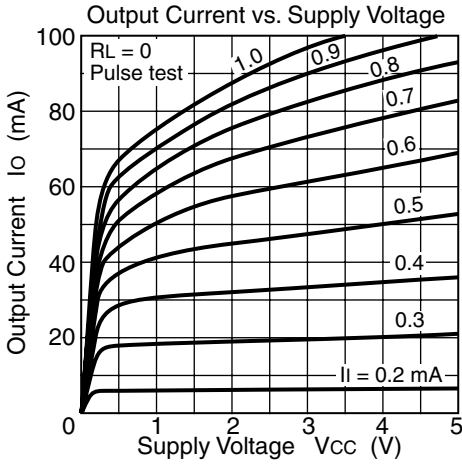

Main Characteristics (BRC123ECM)

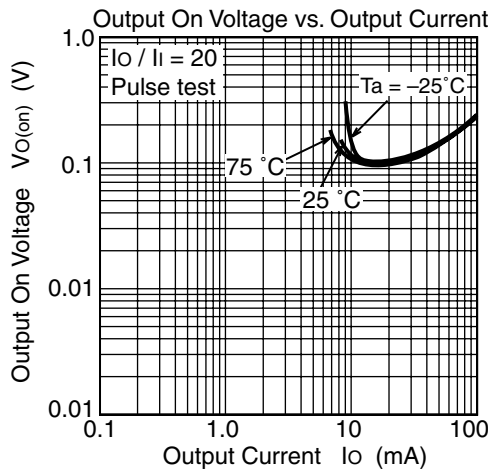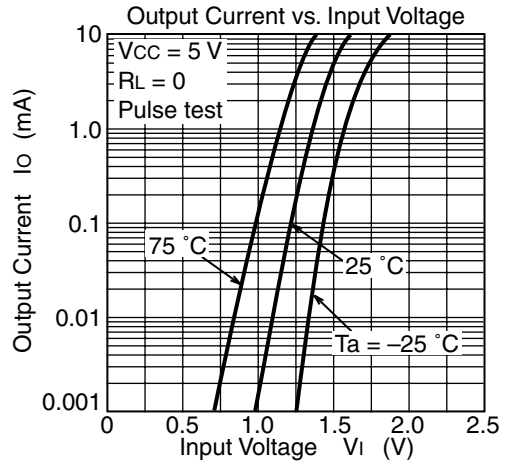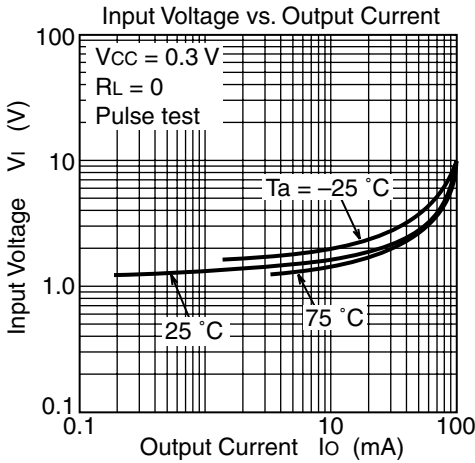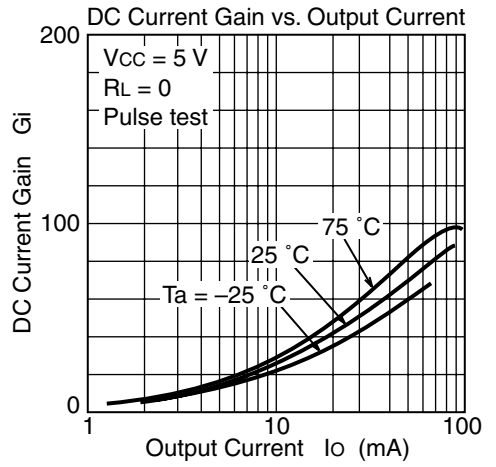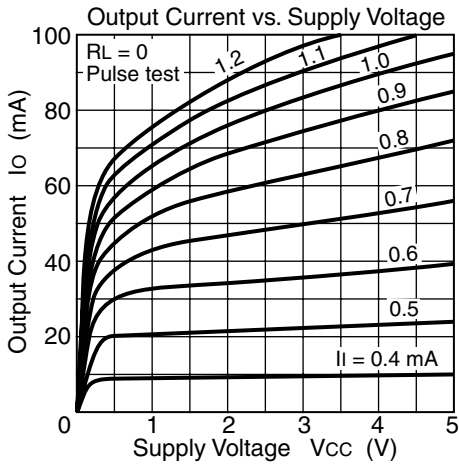

Taping Specification


There are two different size reels in CMPAK packaging.

Packing to “Left” direction


Purchasing Identification Code

Standard Reel 3000 pcs/reel: Type No. + Mark **TL**

Large Reel 12000 pcs/reel: Type No. + Mark **UL**



Marking face is up.
Center lead goes to left.

Direction of feed 

Disclaimer

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

Sales Offices

HITACHI

Hitachi, Ltd.

Semiconductor & Integrated Circuits
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan
Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL <http://www.hitachisemiconductor.com/>

For further information write to:

Hitachi Semiconductor (America) Inc. 179 East Tasman Drive San Jose, CA 95134 Tel: <1> (408) 433-1990 Fax: <1>(408) 433-0223	Hitachi Europe Ltd. Electronic Components Group Whitebrook Park Lower Cookham Road Maidenhead Berkshire SL6 8YA, United Kingdom Tel: <44> (1628) 585000 Fax: <44> (1628) 585200
--	--

Hitachi Asia Ltd. Hitachi Tower 16 Collyer Quay #20-00 Singapore 049318 Tel : <65>-538-6533/538-8577 Fax : <65>-538-6933/538-3877 URL : http://semiconductor.hitachi.com.sg

Hitachi Asia (Hong Kong) Ltd. Group III (Electronic Components) 7/F., North Tower World Finance Centre, Harbour City, Canton Road Tsim Sha Tsui, Kowloon Hong Kong Tel : <852>-(2)-735-9218 Fax : <852>-(2)-730-0281 URL : http://semiconductor.hitachi.com.hk
--

Hitachi Europe GmbH Electronic Components Group Dornacher Straße 3 D-85622 Feldkirchen Postfach 201, D-85619 Feldkirchen Germany Tel: <49> (89) 9 9180-0 Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd. (Taipei Branch Office) 4/F, No. 167, Tun Hwa North Road Hung-Kuo Building Taipei (105), Taiwan Tel : <886>-(2)-2718-3666 Fax : <886>-(2)-2718-8180 Telex : 23222 HAS-TP URL : http://www.hitachi.com.tw

Copyright © Hitachi, Ltd., 2001. All rights reserved. Printed in Japan.
Colophon 5.0

Copyright © Each Manufacturing Company.

All Datasheets cannot be modified without permission.

This datasheet has been download from :

www.AllDataSheet.com

100% Free DataSheet Search Site.

Free Download.

No Register.

Fast Search System.

www.AllDataSheet.com