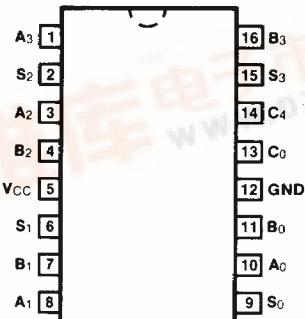


查询7483A供应商

捷多邦，专业PCB打样工厂 24小时加急出货

CONNECTION DIAGRAM
PINOUT A

010003
54/7483A
010005
54LS/74LS83A


4-BIT BINARY FULL ADDER
(With Fast Carry)

DESCRIPTION — The '83A high speed 4-bit binary full adders with internal carry lookahead accept two 4-bit binary words (A₀ — A₃, B₀ — B₃) and a Carry input (C₀). They generate the binary Sum outputs (S₀ — S₃) and the Carry output (C₄) from the most significant bit. They operate with either HIGH or active LOW operands (positive or negative logic). The '283 is recommended for new designs since it features standard corner power pins.

ORDERING CODE: See Section 9

PKGS	PIN OUT	COMMERCIAL GRADE	MILITARY GRADE	PKG TYPE
		V _{CC} = +5.0 V ±5%, T _A = 0° C to +70° C	V _{CC} = +5.0 V ±10%, T _A = -55° C to +125° C	
Plastic DIP (P)	A	7483APC, 74LS83APC		9B
Ceramic DIP (D)	A	7483ADC, 74LS83ADC	5483ADM, 54LS83ADM	6B
Flatpak (F)	A	7483AFC, 74LS83AFC	5483AFM, 54LS83AFM	4L

LOGIC SYMBOL

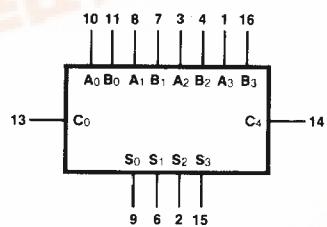

V_{CC} = Pin 5
GND = Pin 12

INPUT LOADING/FAN-OUT: See Section 3 for U.L. definitions

PIN NAMES	DESCRIPTION	54/74 (U.L.) HIGH/LOW	54/74LS (U.L.) HIGH/LOW
A ₀ — A ₃	A Operand Inputs	1.0/1.0	1.0/0.5
B ₀ — B ₃	B Operand Inputs	1.0/1.0	1.0/0.5
C ₀	Carry Input	1.0/1.0	0.5/0.25
S ₀ — S ₃	Sum Outputs	20/10	10/5.0 (2.5)
C ₄	Carry Output	10/5.0	10/5.0 (2.5)

FUNCTIONAL DESCRIPTION — The '83A adds two 4-bit binary words (A and B) plus the incoming carry. The binary sum appears on the sum outputs (S_0 — S_3) and outgoing carry (C_4) outputs.

$$C_0 + (A_0 + B_0) + 2(A_1 + B_1) + 4(A_2 + B_2) + 8(A_3 + B_3) = S_0 + 2S_1 + 4S_2 + 8S_3 + 16C_4$$

Where: (+) = plus

Due to the symmetry of the binary add function the '83A can be used with either all inputs and outputs active HIGH (positive logic) or with all inputs and outputs active LOW (negative logic). Note that with active HIGH inputs, Carry In can not be left open, but must be held LOW when no carry in is intended.

Interchanging inputs of equal weight does not affect the operation, thus C_0 , A_0 , B_0 can be arbitrarily assigned to pins 10, 11, 13, etc.

TRUTH TABLE


	INPUTS								OUTPUTS					
	C_0	A_0	A_1	A_2	A_3	B_0	B_1	B_2	B_3	S_0	S_1	S_2	S_3	C_4
Logic Levels	L	L	H	L	H	H	L	L	H	H	H	L	L	H
Active HIGH	0	0	1	0	1	1	0	0	1	1	1	0	0	1
Active LOW	1	1	0	1	0	0	1	1	0	0	0	1	1	0

(10 + 9 = 19)

(carry + 5 + 6 = 12)

H = HIGH Voltage Level
L = LOW Voltage Level

LOGIC DIAGRAM

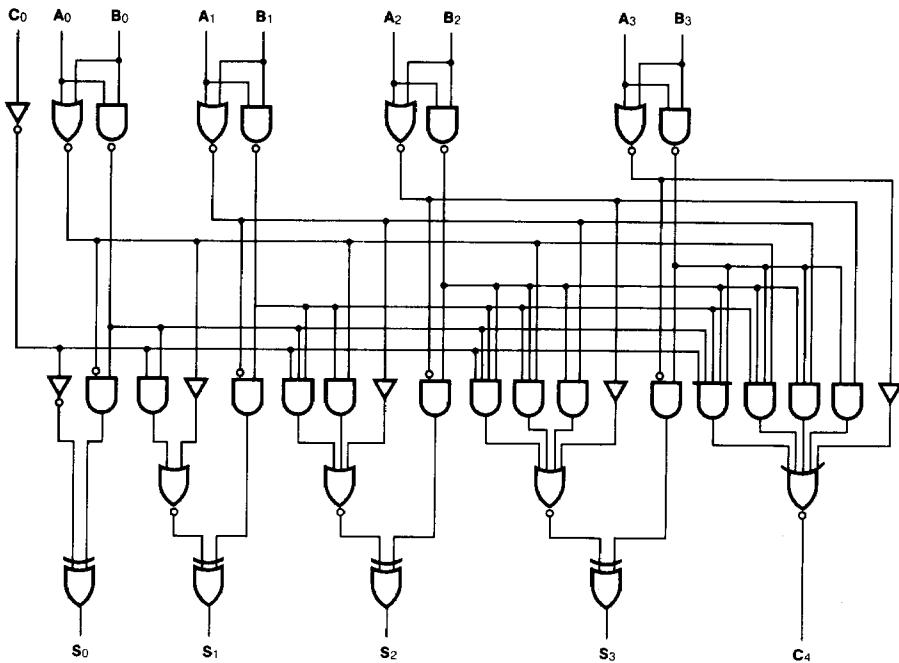

83A

DC CHARACTERISTICS OVER OPERATING TEMPERATURE RANGE (unless otherwise specified)

SYMBOL	PARAMETER	54/74		54/74LS		UNITS	CONDITIONS	
		Min	Max	Min	Max			
I _{OS}	Output Short Circuit Current at S _n	XM	-20	-55	-20	-100	mA	V _{CC} = Max
		XC	-18	-55	-20	-100		
I _{OS}	Output Short Circuit Current at C ₄	XM	-20	-70	-20	-100	mA	V _{CC} = Max
		XC	-18	-70	-20	-100		
I _{CC}	Power Supply Current	XM		99	39	mA	V _{CC} = Max, Inputs = Gnd ('LS83A) Inputs = 4.5 V ('83A)	
		XC		110	39			

AC CHARACTERISTICS: V_{CC} = 5.0 V, T_A = 25°C (See Section 3 for waveforms and load configurations)

SYMBOL	PARAMETER	54/74		54/74LS		UNITS	CONDITIONS		
		C _L = 15 pF R _L = 400 Ω		C _L = 15 pF					
		Min	Max	Min	Max				
t _{PLH} t _{PHL}	Propagation Delay C ₀ to S _n	21	21	24	24	ns	Figs. 3-1, 3-20		
t _{PLH} t _{PHL}	Propagation Delay A _n or B _n to S _n	24	24	24	24	ns	Figs. 3-1, 3-20		
t _{PLH} t _{PHL}	Propagation Delay C ₀ to C ₄	14	16	17	17	ns	Figs. 3-1, 3-5 R _L = 780 Ω ('83A)		
t _{PLH} t _{PHL}	Propagation Delay A _n or B _n to C ₄	14	16	17	17	ns	Figs. 3-1, 3-5 R _L = 780 Ω ('83A)		