

AMC DOC. #: AMC7585_E (LF)
Feb 2005



AMC7585

5A LOW DROPOUT REGULATOR


| DESCRIPTION | FEATURES |
|--|--|
| <p>The AMC7585 is a high performance low dropout regulator rated for 5A output current with fixed 2.5V/3.3V/5.0V and adjustable output. It is designed for use in applications requiring low dropout characteristics over the rated current range.</p> <p>On chip trimming adjusts the reference voltage to 1%. These features are ideal for low voltage microprocessor applications requiring a regulated 2.5V to 3.6V power supply.</p> <p>In addition, the AMC7585 provides the device protections including over current and thermal shutdown. Also, reverse battery protection scheme limits the reverse current when the input voltage falls below the output.</p> | <ul style="list-style-type: none"> ■ Input-Output differential of typical 1.1V at 5A and low quiescent current ■ Output current is excess of 5A □ Fast transient response □ Reverse battery protection □ Short circuit protection □ Internal thermal overload protection □ Available in 3L plastic TO-220 and surface mount 3L TO-263/252 packages □ Pin assignment identical to EZ1585B and LT1585A series. |

| APPLICATIONS | PACKAGE PIN OUT |
|---|--|
| <ul style="list-style-type: none"> ■ Pentium® Processor Supplies ■ PowerPC™ Supplies ■ Computer Add-On Cards ■ Other Applications Requiring Low Dropout Voltage Over Rated Current. | <p>3-Pin Plastic TO-220 (Top View)</p> |
| | <p>3-Pin Plastic TO-252 Surface Mount (Top View)</p> |
| AMC7585-2.5 – 2.5V Fixed AMC7585-3.3 – 3.3V Fixed AMC7585-5.0 – 5.0V Fixed AMC7585-ADJ – Adjustable | <p>3-Pin Plastic TO-263 (ST) Surface Mount (Top View)</p> |
| | <p>3-Pin Plastic TO-263-3 (ST3) Surface Mount (Top View)</p> |


| ORDER INFORMATION | | | | | | | | |
|---------------------|--------------------------|--------|---------------------------|--------|----------------------------|----------|---------------------------|--------|
| T _A (°C) | T | TO-220 | ST | TO-263 | ST3 | TO-263-3 | SJ | TO-252 |
| | | 3-pin | | 3-pin | | 3-pin | | 3-pin |
| 0 to 70 | AMC7585-X.XT | | AMC7585-X.XST | | | - | AMC7585-X.XSJ | |
| 0 to 70 | AMC7585-X.XTF(Lead Free) | | AMC7585-X.XSTF(Lead Free) | | | - | AMC7585-X.XSJF(Lead Free) | |
| 0 to 70 | AMC7585-ADJT | | AMC7585-ADJST | | AMC7585-ADJST3 | | AMC7585-ADJSJ | |
| 0 to 70 | AMC7585-ADJTF(Lead Free) | | AMC7585-ADJSTF(Lead Free) | | AMC7585-ADJST3F(Lead Free) | | AMC7585-ADJSJF(Lead Free) | |

Note: 1. All surface-mount packages are available in Tape & Reel. Append the letter "T" to part number (i.e., AMC7585-X.XSTT, AMC7585-X.XST3T, AMC7585-X.XSJT).
2. The letter "F" is marked for Lead Free process.

TYPICAL APPLICATION

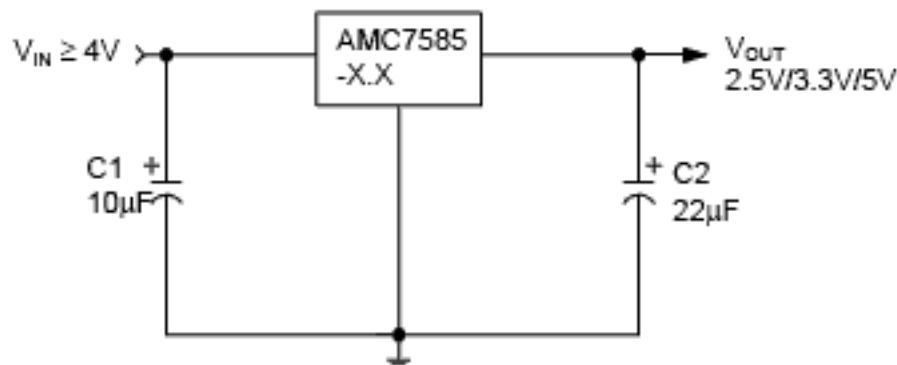

AMC7585-X.X application schematic

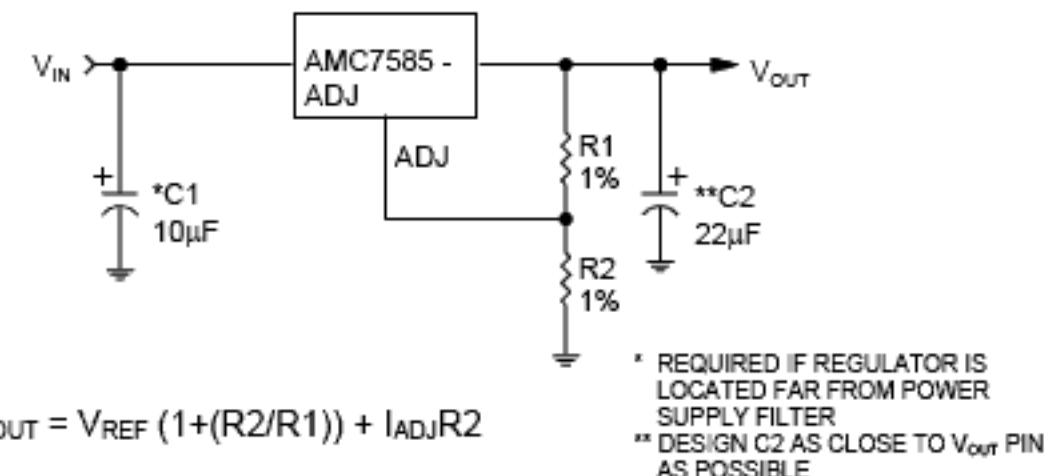

AMC7585-ADJ application schematic

AMC7585

5A Low Dropout Regulator

| ABSOLUTE MAXIMUM RATINGS (Note) | |
|---|------------------|
| Input Voltage (V_{IN}) | 7V |
| Operating Junction temperature | 150 °C |
| Storage Temperature Range | -65 °C to 150 °C |
| Lead temperature (Soldering, 10 seconds) | 300 °C |
| Note: Exceeding these ratings could cause damage to the device. All voltages are with respect to Ground. Currents are positive into, negative out of the specified terminal. | |

| POWER DISSIPATION TABLE | | | | | |
|--------------------------------|-------------------------|--|---|--------------------------------------|---------------------------------------|
| Package | θ_{JA} (°C/W) | Derating factor (mW/°C) $T_A \geq 25^\circ C$ | $T_A \leq 25^\circ C$ Power rating(mW) | $T_A=70^\circ C$ Power rating(mW) | $T_A=85^\circ C$ Power rating (mW) |
| T | 45 | 22.2 | 2775 | 1776 | 1443 |
| TF | 45 | 22.2 | 2775 | 1776 | 1443 |
| ST/ST3 | 45 | 22.2 | 2775 | 1776 | 1443 |
| ST/ST3F | 45 | 22.2 | 2775 | 1776 | 1443 |
| SJ | 80 | 12.5 | 1562 | 1000 | 812 |
| SJF | 80 | 12.5 | 1562 | 1000 | 812 |

Note: $T_J = T_A + (P_D \times \theta_{JA})$

P_D : Power dissipation.

θ_{JA} : Thermal resistance from Junction to Ambient.

For T and ST/ST3 packages, $\theta_{JT} = 3.0^\circ C / W$.

For SJ package, $\theta_{JT} = 7.0^\circ C / W$.

$$T_J = T_{TAB} + (P_D \times \theta_{JT})$$

T_{TAB} : Tab temperature.

θ_{JT} : Thermal resistance from junction to tab of the package.

1. The θ_{JA} numbers are guidelines for the thermal performance of the device/PC-board system.
2. All of the above assume no ambient airflow.
3. If power consumption is over above rating, adequate heat sink is required to dissipate heat.


| RECOMMENDED OPERATING CONDITIONS | | | | | |
|--|----------|----------------------------------|------|------|-------|
| Parameter | Symbol | Recommended Operating Conditions | | | Units |
| | | Min. | Typ. | Max. | |
| Input Voltage | V_{IN} | 2.75 | | 7 | V |
| Load Current (with adequate heatsinking) | I_o | 0.010 | | 5 | A |
| Input Capacitor (V_{IN} to GND) | | 1 | | | μF |
| Output Capacitor with ESR of 10Ω max., (V_{OUT} to GND) | | 10 | | | μF |
| Operating Ambient Temperature Range | | 0 | | 70 | °C |
| Operating junction temperature | T_J | | | 125 | °C |

AMC DOC. #: AMC7585_E (LF)


Feb 2005

AMC7585
5A Low Dropout Regulator

BLOCK DIAGRAM

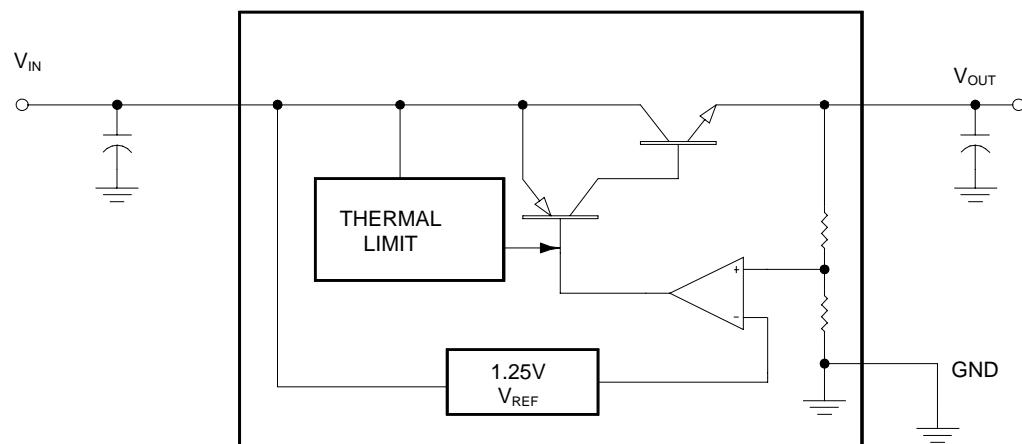

AMC7585-X.X circuit schematic

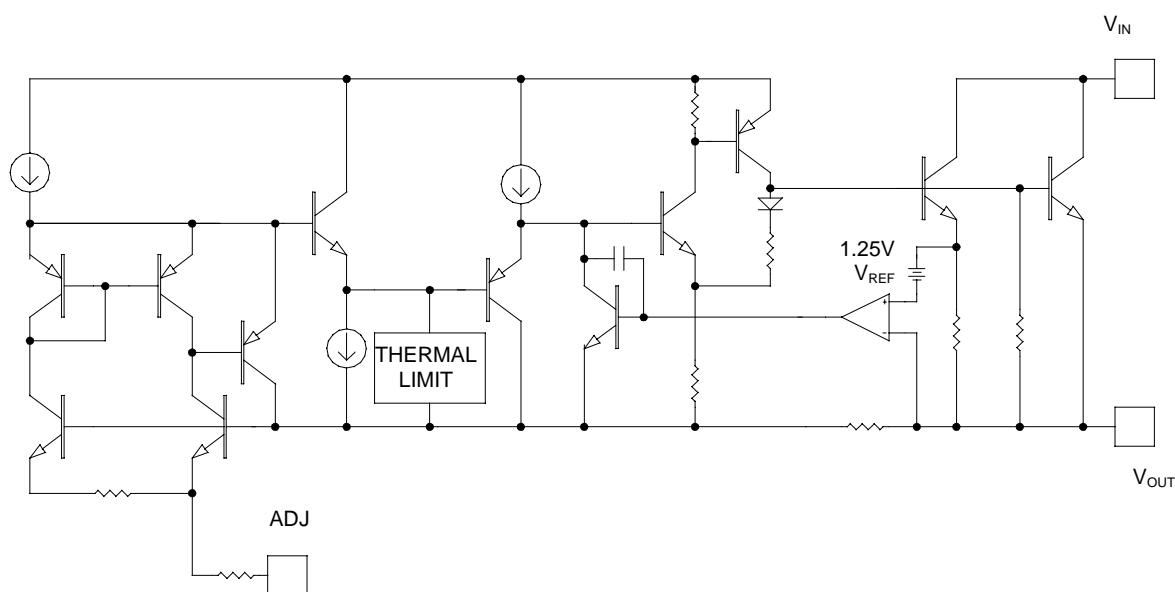

AMC7585-ADJ circuit schematic

AMC7585

5A Low Dropout Regulator

ELECTRICAL CHARACTERISTICS

Unless otherwise specified, $V_{IN} = V_{OUT} + 2V$, $I_O = 10mA$. These specifications apply operating ambient temperature range, and are for DC characteristics only. (Low duty cycle pulse testing techniques are used which maintains junction and case temperatures equal to the ambient temperature.)

| Parameter | Symbol | Test Conditions | AMC7585 | | | Units | | |
|--------------------------------------|-------------|-----------------|--|--------------|-------|-------|---------|--|
| | | | Min. | Typ. | Max. | | | |
| Output Voltage | AMC7585-2.5 | V_{OUT} | $T_A = 25^\circ C$ | 2.475 | 2.500 | 2.525 | V | |
| | AMC7585-3.3 | | $T_A = 25^\circ C$ | 3.267 | 3.300 | 3.333 | | |
| | AMC7585-5.0 | | $T_A = 25^\circ C$ | 4.950 | 5.000 | 5.050 | | |
| Output Voltage | AMC7585-2.5 | V_{OUT} | $I_O = 10mA$ to $5A$ | 2.460 | 2.500 | 2.540 | V | |
| | AMC7585-3.3 | | | 3.247 | 3.300 | 3.353 | | |
| | AMC7585-5.0 | | | 4.920 | 5.000 | 5.080 | | |
| Reference Voltage | AMC7585-ADJ | V_{REF} | (Note 1) | 1.238 | 1.250 | 1.262 | V | |
| | | | $I_O = 10mA$ to $5A$, (Note 1) | 1.230 | 1.250 | 1.270 | | |
| Line Regulation (Note 2) | | ΔV_{OI} | $(1.5V + V_{OUT}) \leq V_{IN} \leq 7V$ | | 0.04 | 0.2 | % | |
| Load regulation (Note 2) | | ΔV_{OL} | $I_O = 10mA$ to $5A$ | | 0.08 | 0.3 | % | |
| Dropout Voltage | | ΔV | (Note 3) | $I_O = 10mA$ | 1.00 | 1.15 | V | |
| | | | | $I_O = 5A$ | 1.15 | 1.30 | | |
| Quiescent Current (for AMC7585-X.X) | | I_Q | $V_{IN} \leq 7V$, $I_O = 10mA$ to $3A$ | | 8 | 13 | mA | |
| Adjust Pin Current (for AMC7585-ADJ) | | I_{ADJ} | | | 50 | 120 | μA | |
| Current Limit | | I_{CL} | $(V_{IN} - V_{OUT})=2V$ | 5.1 | 6.8 | | A | |
| Minimum Load Current (Note 4) | | I_{min} | | | 5 | 10 | mA | |
| Ripple Rejection (Note 5) | | R_R | $V_{RIPPLE} = 1V_{PP}$, $I_O = 100mA$, $f_O=120Hz$ | 60 | 80 | | dB | |

Note 1 Output voltage is set to be 2.5V.

Note 2: Line and load regulations are guaranteed up to maximum power dissipation determined by input/output differential and the output current. However, the maximum power will not be available over the full input/output voltage range.

Note 3: The specifications represent the minimum input/output voltage required to maintain 1% regulation.


Note 4: The minimum load current is the minimum current required to maintain regulation. Normally the current in the resistor divider used to set the output voltage is selected to meet the minimum load current requirement.

Note 5: These parameters, although guaranteed, are not tested in production prior to shipment


CHARACTERIZATION CURVES

$C_{IN}=10\mu F$, $C_{OUT}=22\mu F$, $T_A=25^\circ C$, unless otherwise specified.


Load Regulation

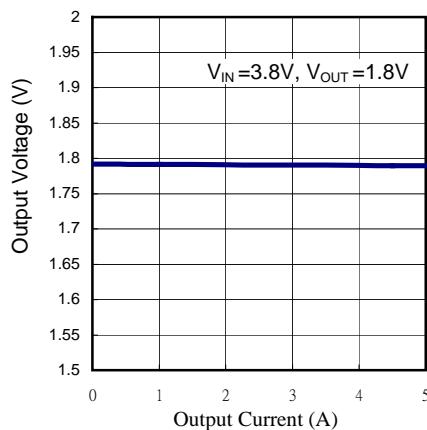


Load Regulation

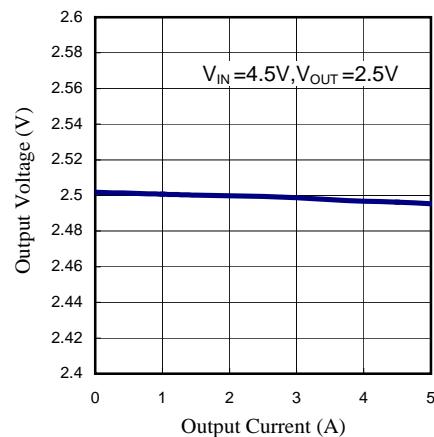


Load Regulation

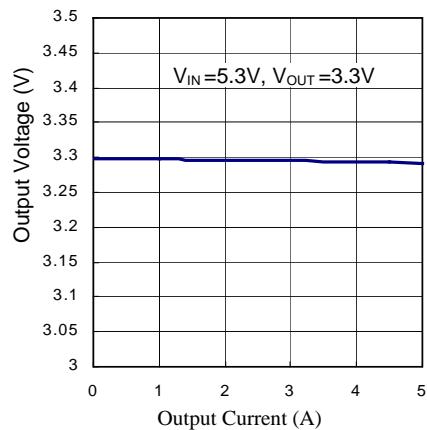


Load Regulation

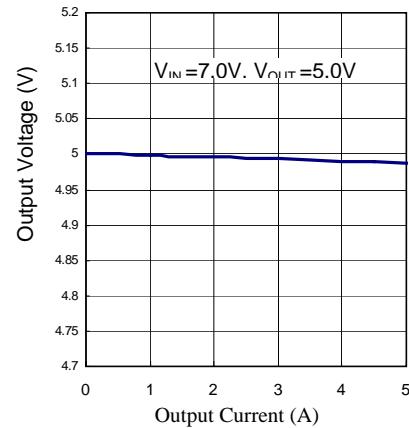

**Output Voltage v.s.
Temperature**

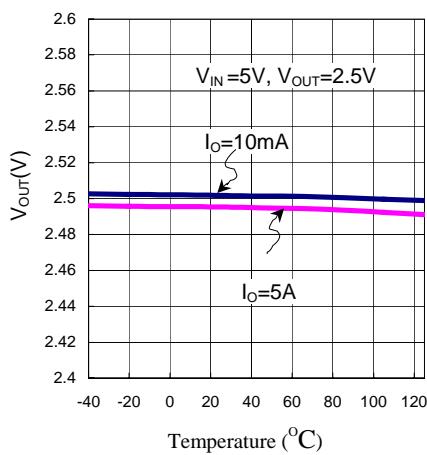

**Quiescent Current vs.
Temperature**

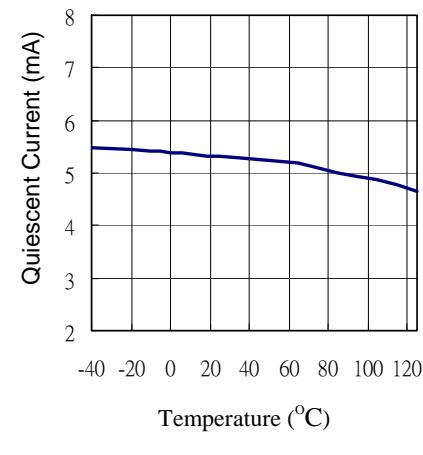

Application Note:**The maximum power dissipation of a single-output regulator:**

$$P_{D(MAX)} = [(V_{IN(MAX)} - V_{OUT(NOM)})] \times I_{OUT(NOM)} + V_{IN(MAX)} \times I_Q$$

$V_{OUT(NOM)}$ = the nominal output voltage

$I_{OUT(NOM)}$ = the nominal output current, and

I_Q = the quiescent current the regulator consumes at $I_{OUT(MAX)}$

$V_{IN(MAX)}$ = the maximum input voltage

Thermal consideration:

The AMC7585 series have internal power and thermal limiting circuitry designed to protect the device under overload conditions. However maximum junction temperature ratings should not be exceeded under continuous normal load conditions. The thermal protection circuit of AMC7585 series will prevent the device from damage due to excessive power dissipation. When the device temperature rises to approximately 150°C, the regulator will be turned off.

When power consumption is over about 1.2W (for TO-220/ TO-263 package, 687mW for TO-252 package, at $T_A=70$ °C), additional heat sink is required to control the junction temperature below 125°C.

The junction temperature is: $T_J = P_D (\theta_{JT} + \theta_{CS} + \theta_{SA}) + T_A$

P_D : Dissipated power.

θ_{JT} : Thermal resistance from the junction to the mounting tab of the package.

θ_{CS} : Thermal resistance through the interface between the IC and the surface on which it is mounted.


(typically, $\theta_{CS} < 1.0$ °C / W)

θ_{SA} : Thermal resistance from the mounting surface to ambient (thermal resistance of the heat sink).


If PC Board copper is going to be used as a heat sink, below table can be used to determine the appropriate size of copper foil required. For multi-layered PCB, these layers can also be used as a heat sink. They can be connected with several through hole vias.

| | | | | | | | |
|---------------------------------------|-----|------|------|------|------|------|------|
| PCB θ_{SA} (°C / W) | 59 | 45 | 38 | 33 | 27 | 24 | 21 |
| PCB heat sink size (mm ²) | 500 | 1000 | 1500 | 2000 | 3000 | 4000 | 5000 |

Recommended figure of PCB area used as a heat sink.



(Top View)



(Bottom View)


AMC DOC. #: AMC7585_E (LF)

Feb 2005

AMC7585


5A Low Dropout Regulator

3-Pin Plastic TO-220 (T)

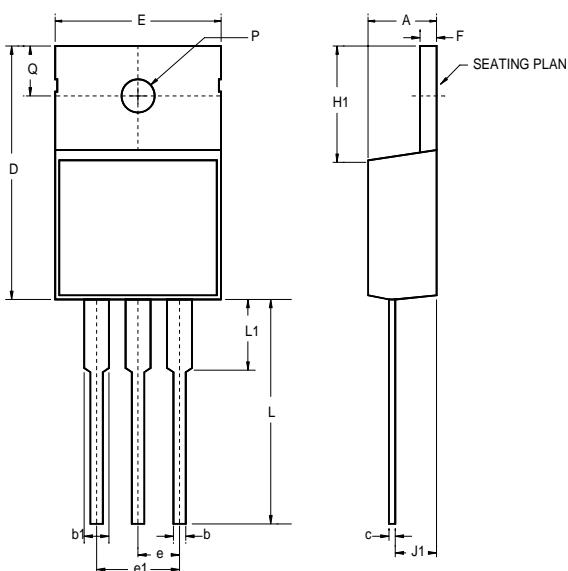

| | INCHES | | | MILLIMETERS | | |
|----|--------|-----|-------|-------------|-----|-------|
| | MIN | TYP | MAX | MIN | TYP | MAX |
| A | 0.140 | - | 0.190 | 3.56 | - | 4.83 |
| b1 | 0.045 | - | 0.070 | 1.14 | - | 1.78 |
| b | 0.020 | - | 0.045 | 0.51 | - | 1.14 |
| c | 0.012 | - | 0.045 | 0.30 | - | 1.14 |
| D | 0.560 | - | 0.650 | 14.22 | - | 16.51 |
| E | 0.380 | - | 0.420 | 9.65 | - | 10.67 |
| e | 0.090 | - | 0.110 | 2.29 | - | 2.79 |
| e1 | 0.190 | - | 0.210 | 4.83 | - | 5.33 |
| F | 0.020 | - | 0.055 | 0.51 | - | 1.40 |
| H1 | 0.230 | - | 0.270 | 5.84 | - | 6.86 |
| J1 | 0.080 | - | 0.115 | 2.03 | - | 2.92 |
| L | 0.500 | - | 0.580 | 12.7 | - | 14.73 |
| P | 0.139 | - | 0.161 | 3.53 | - | 4.09 |
| Q | 0.100 | - | 0.135 | 2.54 | - | 3.43 |
| L1 | - | - | 0.250 | - | - | 6.35 |

3-Pin Surface Mount TO-263 (ST)

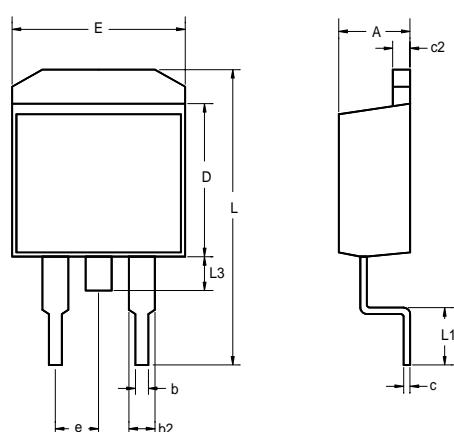

| | INCHES | | | MILLIMETERS | | |
|----|------------|-----|-------|-------------|-----|-------|
| | MIN | TYP | MAX | MIN | TYP | MAX |
| A | 0.160 | - | 0.190 | 4.06 | - | 4.83 |
| b | 0.020 | - | 0.039 | 0.51 | - | 0.99 |
| b2 | 0.045 | - | 0.055 | 1.14 | - | 1.40 |
| c | 0.015 TYP. | | | 0.38 TYP. | | |
| c2 | 0.045 | - | 0.055 | 1.14 | - | 1.40 |
| D | 0.340 | - | 0.380 | 8.64 | - | 9.65 |
| E | 0.380 | - | 0.405 | 9.65 | - | 10.29 |
| e | 0.100 BSC | | | 2.54 BSC | | |
| L | 0.575 | - | 0.625 | 14.61 | - | 15.88 |
| L1 | 0.090 | - | 0.110 | 2.29 | - | 2.79 |
| L2 | - | - | 0.115 | - | - | 2.92 |
| L3 | 0.050 | - | 0.070 | 1.27 | - | 1.78 |


AMC DOC. #: AMC7585_E (LF)

Feb 2005

AMC7585


5A Low Dropout Regulator

3-Pin Surface Mount TO-263 (ST3)

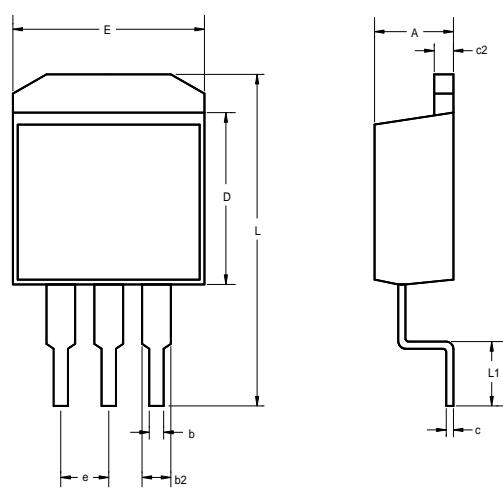

| | INCHES | | | MILLIMETERS | | |
|----|------------|-----|-------|-------------|-----|-------|
| | MIN | TYP | MAX | MIN | TYP | MAX |
| A | 0.160 | - | 0.190 | 4.06 | - | 4.83 |
| b | 0.020 | - | 0.039 | 0.51 | - | 0.99 |
| b2 | 0.045 | - | 0.055 | 1.14 | - | 1.40 |
| c | 0.015 TYP. | | | 0.38 TYP. | | |
| c2 | 0.045 | - | 0.055 | 1.14 | - | 1.40 |
| D | 0.340 | - | 0.380 | 8.64 | - | 9.65 |
| E | 0.380 | - | 0.405 | 9.65 | - | 10.29 |
| e | 0.100 BSC | | | 2.54 BSC | | |
| L | 0.575 | - | 0.625 | 14.61 | - | 15.88 |
| L1 | 0.090 | - | 0.110 | 2.29 | - | 2.79 |
| L2 | - | - | 0.115 | - | - | 2.92 |

3-Pin Surface Mount TO-252 (SJ)

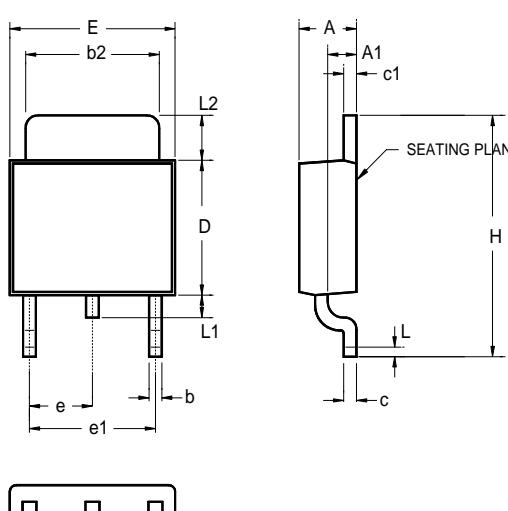

| | INCHES | | | MILLIMETERS | | |
|----|-----------|-------|-------|-------------|------|-------|
| | MIN | TYP | MAX | MIN | TYP | MAX |
| A | 0.086 | - | 0.094 | 2.18 | - | 2.39 |
| A1 | 0.040 | - | 0.050 | 1.02 | - | 1.27 |
| b | - | 0.024 | - | - | 0.61 | - |
| b2 | 0.205 | - | 0.215 | 5.21 | - | 5.46 |
| c | 0.018 | - | 0.023 | 0.46 | - | 0.58 |
| c1 | 0.018 | - | 0.023 | 0.46 | - | 0.58 |
| D | 0.210 | - | 0.220 | 5.33 | - | 5.59 |
| E | 0.250 | - | 0.265 | 6.35 | - | 6.73 |
| e | 0.090 BSC | | | 2.29 BSC | | |
| e1 | 0.180 BSC | | | 4.58 BSC | | |
| H | 0.370 | - | 0.410 | 9.40 | - | 10.41 |
| L | 0.020 | - | - | 0.51 | - | - |
| L1 | 0.025 | - | 0.040 | 0.64 | - | 1.02 |
| L2 | 0.060 | - | 0.080 | 1.52 | - | 2.03 |

AMC DOC. #: AMC7585_E (LF)
Feb 2005

AMC7585

5A Low DROPOUT REGULATOR

IMPORTANT NOTICE

ADD Microtech (ADDM) reserves the right to make changes to its products or to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

A few applications using integrated circuit products may involve potential risks of death, personal injury, or severe property or environmental damage. ADDM integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life-support applications, devices or systems or other critical applications. Use of ADDM products in such applications is understood to be fully at the risk of the customer. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

ADDM assumes no liability to customer product design or application support. ADDM warrants the performance of its products to the specifications applicable at the time of sale.

U.S.
ADD Microtech Inc.
492 Altamont Drive
Milpitas, CA 95035
TEL: (408) 9410420
FAX: (408) 9410864

Asia Pacific region
ADD Microtech Corp
13F, NO. 287, Sec. 3, Nan Jing E. Rd.,
Taipei, Taiwan 105
TEL: 2-27132800
FAX: 2-27132805