MOTOROLA SEMICONDUCTOR TECHNICAL DATA

Hex D Master-Slave Flip-Flop with Reset

The MC10H186 is a hex D type flip–flop with common reset and clock lines. This MECL 10H part is a functional/pinout duplication of the standard MECL 10K family part, with 100% improvement in clock toggle frequency and propagation delay and no increase in power–supply current.

- Propagation Delay, 1.7 ns Typical
- Power Dissipation, 460 mW Typical
- Improved Noise Margin 150 mV (Over Operating Voltage and Temperature Range)
- Voltage Compensated
- MECL 10K–Compatible

MAXIMUM RATINGS

Characteristic	Symbol	Rating	Unit
Power Supply ($V_{CC} = 0$)	VEE	-8.0 to 0	Vdc
Input Voltage (V _{CC} = 0)	VI	0 to V _{EE}	Vdc
Output Current — Continuous — Surge	lout	50 100	mA
Operating Temperature Range	TA	0 to +75	°C
Storage Temperature Range — Plastic — Ceramic	T _{stg}	–55 to +150 –55 to +165	°C °C

ELECTRICAL CHARACTERISTICS (V_{EE} = -5.2 V ±5%) (See Note)

		0 °		25°		75°		
Characteristic	Symbol	Min	Max	Min	Max	Min	Max	Unit
Power Supply Current	١ _E	—	121	—	110	—	121	mA
Input Current High Pins 5,6,7,10,11,12 Pin 9 Pin 1	linH	 	430 670 1250		265 420 765	Ξ	265 420 765	μΑ
Input Current Low	I _{inL}	0.5		0.5	-	0.3	E	μA
High Output Voltage	VOH	-1.02	-0.84	-0.98	-0.81	-0.92	-0.735	Vdc
Low Output Voltage	VOL	-1.95	-1.63	-1.95	-1.63	-1.95	-1.60	Vdc
High Input Voltage	VIH	-1.17	-0.84	-1.13	-0.81	-1.07	-0.735	Vdc
Low Input Voltage	VIL	-1.95	-1.48	-1.95	-1.48	-1.95	-1.45	Vdc

AC PARAMETERS

	_	_	_			_		
Propagation Delay	^t pd	0.7	3.0	0.7	3.0	0.7	3.0	ns
Set–up Time	tset	1.5	_	1.5	I	1.5	—	ns
Hold Time	^t hold	1.0	—	1.0		1.0	-	ns
Rise Time	tr	0.7	2.6	0.7	2.6	0.7	2.6	ns
Fall Time	t _f	0.7	2.6	0.7	2.6	0.7	2.6	ns
Toggle Frequency	f _{tog}	250	1-2	250	1	250		MHz
Reset Recovery Time (t ₁₋₉₊)	t _{rr}	3.0	0.6	3.0	C.T	3.0	_	ns

NOTE:

Each MECL 10H series circuit has been designed to meet the dc specifications shown in the test table, after thermal equilibrium has been established. The circuit is in a test socket or mounted on a printed circuit board and transverse air flow greater than 500 linear fpm is maintained. Outputs are terminated through a 50–ohm resistor to –2.0 volts.








CLOCKED INOTH TABLE						
R	С	D	Qn+1			
L	L	Х	Qn			
L	Н*	L	L			

L	Η*	L	L
L	Η*	Н	Н
Н	L	Х	
_	27	· W	COM

* A clock H is a clock transition from a low to a high state.

DIP PIN ASSIGNMENT




Pin assignment is for Dual–in–Line Package. For PLCC pin assignment, see the Pin Conversion Tables on page 6–11 of the Motorola MECL Data Book (DL122/D).




APPLICATION INFORMATION

The MC10H186 contains six high-speed, master slave type "D" flip-flops. Data is entered into the master when the clock is low. Master-to-slave data transfer takes place on the positive-going Clock transition. Thus outputs may change only on a positive-going Clock transition. A change in the information present at the data (D) input will not affect the output information any other time due to the master–slave construction of this device. A common Reset is included in this circuit. **THE RESET ONLY FUNCTIONS WHEN THE CLOCK IS LOW.**

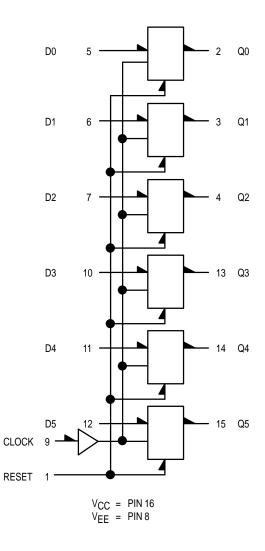


LOGIC DIAGRAM

OUTLINE DIMENSIONS

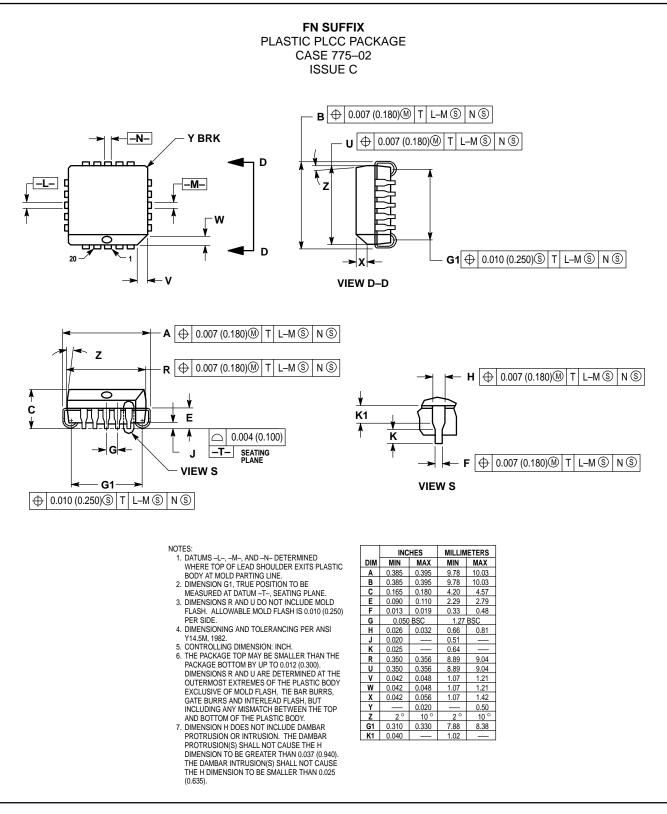

MC10H186

OUTLINE DIMENSIONS

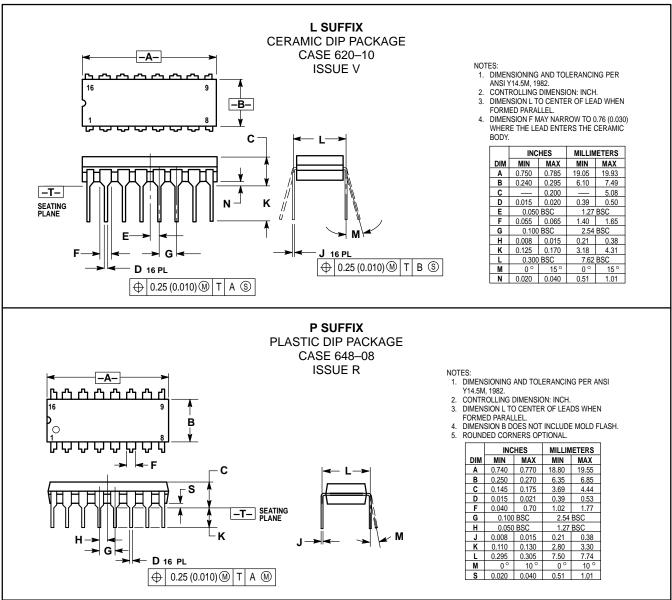

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters which may be provided in Motorola data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and **()** are registered trademarks of Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

How to reach us:

USA/EUROPE/Locations Not Listed: Motorola Literature Distribution; P.O. Box 20912; Phoenix, Arizona 85036. 1–800–441–2447 or 602–303–5454

MFAX: RMFAX0@email.sps.mot.com - TOUCHTONE 602-244-6609 INTERNET: http://Design-NET.com JAPAN: Nippon Motorola Ltd.; Tatsumi–SPD–JLDC, 6F Seibu–Butsuryu–Center, 3–14–2 Tatsumi Koto–Ku, Tokyo 135, Japan. 03–81–3521–8315

ASIA/PACIFIC: Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park, 51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852–26629298

