



1SS390


SURFACE MOUNT PIN DIODE

VOLTAGE	35 Volts	POWER	200 mW
----------------	-----------------	--------------	---------------

SOD-523	Unit: inch (mm)
----------------	-------------------

FEATURES

- Very low series resistance at 100MHz (0.45 Ω typical@I_r=2mA)
- Low capacitance (0.8pF typical@V_r=6V)
- Surface mount package ideally suited for automatic insertion
- Pb free product are available : 99% Sn above can meet RoHS environment substance directive request

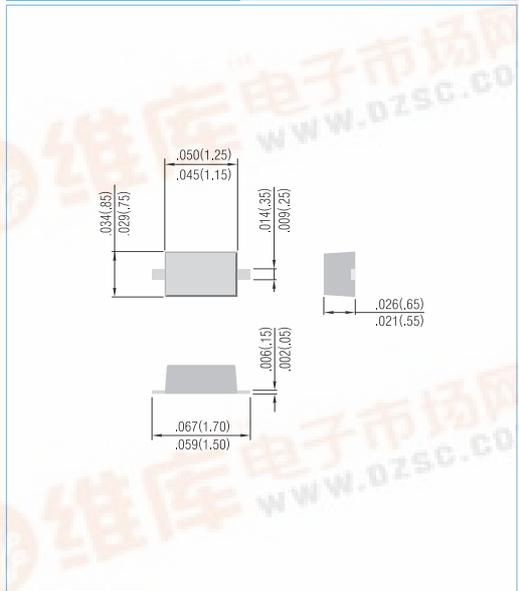

MECHANICAL DATA

- Case: SOD-523 plastic
- Terminals : Solderable per MIL-STD-750,Method 2026
- Approx Weight: 0.002 grams
- Device Marking : 390

ABSOLUTE RATINGS

Parameter	Symbol	Value	Units
Maximum Reverse Voltage	V _R	35	V
Continuous Forward Current	I _F	0.2	A

THERMAL CHARACTERISTICS

Parameter	Symbol	Value	Units
Power Dissipation (Note 1)	P _{TOT}	200	mW
Thermal Resistance, Junction to Ambient (Note 1)	R _{θJA}	625	°C / W
Junction Temperature	T _J	-55 to 150	°C
Storage Temperature	T _{STG}	-55 to 150	°C

Note 1 : FR-5 Board 1.0 x 0.75 x 0.062 in.









1SS390


ELECTRICAL CHARACTERISTICS (T_J=25°C, unless otherwise noted)

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Reverse Breakdown Voltage	V _(BR)	I _R =10μA	35	-	-	V
Reverse Current	I _R	V _R =25V	-	-	10	nA
Series Resistance	R _S	I _F =2mA, f=100MHz	-	0.45	0.9	Ω
Total Capacitance	C _T	V _R =6V, f=1MHz	-	-	1.2	pF

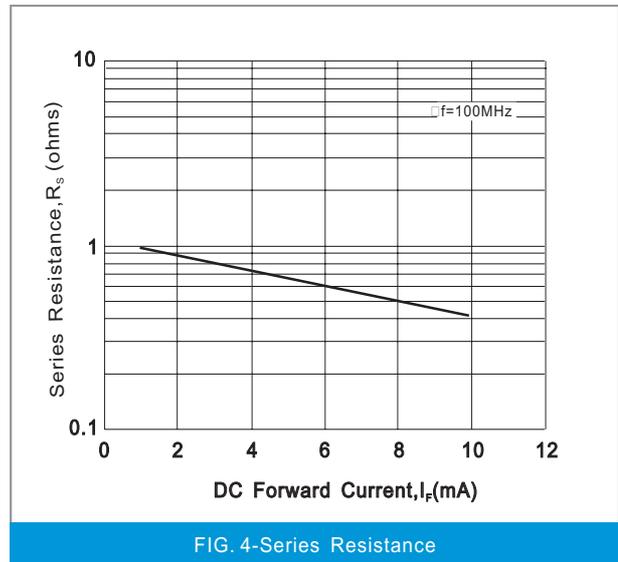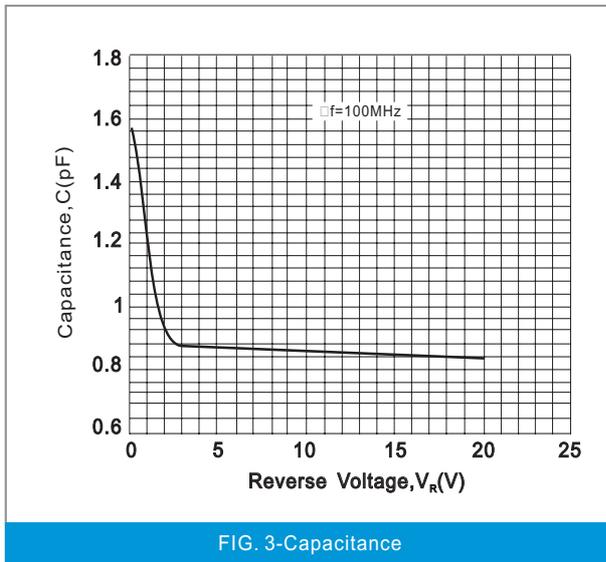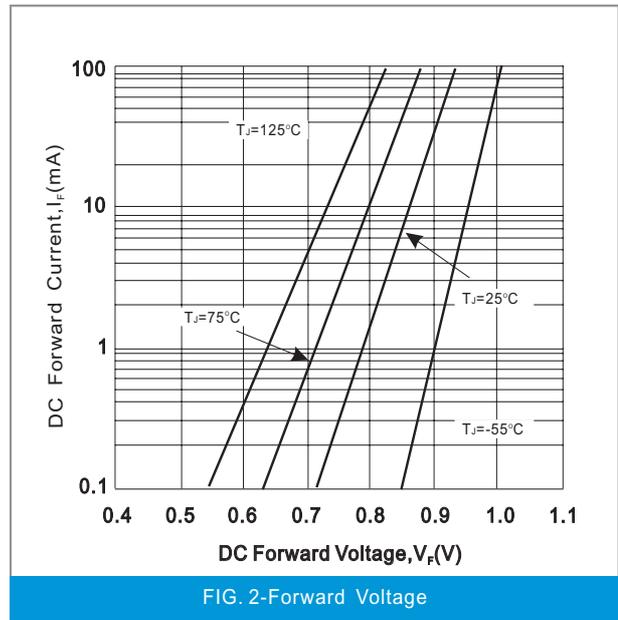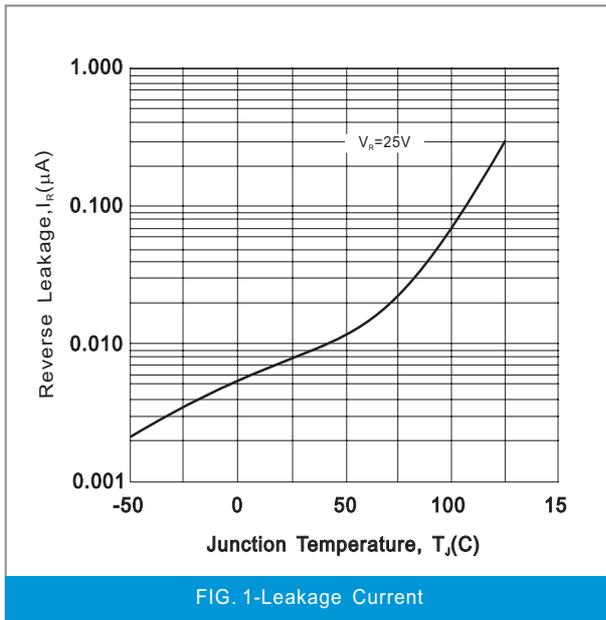



MOUNTING PAD LAYOUT

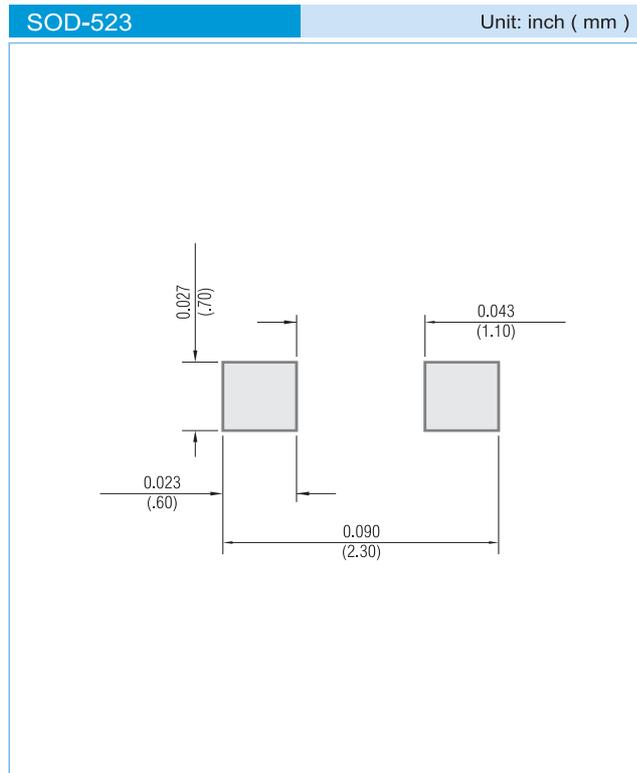

ORDER INFORMATION

- Packing information
 - T/R - 12K per 13" plastic Reel
 - T/R - 5K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2006

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.