

TOSHIBA TRANSISTOR SILICON NPN TRIPLE DIFFUSED TYPE

2SC3376

SWITCHING REGULATOR AND HIGH VOLTAGE SWITCHING APPLICATIONS.

INDUSTRIAL APPLICATIONS


Unit in mm

HIGH SPEED DC-DC CONVERTER APPLICATIONS.

- Excellent Switching Times ($I_C=0.8A$)
: $t_r=1.0\mu s$ (Max.), $t_f=1.0\mu s$ (Max.)
- High Collector-Emitter Breakdown Voltage : $V_{CEO}=800V$

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		V_{CBO}	900	V
Collector-Emitter Voltage		V_{CEO}	800	V
Emitter-Base Voltage		V_{EBO}	7	V
Collector Current	DC	I_C	3	A
	Pulse	I_{CP}	5	
Base Current		I_B	1	A
Collector Power Dissipation ($T_c=25^\circ C$)		P_C	60	W
Junction Temperature		T_j	150	$^\circ C$
Storage Temperature Range		T_{stg}	-55~150	$^\circ C$

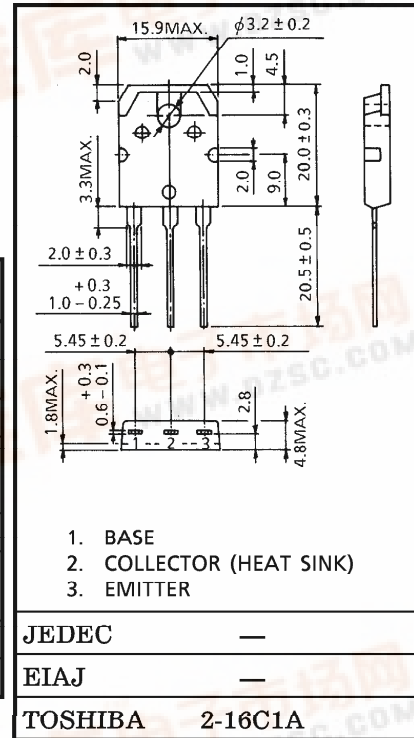

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

Weight : 4.7g

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		I_{CBO}	$V_{CB}=800V, I_E=0$	—	—	100	μA
Emitter Cut-off Current		I_{EBO}	$V_{EB}=7V, I_C=0$	—	—	1	mA
Collector-Base Breakdown Voltage		$V_{(BR)CBO}$	$I_C=1mA, I_E=0$	900	—	—	V
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C=10mA, I_B=0$	800	—	—	V
DC Current Gain		h_{FE}	$V_{CE}=5A, I_C=0.8A$	10	—	—	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C=0.8A, I_B=0.16A$	—	—	0.6	V
Base-Emitter Saturation Voltage		$V_{BE(sat)}$	$I_C=0.8A, I_B=0.16A$	—	—	1.2	V
Switching Time	Rise Time	t_r	<p>$I_{B1}=0.08A$ $I_{B2}=-0.20A$ DUTY CYCLE $\leq 1\%$</p>	—	—	1.0	μs
	Storage Time	t_{stg}		—	—	4.0	
	Fall Time	t_f		—	—	1.0	

961001EAA2

TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.



