


图中公式：除注明外均为±0.25
Tolerance is ± 0.25 if no identification

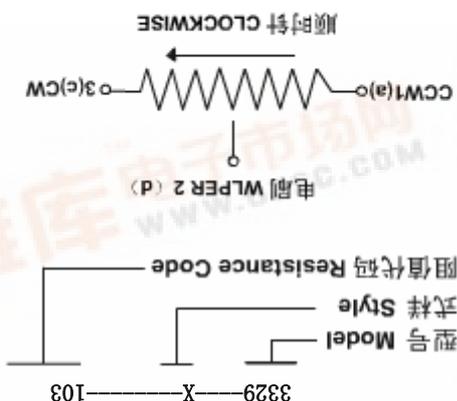


How To Order

- $\Delta R \leq 10\%R, CRV \leq 3\%$ or 5Ω
- Rotational Life.....200cycles
-1000h, $\Delta R \leq 10\%R, CRV \leq 3\%$ or 5Ω
- Electrical Endurance at 70°C.....0.5W@70°C
- Collision.....390m/s², 4000cycles, $\Delta R \leq 5\%R$
- $\Delta R \leq 5\%R, \Delta(Uab/Uac) \leq 7.5\%R$
- Vibration.....10~500Hz, 0.75mm, 6h
- $\Delta R \leq 5\%R, \Delta(Uab/Uac) \leq 5\%$
-30min 5cycles
- Temperature Variation.....-55°C, 30min, +125°C
- Temperature Coefficient.....±250ppm/°C
- 125°C
- Temperature Range.....-55°C~
-0.25W@70°C, 0W@125°C
- Power Rating, 300 volts max
- Environmental Characteristics
- Effective Travel.....280°
- Withstand Voltage.....500Vac
- (100Vac)
- Insulation Resistance..... $R1 \geq 1G\Omega$
- Contact Resistance Variation..... $CRV \leq 3\%$
- 10Ω
- Absolute Minimum Resistance..... $\leq 1\%$ 或
- Resistance Tolerance.....±10%
- 2MΩ
- Standard Resistance Range.....50Ω~
- Electrical Characteristics


Special resistances available

205	2,000,000
105	1,000,000
504	500,000
254	250,000
204	200,000
104	100,000
503	50,000
253	25,000
203	20,000
103	10,000
502	5,000
202	2,000
102	1,000
501	500
201	200
101	100
500	50
200	20
100	10

Standard Resistance Table

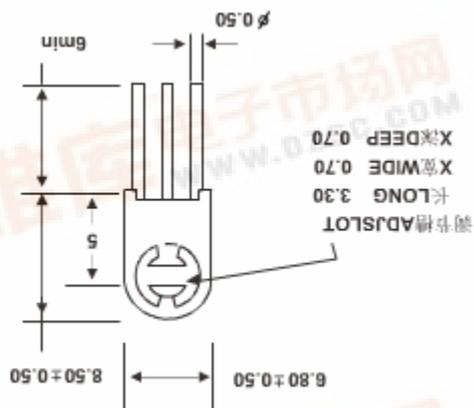

..... Mutual dimension

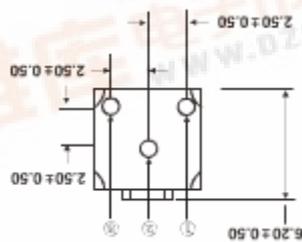

..... Install dimension

6.8x4.7 Circularity/ Single Turn /Trimming Potentiometer

-- 3329X--

3329X

