

SERIES 800A SWITCHES

SEALED SUB-MINIATURE PUSHBUTTON SWITCHES




SPECIFICATIONS


Ratings: 1A @ 120 VAC
 Electrical Life: 50,000 cycles typical
 Contact Resistance: 10mΩ max. typical @ 2-4 VDC
 100mA for both silver and gold plated contacts.
 Insulation Resistance: 1,000MΩ min.
 Dielectric Strength: 1,000 V rms @ sea level.
 Operating Force: 200 ± 50 gf

MATERIALS

Case: Diallyl Phthalate (DAP)
 Plunger: Glass filled nylon or glass filled polyester
 Bushing: Nickel plated brass
 Housing: Stainless steel
 Contacts: Silver or Gold plated copper alloy.


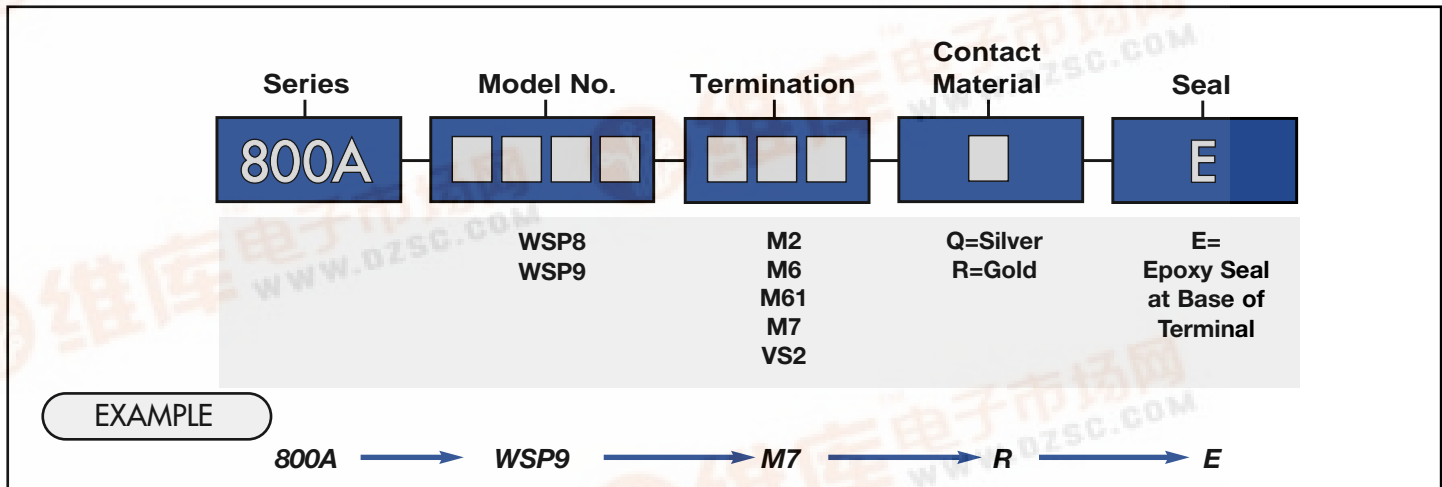


SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.




Model No.	TYPE	
WSP8	ON	(ON)
WSP9	OFF	(ON)

Schematic () = Momentary

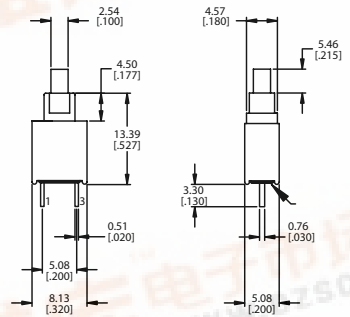



P.C. MOUNTING



TERMINATION OPTIONS

M2 P.C. Mounting

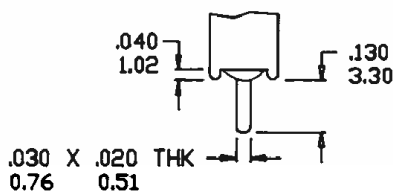







SERIES 800A SWITCHES

SEALED SUB-MINIATURE PUSHBUTTON SWITCHES


TERMINATION CONTINUED





M6
SPST

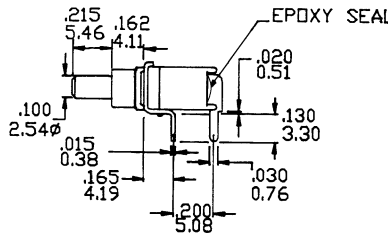



P.C. MOUNTING






M61
SPST

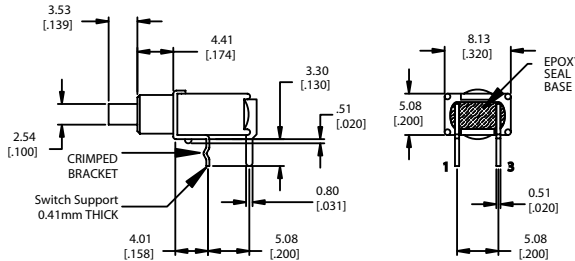


P.C. MOUNTING





M7
SPST

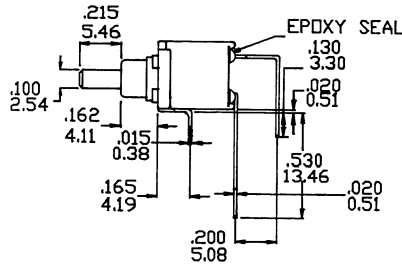


P.C. MOUNTING



VS-2
SPST



P.C. MOUNTING



CONTACT MATERIAL OPTIONS

Q
Fixed Terminal: Silver plated copper alloy.
Moving Contacts Silver plated copper alloy.
Rating: 1 AMP @ 120VAC or 28 VDC.

R
Fixed Terminal: Copper alloy with gold plate over nickel plate.
Moving Contact: Copper alloy with gold plate over nickel plate.
Rating: 0.4 VA max. @ 20 VAC or DC max.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.