



How To Order

- Temperature Coefficient.....±250ppm/°C
 - Temperature Variation.....-55°C,30min,+125°C
 -30min 5cycles
 - $\Delta R \leq 5\%R, \Delta(Uab/Uac) \leq 5\%$
 - Vibration.....10~500Hz,0.75mm,6h
 - $\Delta R \leq 5\%R, \Delta(Uab/Uac) \leq 7.5\%R$
 - Collision.....390m/s²,400cycles, $\Delta R \leq 5\%R$
 - Electrical Endurance at 70°C.....0.5W@70°C
 -1000h, $\Delta R \leq 10\%R, CRV \leq 3\%$ or 5Ω
 - Rotational Life.....200cycles
 - $\Delta R \leq 10\%R, CRV \leq 3\%$ or 5Ω
- Environmental Characteristics
- Power Rating, 300 volts max
 -0.25W@70°C,0W@125°C
 - Temperature Range.....-55°C~125°C
- Electrical Characteristics
- Standard Resistance Range.....50Ω~2MΩ
 - Resistance Tolerance.....±10%
 - Absolute Minimum Resistance..... $\leq 1\%R$ 或10Ω
 - Contact Resistance Variation.....CRV $\leq 3\%$
 - Insulation Resistance.....R1 $\geq 1G\Omega$ (100Vac)
 - Withstand Voltage.....500Vac
 - Effective Travel.....280°

Resistance Code	Resistance (Ohms)
100	10
200	20
500	50
101	100
201	200
501	500
102	1,000
202	2,000
502	5,000
103	10,000
203	20,000
503	50,000
104	100,000
204	200,000
504	500,000
105	1,000,000
205	2,000,000

Standard Resistance Table

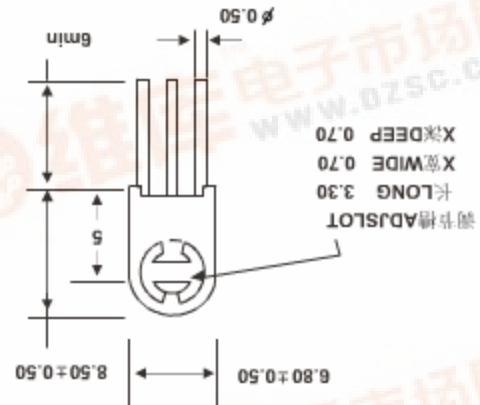

... Install dimension

-- 3329H --

6.8x4.7 Circularity/ Single Turn /Trimming Potentiometer

3329H

