




9.6×9.6 Square/ Single Turn /Trimming Potentiometer -- 3386W--

..... Mutual dimension.....

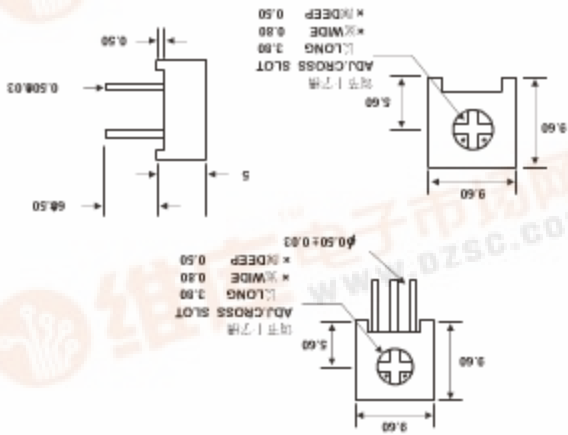


Standard Resistance Table

Resistance Code Resistance (Ohms)

100	10
200	20
500	50
101	100
201	200
501	500
102	1,000
202	2,000
502	5,000
103	10,000
203	20,000
503	50,000
104	100,000
204	200,000
504	500,000
105	1,000,000
205	2,000,000

Special resistances available

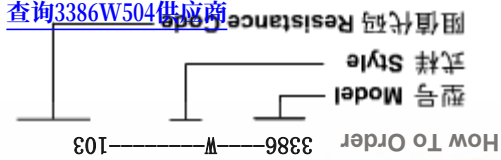

Electrical Characteristics	
Standard Resistance Range.....	50Ω~2MΩ
Resistance Tolerance.....	±10%
Absolute Minimum Resistance.....	≤1%R或10Ω
Contact Resistance Variation.....	CRV≤3%
Insulation Resistance.....	R1≥1GΩ
(100Vac)	
Withstand Voltage.....	600Vac
Effective Travel.....	300°
Environmental Characteristics	
Power Rating, 315 volts max.....	0.5W@70°C, 0W@125°C
Temperature Range.....	-55°C~125°C
Temperature Coefficient.....	±250ppm/°C
Temperature Variation.....	55°C, 30min, +125°C
30min	
5cycles	
ΔR≤5%R, Δ(Uab/Uac)≤10%	
Collision.....	100m/s ² , 1000cycles, ΔR≤2%R
Electrical Endurance at 70°C.....	0.5W@70°C
1000h, ΔR≤10%R	
Δ(Uab/Uac)≤10%, CRV≤3% or 5Ω	
Rotational Life.....	200cycles
ΔR≤10%R, CRV≤3% or 5Ω	
Physical Characteristics	
How To Order	
3386W	
103	

查询3386W504供应商

捷多邦, 专业PCB打样工厂, 24小时加急出货