


..... Mutual dimension.

.....install dimension.....



Standard Resistance Table

Resistance (Ohms) Resistance Code

10	200
50	200
100	101
200	201
500	501
1,000	102
2,000	202
5,000	502
10,000	103
20,000	203
25,000	253
50,000	503
100,000	104
200,000	204
250,000	254
500,000	504
1,000,000	105
2,000,000	205

Special resistances available



图中公式: 除注明外均为 ± 0.25
Tolerance is ± 0.25 if no identification

捷多邦，专业PCB打样工厂，24小时加急出货

Physical Characteristics


How To Order

型号 Model
式样 Style
阻值代码 Resistance Code

3386 0 103

[查询3386U504供应商](#)

Electrical Characteristics

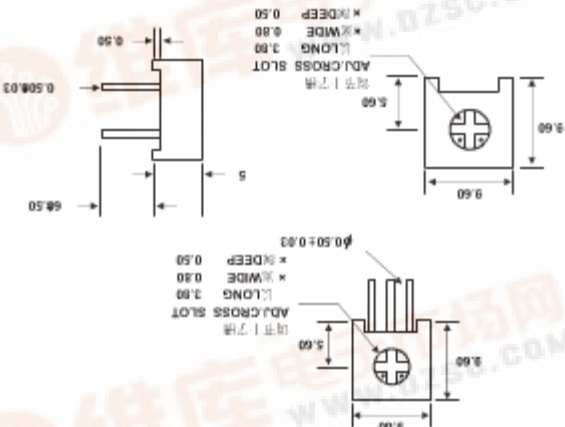

Environmental Characteristics

Power Rating, 315 volts max

FF%

125°C

Temperature Coefficient $\pm 250 \text{ ppm}/^\circ\text{C}$

Temperature Variation.....

55°C, 30 min, +125°C

.....

$$\Delta R \leq 5\%, \Delta(U_{ab}/U_{ac}) \leq 10\%$$

Collision $\cdot 100 \text{ m/s}^2 \cdot 1000 \text{ cycles} \cdot \Delta R \leq 2\% R$

Electrical Endurance at

2020.03.20.20060000

$$R_{\Delta} = 1000H, \dots$$
 $\Delta(UAB/OAC) = 10\%, CRV = 3\% \text{ OF } 552$

Rotational life 200cycles

 $\Delta R \leq 10\% R, CRV \leq 3\% \text{ or } 5\%$