



# Darlington Transistors

## PNP Silicon

**MPSA75**  
**MPSA77**



CASE 29-04, STYLE 1  
TO-92 (TO-226AA)

### MAXIMUM RATINGS

Rating	Symbol	MPSA75	MPSA77	Unit
Collector-Emitter Voltage	$V_{CES}$	-40	-60	Vdc
Emitter-Base Voltage	$V_{EBO}$	-10		Vdc
Collector Current — Continuous	$I_C$	-500		Adc
Total Device Dissipation @ $T_A = 25^\circ\text{C}$ Derate above $25^\circ\text{C}$	$P_D$	625	5.0	mW mW/ $^\circ\text{C}$
Operating and Storage Junction Temperature Range	$T_J, T_{stg}$	-55 to +150		$^\circ\text{C}$

### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	200	$^\circ\text{C}/\text{W}$

### ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)

Characteristic	Symbol	Min	Typ	Max	Unit
----------------	--------	-----	-----	-----	------

### OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage ( $I_C = -100 \mu\text{Adc}, V_{BE} = 0$ )	MPSA75 MPSA77	$V_{(BR)CES}$	-40 -60	— —	— —	Vdc
Collector-Base Breakdown Voltage ( $I_C = 100 \mu\text{Adc}, I_E = 0$ )	MPSA75 MPSA77	$V_{(BR)CBO}$	-40 -60	— —	— —	Vdc
Collector Cutoff Current ( $V_{CB} = -30 \text{ V}, I_E = 0$ ) ( $V_{CB} = -50 \text{ V}, I_E = 0$ )	MPSA75 MPSA77	$I_{CBO}$	— —	— —	-100 -100	nAdc
Collector Cutoff Current ( $V_{CE} = -30 \text{ V}, V_{BE} = 0$ ) ( $V_{CE} = -50 \text{ V}, V_{BE} = 0$ )	MPSA75 MPSA77	$I_{CES}$	— —	— —	-500 -500	nAdc
Emitter Cutoff Current ( $V_{EB} = -10 \text{ Vdc}$ )		$I_{EBO}$	—	—	-100	nAdc

### ON CHARACTERISTICS

DC Current Gain ( $I_C = -10 \text{ mA}, V_{CE} = -5.0 \text{ V}$ ) ( $I_C = -100 \text{ mA}, V_{CE} = -5.0 \text{ V}$ )		$h_{FE}$	10,000 10,000	— —	— —	—
Collector-Emitter Saturation Voltage ( $I_C = -100 \text{ mA}, I_B = -0.1 \text{ mAdc}$ )		$V_{CE(sat)}$	—	—	-1.5	Vdc
Base-Emitter On Voltage ( $I_C = -100 \text{ mA}, V_{CE} = -5.0 \text{ Vdc}$ )		$V_{BE}$	—	—	-2.0	Vdc

### SMALL-SIGNAL CHARACTERISTICS

Current-Gain — High Frequency ( $I_C = -10 \text{ mA}, V_{CE} = -5.0 \text{ V}, f = 100 \text{ MHz}$ )		$ h_{fe} $	1.25	2.4	—	—
--	--	------------	------	-----	---	---

# MPSA75 MPSA77

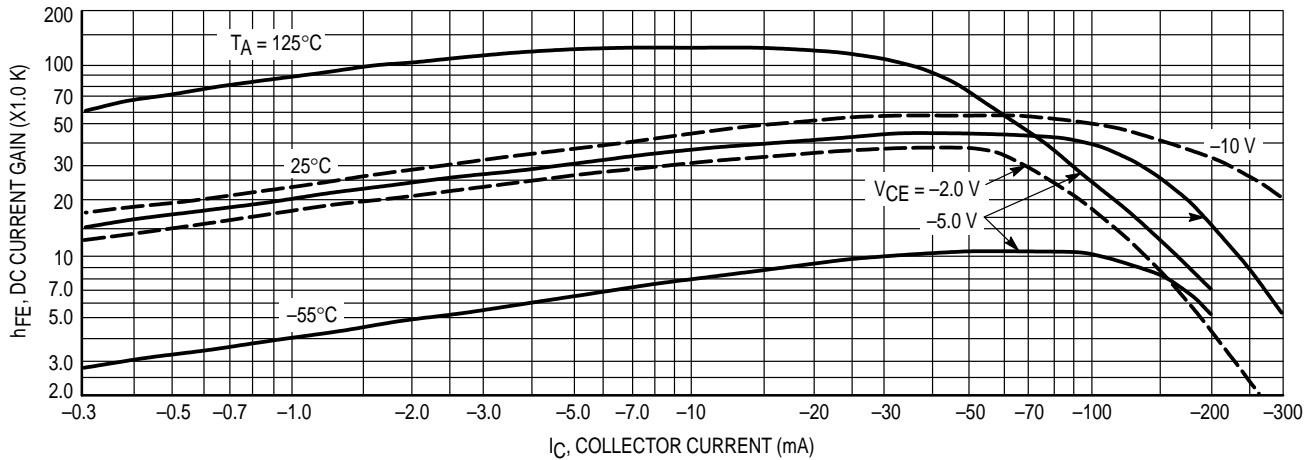


Figure 1. DC Current Gain

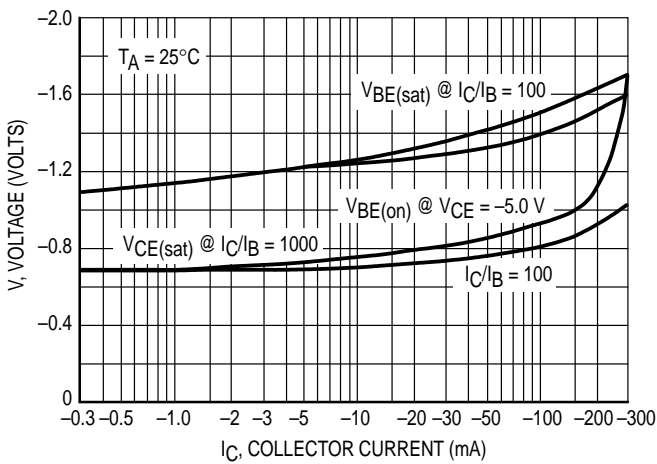


Figure 2. "On" Voltage

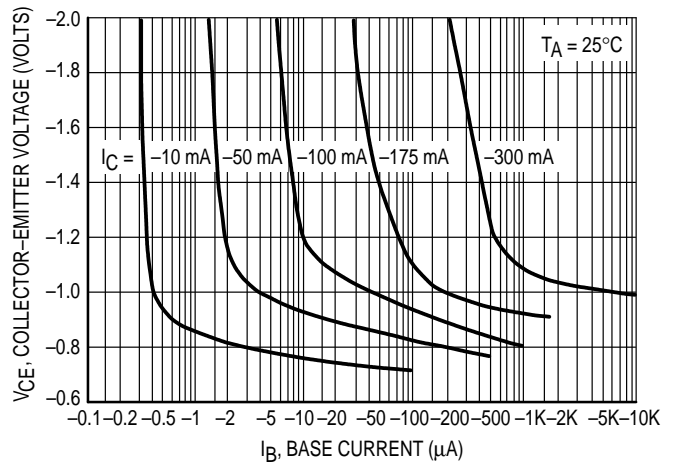


Figure 3. Collector Saturation Region

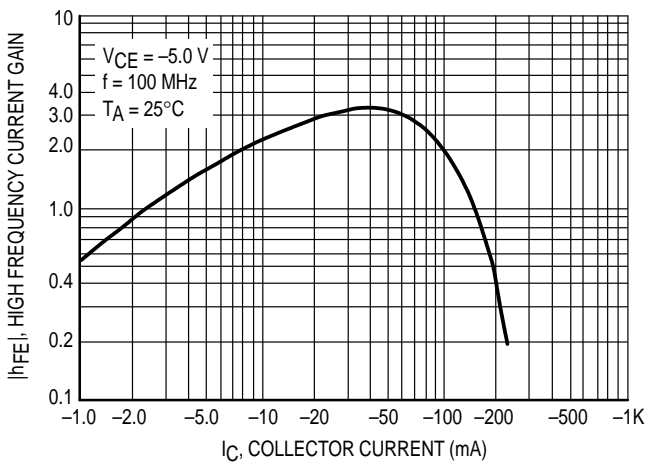


Figure 4. High Frequency Current Gain



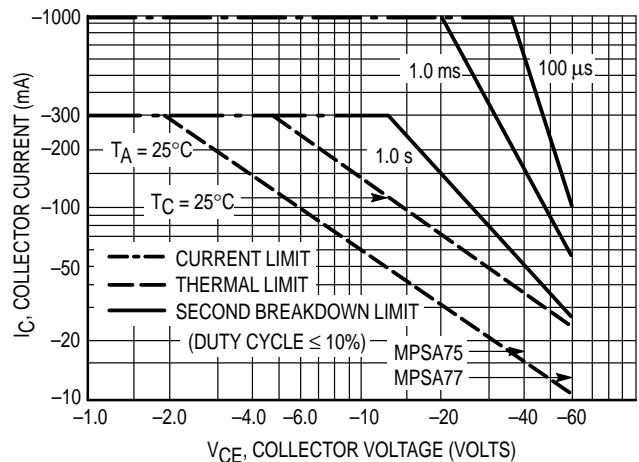


Figure 5. Active Region, Safe Operating Area

**PACKAGE DIMENSIONS**

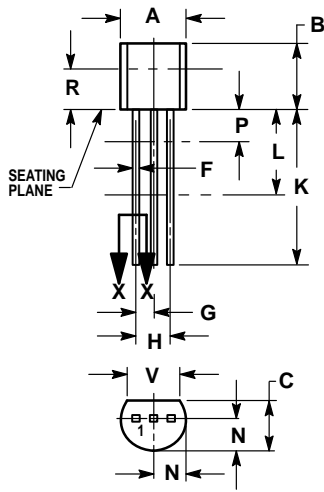

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. CONTOUR OF PACKAGE BEYOND DIMENSION R IS UNCONTROLLED.
4. DIMENSION F APPLIES BETWEEN P AND L. DIMENSION D AND J APPLY BETWEEN L AND K MINIMUM. LEAD DIMENSION IS UNCONTROLLED IN P AND BEYOND DIMENSION K MINIMUM.


DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.175	0.205	4.45	5.20
B	0.170	0.210	4.32	5.33
C	0.125	0.165	3.18	4.19
D	0.016	0.022	0.41	0.55
F	0.016	0.019	0.41	0.48
G	0.045	0.055	1.15	1.39
H	0.095	0.105	2.42	2.66
J	0.015	0.020	0.39	0.50
K	0.500	—	12.70	—
L	0.250	—	6.35	—
N	0.080	0.105	2.04	2.66
P	—	0.100	—	2.54
R	0.115	—	2.93	—
V	0.135	—	3.43	—

**CASE 029-04  
(TO-226AA)  
ISSUE AD**

**STYLE 1:**

- PIN 1. EMITTER
2. BASE
3. COLLECTOR

## MPSA75 MPSA77

Motorola reserves the right to make changes without further notice to any products herein. Motorola makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Motorola assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation consequential or incidental damages. "Typical" parameters can and do vary in different applications. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. Motorola does not convey any license under its patent rights nor the rights of others. Motorola products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the Motorola product could create a situation where personal injury or death may occur. Should Buyer purchase or use Motorola products for any such unintended or unauthorized application, Buyer shall indemnify and hold Motorola and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that Motorola was negligent regarding the design or manufacture of the part. Motorola and  are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Opportunity/Affirmative Action Employer.

### How to reach us:

**USA/EUROPE:** Motorola Literature Distribution;  
P.O. Box 20912; Phoenix, Arizona 85036. 1-800-441-2447

**JAPAN:** Nippon Motorola Ltd.; Tatsumi-SPD-JLDC, Toshikatsu Otsuki,  
6F Seibu-Butsuryu-Center, 3-14-2 Tatsumi Koto-Ku, Tokyo 135, Japan. 03-3521-8315

**MFAX:** RMFAX0@email.sps.mot.com – TOUCHTONE (602) 244-6609  
**INTERNET:** <http://Design-NET.com>

**HONG KONG:** Motorola Semiconductors H.K. Ltd.; 8B Tai Ping Industrial Park,  
51 Ting Kok Road, Tai Po, N.T., Hong Kong. 852-26629298

