# 捷多邦,专业PCB打样工厂,24小时加急出货74AC11032 QUADRUPLE 2-INPUT POSITIVE-OR GATE

D, DB, OR N PACKAGE

SCAS007C - JULY 1987 - REVISED APRIL 1996

- Center-Pin V<sub>CC</sub> and GND Configurations
  Minimize High-Speed Switching Noise
- EPIC™ (Enhanced-Performance Implanted CMOS) 1-μm Process
- 500-mA Typical Latch-Up Immunity at 125°C
- Package Options Include Plastic Small-Outline (D) and Shrink Small-Outline (DB) Packages, and Standard Plastic 300-mil DIPs (N)

#### (TOP VIEW) 1B 1A 2A 1Y 15 IJ2B 2Y L 3 14 GND L 13 V<sub>CC</sub> GND L l ν<sub>cc</sub> 12 **J** 3A 3Y 11 10 ☐ 3B 4Y

9 4A

4B

#### description


This device contains four independent 2-input OR gates. It performs the Boolean function Y = A + B or  $Y = \overline{A \bullet B}$  in positive logic.

The 74AC11032 is characterized for operation from -40°C to 85°C.

# FUNCTION TABLE (each gate)

INP	UTS	OUTPUT
Α	В	Υ
Н	Х	Н
Х	Н	Н
L	L	L

### logic symbol†

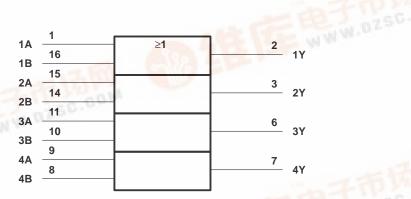

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.



Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

FPICIS a trademark of Texas Instruments Incorporated.



## 74AC11032 QUADRUPLE 2-INPUT POSITIVE-OR GATE

SCAS007C - JULY 1987 - REVISED APRIL 1996

### logic diagram (positive logic)

#### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

Supply voltage range, V <sub>CC</sub>		0.5 V to 7 V
Input voltage range, V <sub>I</sub> (see Note 1)		$\dots$ -0.5 V to V <sub>CC</sub> + 0.5 V
Output voltage range, V <sub>O</sub> (see Note 1)		$\dots$ -0.5 V to V <sub>CC</sub> + 0.5 V
Input clamp current, $I_{IK}$ ( $V_I < 0$ or $V_I > V_{CC}$ )		±20 mA
Output clamp current, I <sub>OK</sub> (V <sub>O</sub> < 0 or V <sub>O</sub> > V <sub>CC</sub> )		±50 mA
Continuous output current, $I_O(V_O = 0 \text{ to } V_{CC})$		±50 mA
Continuous current through V <sub>CC</sub> or GND		±100 mA
Maximum power dissipation at $T_A = 55^{\circ}C$ (in still air) (see Not	te 2): D package	1.3 W
	DB package	0.55 W
	N package	1.1 W
Storage temperature range, T <sub>sta</sub>		65°C to 150°C

<sup>†</sup> Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

NOTES: 1. The input and output voltage ratings may be exceeded if the input and output current ratings are observed.



<sup>2.</sup> The maximum package power dissipation is calculated using a junction temperature of 150 °C and a board trace length of 750 mils, except for the N package, which has a trace length of zero.

### 74AC11032 QUADRUPLE 2-INPUT POSITIVE-OR GATE

SCAS007C - JULY 1987 - REVISED APRIL 1996

#### recommended operating conditions

			MIN	NOM	MAX	UNIT	
V <sub>CC</sub> Supply voltage		3	5	5.5	V		
		V <sub>CC</sub> = 3 V	2.1				
V <sub>IH</sub> Hi	High-level input voltage	V <sub>CC</sub> = 4.5 V	3.15			V	
		V <sub>CC</sub> = 5.5 V	3.85				
		V <sub>CC</sub> = 3 V			0.9		
VIL	Low-level input voltage	V <sub>CC</sub> = 4.5 V			1.35	V	
	<b>-</b>	V <sub>CC</sub> = 5.5 V			1.65		
V <sub>I</sub> Input voltage		0		VCC	V		
Vo	Output voltage		0		VCC	V	
		V <sub>CC</sub> = 3 V		-4			
IOH	High-level output current	V <sub>CC</sub> = 4.5 V			-24	mA	
		$V_{CC} = 5.5 \text{ V}$			-24		
		V <sub>CC</sub> = 3 V			12		
loL	Low-level output current	V <sub>CC</sub> = 4.5 V			24	mA	
	V <sub>CC</sub> = 5.5 V				24		
Δt/Δv Input transition rise or fall rate		0		10	ns/V		
TA	Operating free-air temperature		-40		85	°C	

# electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)

PARAMETER	TEST CONDITIONS	Vac	T,	T <sub>A</sub> = 25°C			MAX	UNIT
PARAMETER	TEST CONDITIONS	Vcc	MIN	TYP	MAX	MIN	IVIAA	UNIT
		3 V	2.9			2.9		
	I <sub>OH</sub> = -50 μA	4.5 V	4.4			4.4		
		5.5 V	5.4			5.4		
Vон	$I_{OH} = -4 \text{ mA}$	3 V	2.58			2.48		V
		4.5 V	3.94			3.8		
	$I_{OH} = -24 \text{ mA}$		4.94			4.8		
	$I_{OH} = -75 \text{ mA}^{\dagger}$	5.5 V				3.85		
		3 V			0.1		0.1	
	I <sub>OL</sub> = 50 μA	4.5 V			0.1		0.1	
					0.1		0.1	
V <sub>OL</sub>	I <sub>OL</sub> = 12 mA	3 V			0.36		0.44	V
	1 24 mA	4.5 V			0.36		0.44	
	I <sub>OL</sub> = 24 mA				0.36		0.44	
	I <sub>OL</sub> = 75 mA <sup>†</sup>	5.5 V					1.65	
Ι <sub>Ι</sub>	$V_I = V_{CC}$ or GND	5.5 V			±0.1		±1	μΑ
Icc	$V_I = V_{CC}$ or GND, $I_O = 0$	5.5 V			4		40	μА
Ci	$V_I = V_{CC}$ or GND	5 V		3.5				pF

<sup>†</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed 10 ms.



SCAS007C - JULY 1987 - REVISED APRIL 1996

# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 3.3 V $\pm$ 0.3 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	T,	ղ = 25°C	;	MIN	MAX	UNIT
	(INPUT)	(OUTPUT)	MIN	TYP	MAX	IVIIIN	WAA	UNIT
t <sub>PLH</sub>	A or B	V	1.5	6.3	8.7	1.5	9.7	20
t <sub>PHL</sub>	AUID	T	1.5	5.4	7.4	1.5	8	ns


# switching characteristics over recommended operating free-air temperature range, $V_{CC}$ = 5 V $\pm$ 0.5 V (unless otherwise noted) (see Figure 1)

PARAMETER	FROM	то	T,	չ = 25°C	;	MIN	MAX	UNIT
	(INPUT)	(OUTPUT)	MIN	TYP	MAX	IVIIIV	IVIAA	ONIT
t <sub>PLH</sub>	A or B	V	1.5	4.3	6.2	1.5	6.7	no
<sup>t</sup> PHL	AUID	ī	1.5	3.8	5.5	1.5	5.9	ns

### operating characteristics, $V_{CC} = 5 \text{ V}$ , $T_A = 25^{\circ}\text{C}$

PARAMETER		TEST CO	TYP	UNIT	
C <sub>pd</sub>	Power dissipation capacitance per gate	C <sub>L</sub> = 50 pF,	f = 1 MHz	24	pF

#### PARAMETER MEASUREMENT INFORMATION

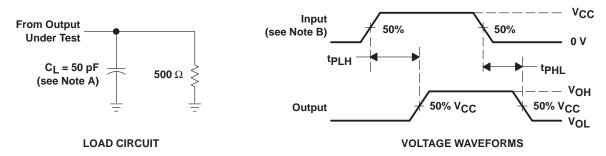

NOTES: A. C<sub>I</sub> includes probe and jig capacitance.

- B. Input pulses are supplied by generators having the following characteristics: PRR  $\leq$  1 MHz, Z<sub>O</sub> = 50  $\Omega$ , t<sub>f</sub> = 3 ns, t<sub>f</sub> = 3 ns.
- C. The outputs are measured one at a time with one input transition per measurement.

Figure 1. Load Circuit and Voltage Waveforms



#### **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.

Copyright © 1998, Texas Instruments Incorporated