

- Drives up to 20 Lines
- 70-V Output Voltage Swing Capability
- 40-mA Output Source Current Capability
- High-Speed Serially-Shifted Data Input
- CMOS-Compatible Inputs
- Direct Replacement for Sprague UCN5812A

## description


The TL5812 and TL5812I are monolithic BIFET† integrated circuits designed to drive a dot matrix or segmented vacuum fluorescent display (VFD). Each device features a serial data output to cascade additional devices for large display arrays.

A 20-bit data word is serially loaded into the shift register on the low-to-high transition of CLOCK. Parallel data is transferred to the output buffers through a 20-bit D-type latch while LATCH ENABLE is high and is latched when LATCH ENABLE is low. When BLANKING is high, all outputs are low.


The outputs are totem-pole structures formed by npn emitter-follower and double-diffused MOS (DMOS) transistors with output voltage ratings of 70 V and a source-current capability of 40 mA. All inputs are CMOS compatible.

The TL5812 is characterized for operation from 0°C to 70°C. The TL5812I is characterized for operation from –40°C to 85°C.

N PACKAGE  
(TOP VIEW)

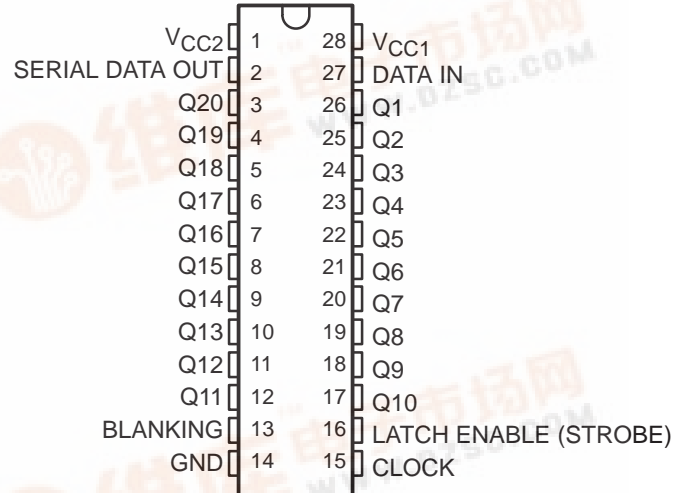

FN PACKAGE  
(TOP VIEW)

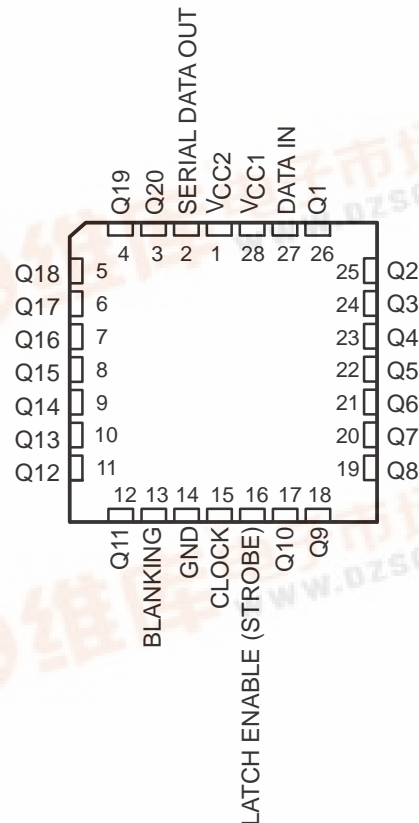


† BIFET – Bipolar, double-diffused, N-channel and P-channel MOS transistors on same chip. This is a patented process.

TL5812, TL5812I  
VACUUM FLUORESCENT DISPLAY DRIVERS


SLDS011B – OCTOBER 1985 – REVISED MAY 1993

logic symbol†

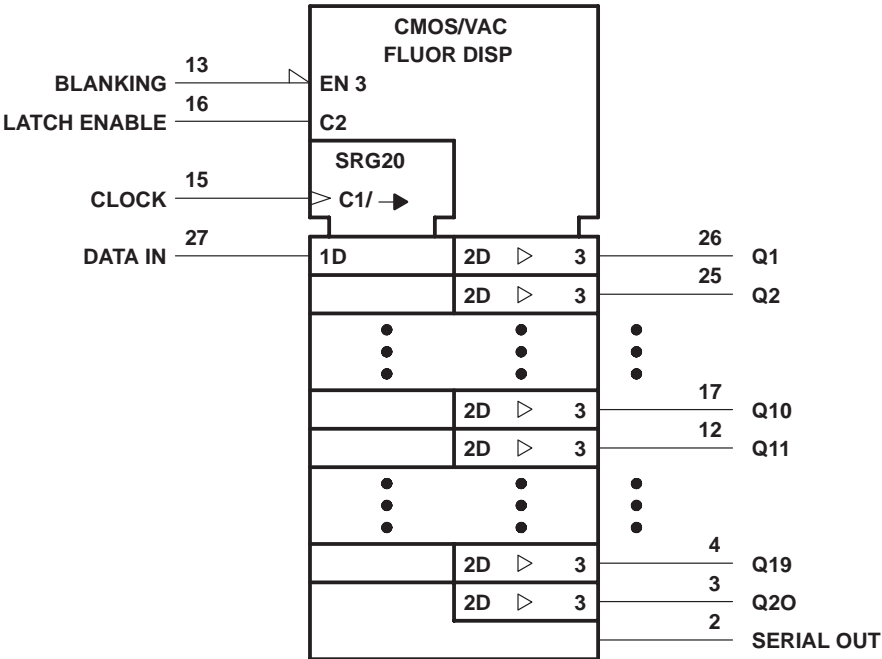

† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

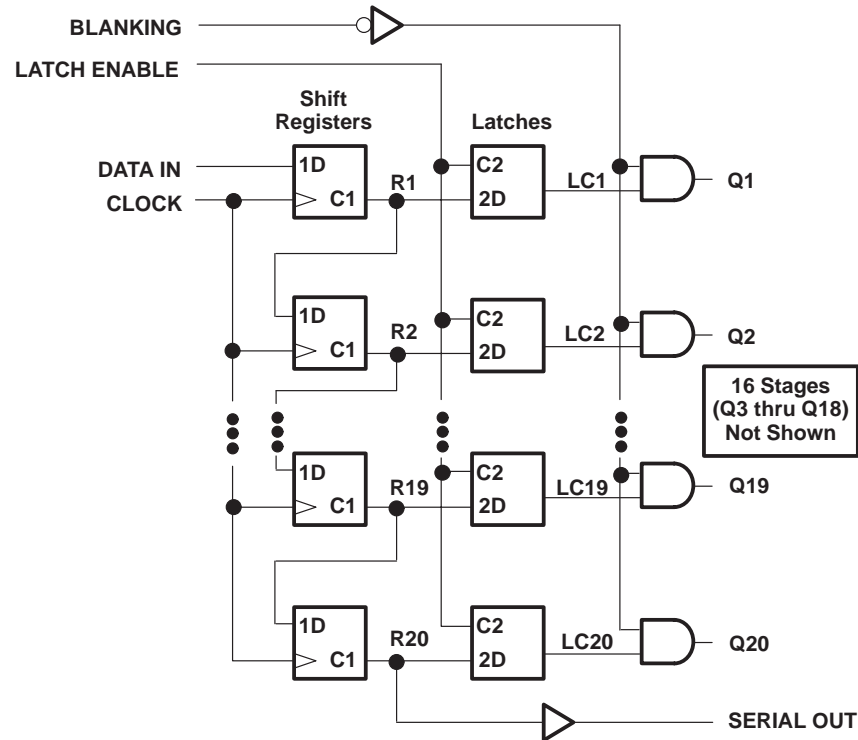

# TL5812, TL5812I VACUUM FLUORESCENT DISPLAY DRIVERS

SLDS011B – OCTOBER 1985 – REVISED MAY 1993

FUNCTION TABLE


FUNCTION	CONTROL INPUTS			SHIFT REGISTERS R1 THRU R20	LATCHES LC1 THRU LC20	OUTPUTS	
	CLOCK	LATCH ENABLE	BLANKING			SERIAL	Q1 THRU Q20
Load	↑	X	X	Load and shift†	Determined by	R20	Determined by BLANKING
	No↑	X	X	No change	LATCH ENABLE‡	R20	
Latch	X	L	X	As determined above	Stored data	R20	Determined by BLANKING
	X	H	X		New data	R20	
Blank	X	X	H	As determined above	Determined by LATCH ENABLE‡	R20	All L LC1 thru LC10, respectively
	X	X	L			R20	

H = high level, L = low level, X = irrelevant, ↑ = low-to-high-level transition.


† R20 takes on the state of R19, R19 takes on the state of R18, ... R2 takes on the state of R1, and R1 takes on the state of the data input.

‡ New data enter the latches while LATCH ENABLE is high. These data are stored while LATCH ENABLE is low.

## typical operating sequence

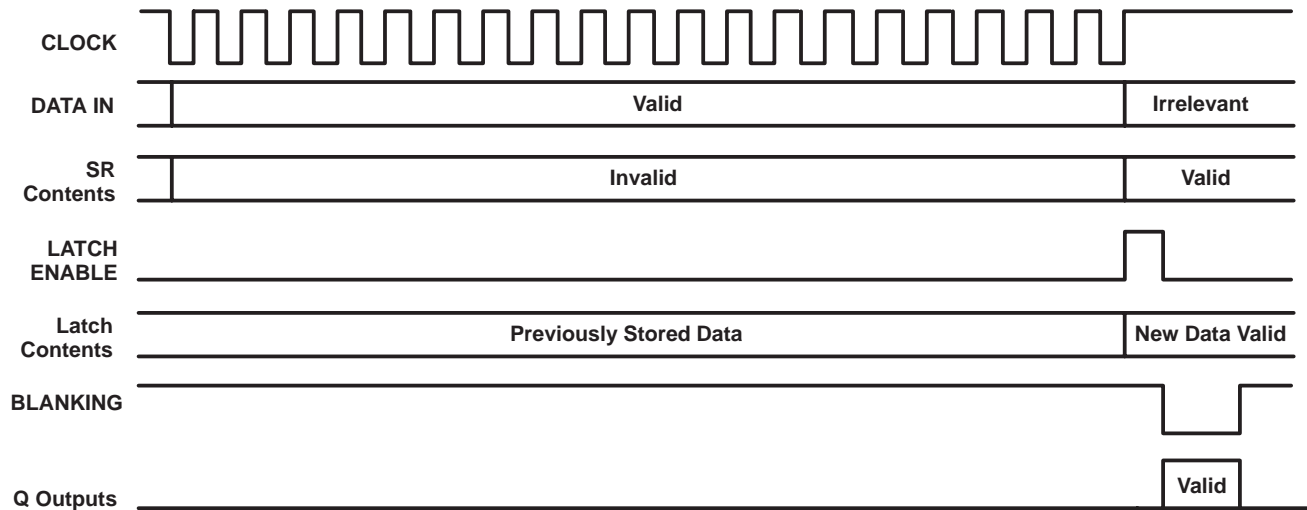

## schematics of inputs and outputs

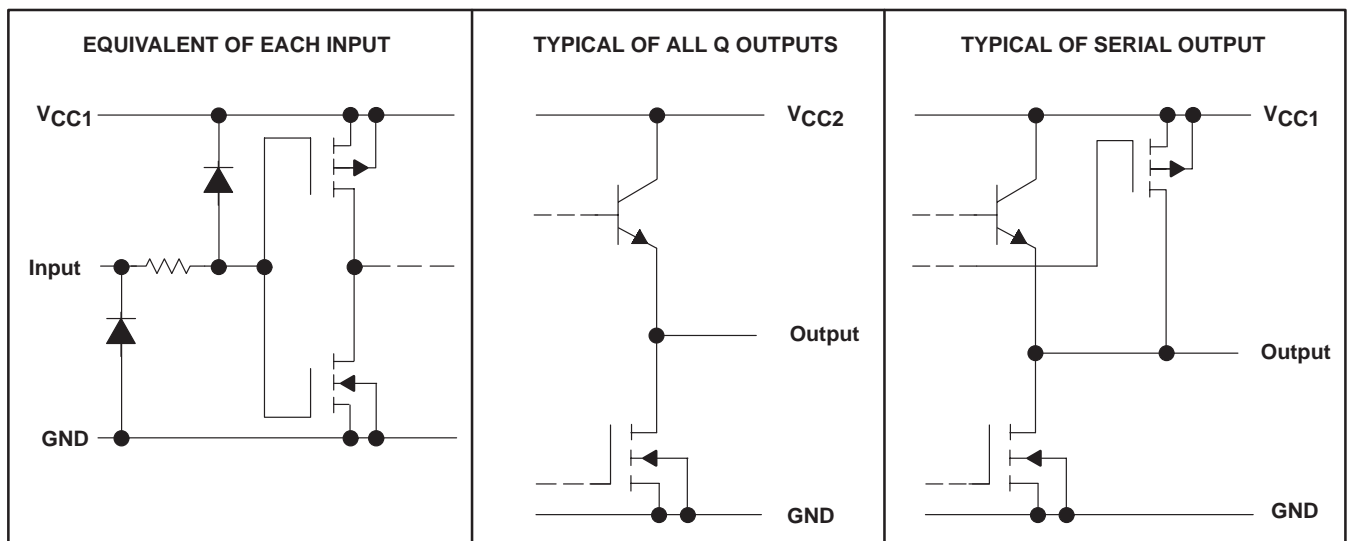

# TL5812, TL5812I

## VACUUM FLUORESCENT DISPLAY DRIVERS

SLDS011B – OCTOBER 1985 – REVISED MAY 1993

### absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC1}$ (see Note 1)	15 V
Supply voltage, $V_{CC2}$	70 V
Output voltage, $V_O$	70 V
Input voltage range, $V_I$	–0.3 V to $V_{CC1} + 0.3$ V
Output current, $I_O$	–40 mA
Continuous total power dissipation	See Dissipation Rating Table
Operating free-air temperature range: TL5812	0°C to 70°C
TL5812I	–40°C to 85°C
Storage temperature range,	–65°C to 150°C
Case temperature for 10 seconds: FN package	260°C
Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds: N package	260°C

NOTE 1: All voltage values are with respect to GND.

DISSIPATION RATING TABLE

PACKAGE	$T_A \leq 25^\circ\text{C}$ POWER RATING	DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$	$T_A = 70^\circ\text{C}$ POWER RATING	$T_A = 85^\circ\text{C}$ POWER RATING
FN	1400 mW	11.2 mW/°C	896 mW	728 mW
N	1150 mW	9.2 mW/°C	736 mW	598 mW

### recommended operating conditions

		MIN	NOM	MAX	UNIT
Supply voltage, $V_{CC1}$		4.5		15	V
Supply voltage, $V_{CC2}$		0		60	V
High-level input voltage, $V_{IH}$		$V_{CC1} - 1.5$		$V_{CC1} + 0.3$	V
Low-level input voltage, $V_{IL}$		–0.3†		0.8	V
High-level output current, $I_{OH}$				–40	mA
Operating free-air temperature, $T_A$	TL5812	0		70	°C
	TL5812I	–40		85	

† The algebraic convention, in which the less positive (more negative) limit is designated as minimum, is used in this data sheet for logic voltage levels.

# TL5812, TL5812I

## VACUUM FLUORESCENT DISPLAY DRIVERS

SLDS011B – OCTOBER 1985 – REVISED MAY 1993

**electrical characteristics over operating free-air temperature range,  $V_{DD} = 5\text{ V}$  to  $15\text{ V}$ ,  $V_{BB} = 60\text{ V}$  (unless otherwise noted)**

PARAMETER		TEST CONDITIONS	MIN	TYP <sup>‡</sup>	MAX	UNIT
$V_{OH}$ High-level output	Q outputs	$I_{OH} = -25\text{ mA}$	57.5	58.2		V
	SERIAL DATA OUT	$V_{CC1} = 5\text{ V}$ , $I_{OH} = -20\text{ }\mu\text{A}$	4.5	4.9		
		$V_{CC1} = 15\text{ V}$ , $I_{OH} = -20\text{ }\mu\text{A}$	14.5	14.9		
$V_{OL}$ Low-level output voltage	Q outputs	$I_{OL} = 1\text{ mA}$ , BLANKING at $V_{CC1}$		0.7	1.5	V
	SERIAL DATA OUT	$V_{CC1} = 5\text{ V}$ , $I_{OL} = 20\text{ }\mu\text{A}$		0.06	0.3	
		$V_{CC1} = 15\text{ V}$ , $I_{OL} = 20\text{ }\mu\text{A}$		0.03	0.3	
$I_{IH}$ High-level input current		$V_I = V_{CC1}$		0.3	1	$\mu\text{A}$
$I_{IL}$ Low-level input current		$V_I = 0$		-0.3	-1	$\mu\text{A}$
$I_{OL}$ Low-level output current (pulldown current)		$V_O = 60\text{ V}$ , BLANKING at $V_{CC1}$	2.5	3.2		$\mu\text{A}$
$I_{O(off)}$ Off-state output current		$V_O = 0$ , BLANKING at $V_{CC1}$	< -1	-15		$\mu\text{A}$
$I_{CC2}$ Supply current from $V_{CC2}$		Outputs high		3.5	8	mA
		Outputs low		0.02	0.5	
$I_{CC1}$ Supply current from $V_{CC1}$		$V_{CC1} = 5\text{ V}$		1.5	3	mA
		$V_{CC1} = 15\text{ V}$		1.7	4	

<sup>‡</sup> All typical characteristics are at  $T_A = 25^\circ\text{C}$ .

### timing requirements over operating free-air temperature range

			MIN	MAX	UNIT
$t_{w(CKH)}$ Pulse duration, CLOCK high		$V_{CC1} = 5\text{ V}$	500		ns
		$V_{CC1} = 15\text{ V}$	100		
$t_{w(LEH)}$ Pulse duration, LATCH ENABLE high		$V_{CC1} = 5\text{ V}$	500		ns
		$V_{CC1} = 15\text{ V}$	100		
$t_{su(D)}$ Setup time, DATA IN before CLOCK $\uparrow$		$V_{CC1} = 5\text{ V}$	150		ns
		$V_{CC1} = 15\text{ V}$	75		
$t_h(D)$ Hold time, DATA IN after CLOCK $\uparrow$		$V_{CC1} = 5\text{ V}$	150		ns
		$V_{CC1} = 15\text{ V}$	75		
$t_d(CKH-LEH)$ Delay time, CLOCK $\uparrow$ to LATCH ENABLE high		$V_{CC1} = 5\text{ V}$	150		ns
		$V_{CC1} = 15\text{ V}$	75		

### switching characteristics, $V_{BB} = 60\text{ V}$ , $T_A = 25^\circ\text{C}$

PARAMETER		MIN	TYP	MAX	UNIT
$t_{pd}$ Propagation delay time, LATCH ENABLE to Q outputs	$V_{CC1} = 5\text{ V}$		2.2		$\mu\text{s}$
	$V_{CC1} = 15\text{ V}$		0.8		

TL5812, TL5812I  
VACUUM FLUORESCENT DISPLAY DRIVERS

SLDS011B – OCTOBER 1985 – REVISED MAY 1993

PARAMETER MEASUREMENT INFORMATION

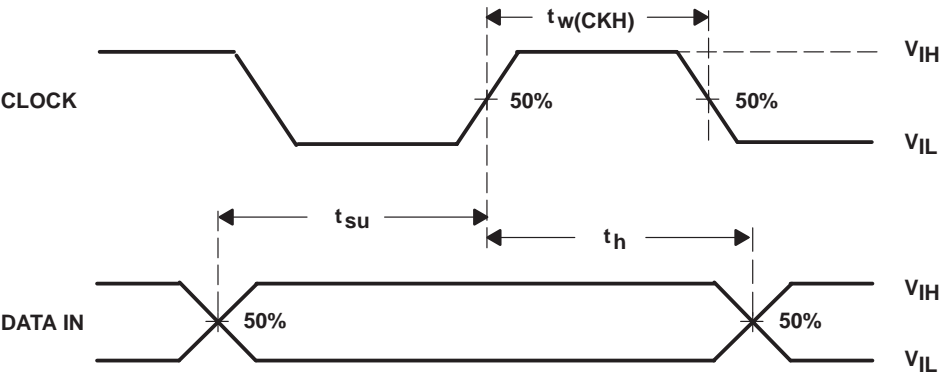


Figure 1. Input Timing

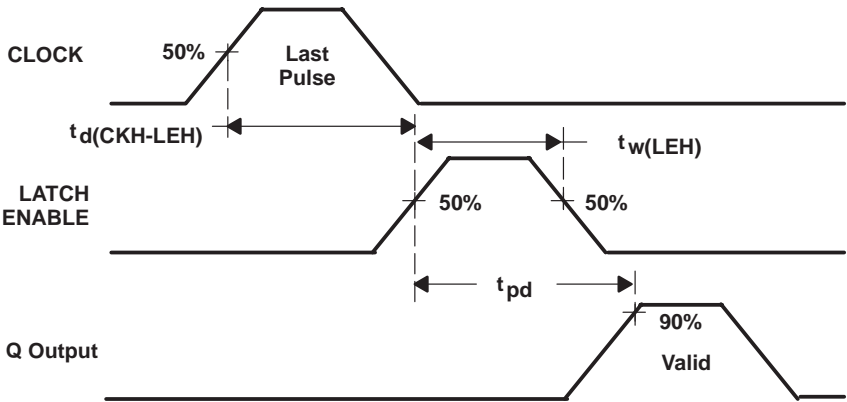


Figure 2. Output Switching Times

# TL5812, TL5812I VACUUM FLUORESCENT DISPLAY DRIVERS

SLDS011B – OCTOBER 1985 – REVISED MAY 1993

## THERMAL INFORMATION

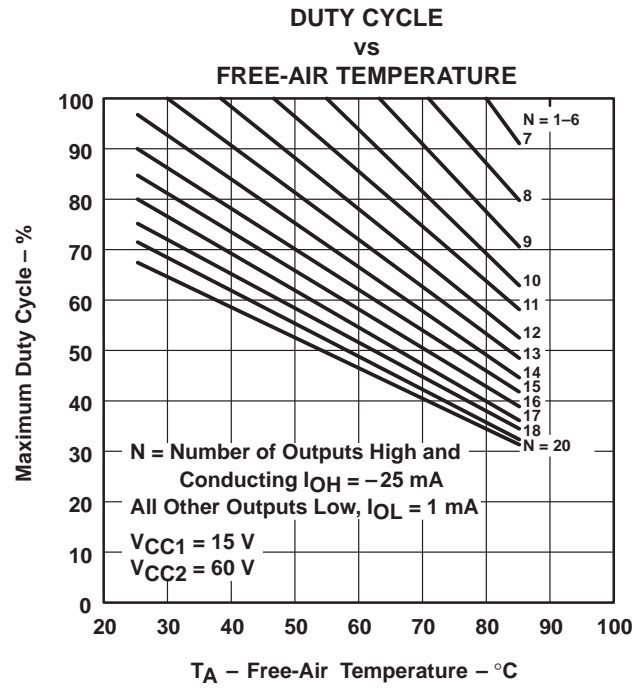


Figure 3

## **IMPORTANT NOTICE**

Texas Instruments and its subsidiaries (TI) reserve the right to make changes to their products or to discontinue any product or service without notice, and advise customers to obtain the latest version of relevant information to verify, before placing orders, that information being relied on is current and complete. All products are sold subject to the terms and conditions of sale supplied at the time of order acknowledgement, including those pertaining to warranty, patent infringement, and limitation of liability.

TI warrants performance of its semiconductor products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are utilized to the extent TI deems necessary to support this warranty. Specific testing of all parameters of each device is not necessarily performed, except those mandated by government requirements.

CERTAIN APPLICATIONS USING SEMICONDUCTOR PRODUCTS MAY INVOLVE POTENTIAL RISKS OF DEATH, PERSONAL INJURY, OR SEVERE PROPERTY OR ENVIRONMENTAL DAMAGE ("CRITICAL APPLICATIONS"). TI SEMICONDUCTOR PRODUCTS ARE NOT DESIGNED, AUTHORIZED, OR WARRANTED TO BE SUITABLE FOR USE IN LIFE-SUPPORT DEVICES OR SYSTEMS OR OTHER CRITICAL APPLICATIONS. INCLUSION OF TI PRODUCTS IN SUCH APPLICATIONS IS UNDERSTOOD TO BE FULLY AT THE CUSTOMER'S RISK.

In order to minimize risks associated with the customer's applications, adequate design and operating safeguards must be provided by the customer to minimize inherent or procedural hazards.

TI assumes no liability for applications assistance or customer product design. TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right of TI covering or relating to any combination, machine, or process in which such semiconductor products or services might be or are used. TI's publication of information regarding any third party's products or services does not constitute TI's approval, warranty or endorsement thereof.