

2SK2767-01

查询2SK2767-01-1供应商

捷多邦，专业PCB打样工厂，24小时加急出货

FUJI POWER MOSFET

N-CHANNEL SILICON POWER MOSFET

FAP-2S Series

■ Features

High speed switching
Low on-resistance
No secondary breakdown
Low driving power
Avalanche-proof

■ Applications

Switching regulators
UPS (Uninterruptible Power Supply)
DC-DC converters


■ Maximum ratings and characteristicAbsolute maximum ratings

● (Tc=25°C unless otherwise specified)


Item	Symbol	Ratings	Unit
Drain-source voltage	V _{DS}	900	V
Continuous drain current	I _D	±3.5	A
Pulsed drain current	I _D (puls)	±14	A
Gate-source voltage	V _{GS}	±35	V
Repetitive or non-repetitive	IAR *2	3.5	A
Maximum Avalanche Energy	EAS*1	258	mJ
Max. power dissipation	P _D	80	W
Operating and storage temperature range	T _{ch} T _{stg}	+150 -55 to +150	°C

*1 L=38.6mH, V_{CC}=90V *2 T_{ch}≤150°C

■ Outline Drawings

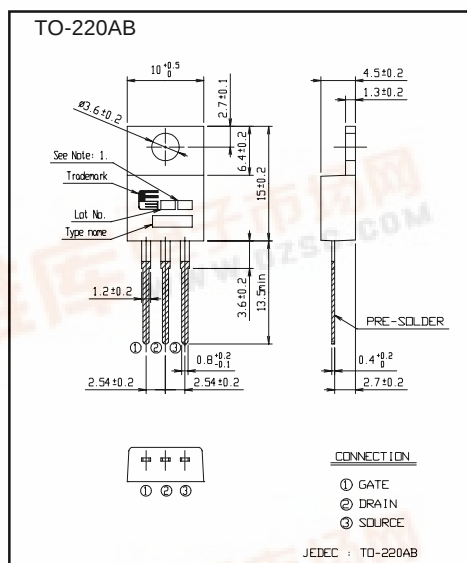

■ Equivalent circuit schematic

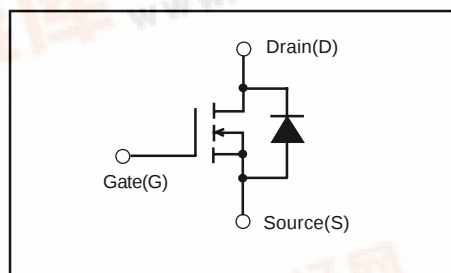● Electrical characteristics (T_c=25°C unless otherwise specified)







Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V _{(BR)DSS}	I _D =1mA V _{GS} =0V	900			V
Gate threshold voltage	V _{GS(th)}	I _D =1mA V _{DS} =V _{GS}	3.5	4.0	4.5	V
Zero gate voltage drain current	I _{DSS}	V _{DS} =900V V _{GS} =0V T _{ch} =25°C		10	500	μA
		T _{ch} =125°C		0.2	1.0	mA
Gate-source leakage current	I _{GSS}	V _{GS} =±35V V _{DS} =0V		10	100	nA
Drain-source on-state resistance	R _{DS(on)}	I _D =2.0A V _{GS} =10V		4.0	5.5	Ω
Forward transconductance	g _{fs}	I _D =2.0A V _{DS} =25V	1.0	2.0		S
Input capacitance	C _{iss}	V _{DS} =25V V _{GS} =0V		450	680	pF
Output capacitance	C _{oss}	f=1MHz		75	120	
Reverse transfer capacitance	C _{rss}			40	60	
Turn-on time t _{on}	td(on)	V _{CC} =600V I _D =3.5A V _{GS} =10V		20	30	ns
	tr	R _{GS} =10 Ω		40	60	
Turn-off time t _{off}	td(off)			50	80	
	tr			25	40	
Avalanche capability	I _{AV}	L=100 μH T _{ch} =25°C	3.5			A
Diode forward on-voltage	V _{SD}	I _F =2I _{DR} V _{GS} =0V T _{ch} =25°C		1.0	1.5	V
Reverse recovery time	t _{rr}	I _F =I _{DR} V _{GS} =0V		1000		ns
Reverse recovery charge	Q _{rr}	-di/dt=100A/μs T _{ch} =25°C		5.0		μC

● Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R _{th(ch-c)}	channel to case			1.56	°C/W
	R _{th(ch-a)}	channel to ambient			75.0	°C/W




Characteristics

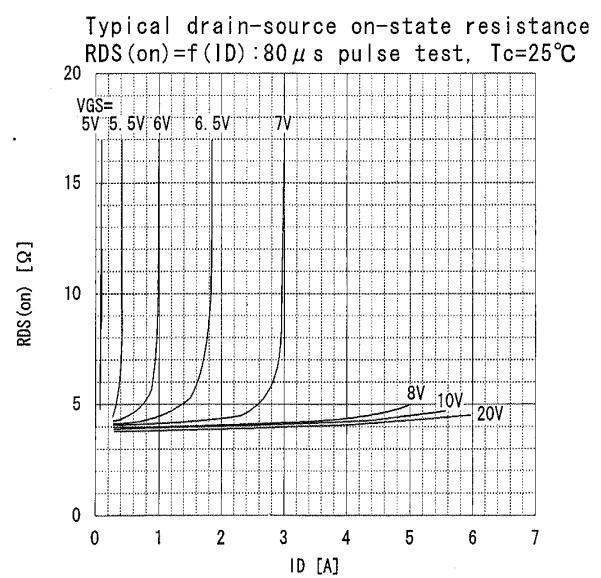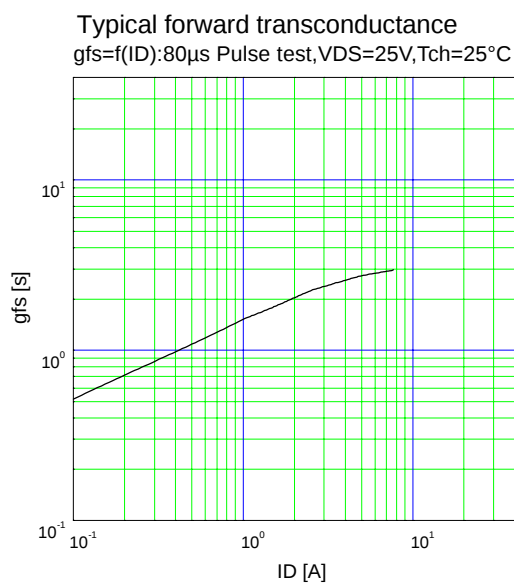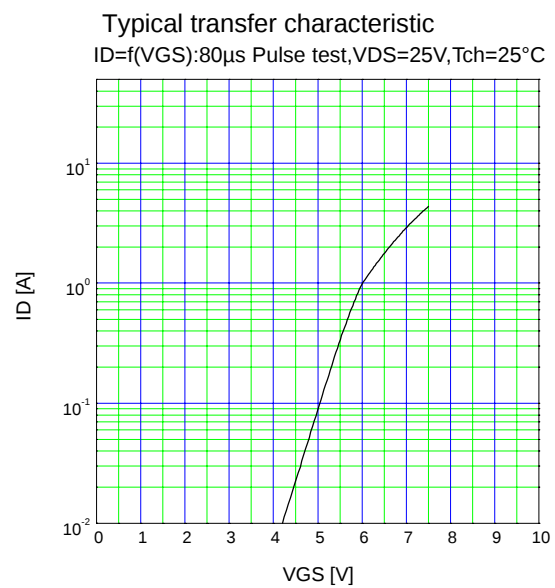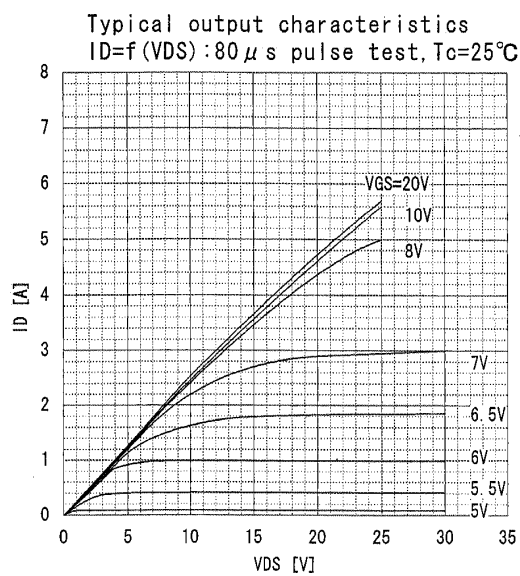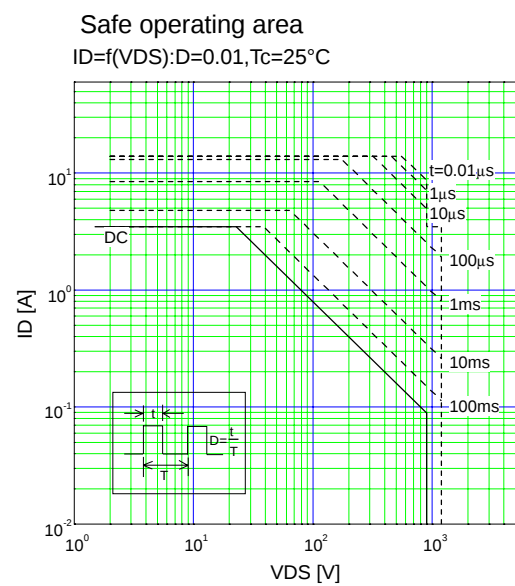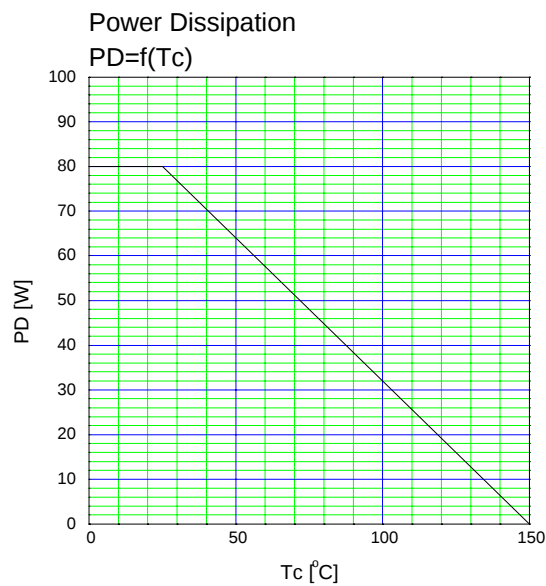


Drain-source on-state resistance

$$R_{DS(on)} = f(T_{ch}): I_D = 2A, V_{GS} = 10V$$

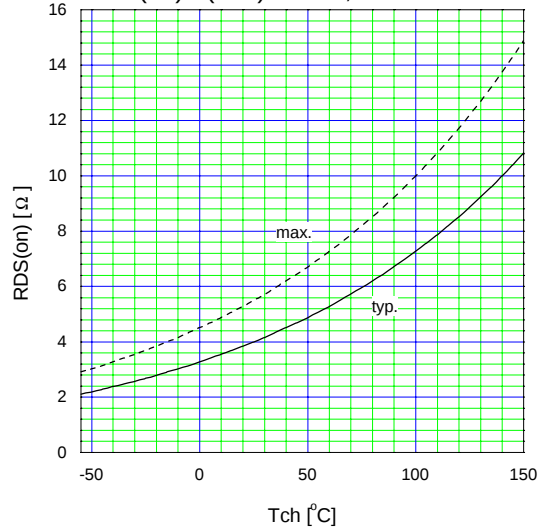


Gate threshold voltage

$$V_{GS(th)} = f(T_{ch}): I_D = 1mA, V_{DS} = V_{GS}$$

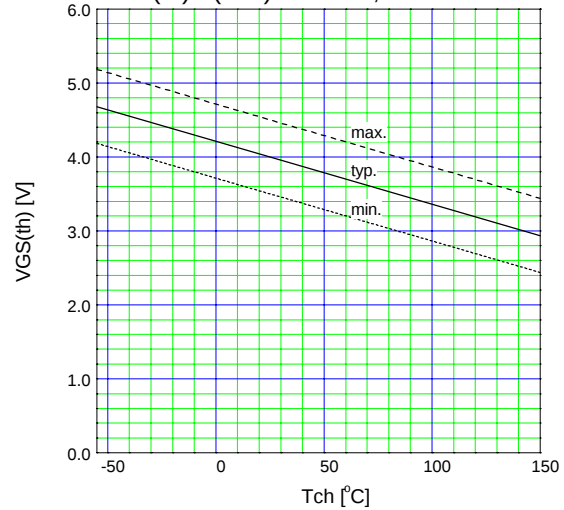


Typical gate charge characteristic

$$V_{GS} = f(Q_g): I_D = 3.5A, T_{ch} = 25^{\circ}C$$

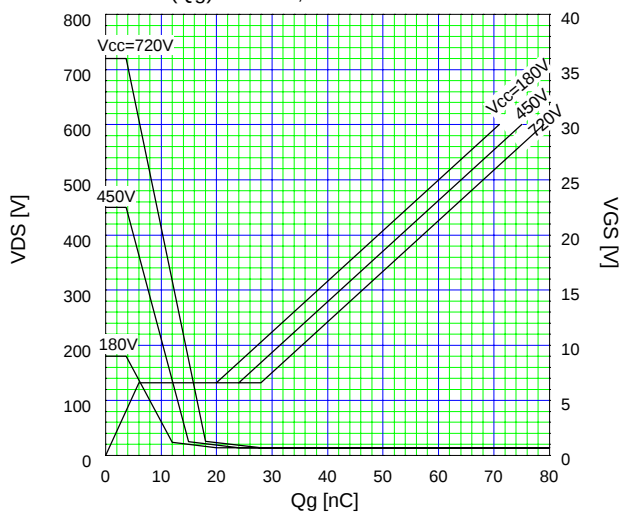


Typical capacitances

$$C = f(V_{DS}): V_{GS} = 0V, f = 1MHz$$

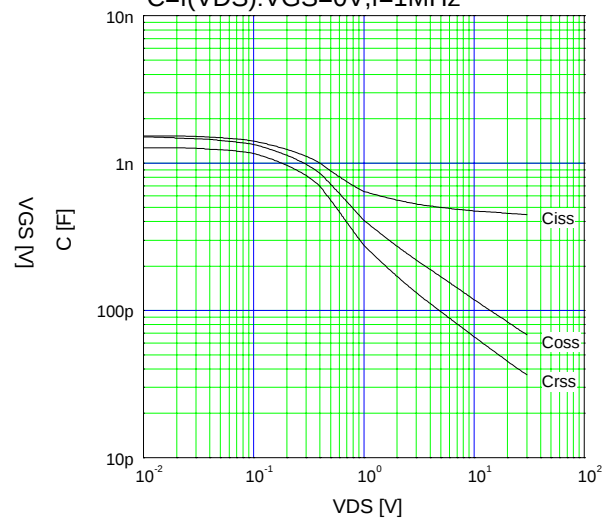

Forward characteristic of reverse of diode

$$I_F = f(V_{SD}): 80\mu s \text{ Pulse test}, V_{GS} = 0V$$

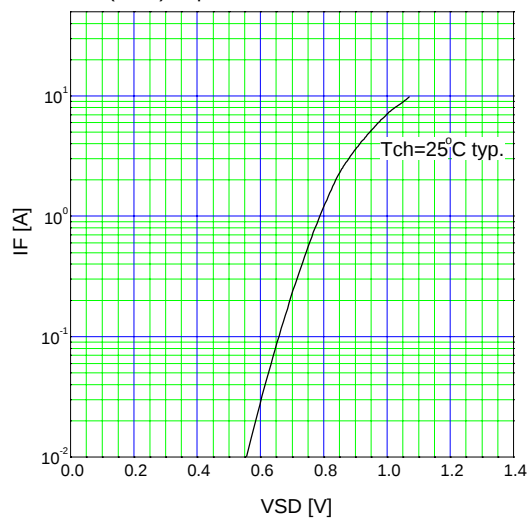

Avalanche energy derating

$$E_{as} = f(\text{starting } T_{ch}): V_{CC} = 90V, I_{AV} = 3.5A$$

