
2SC2732


Silicon NPN Epitaxial

HITACHI

Application

UHF frequency converter

Outline

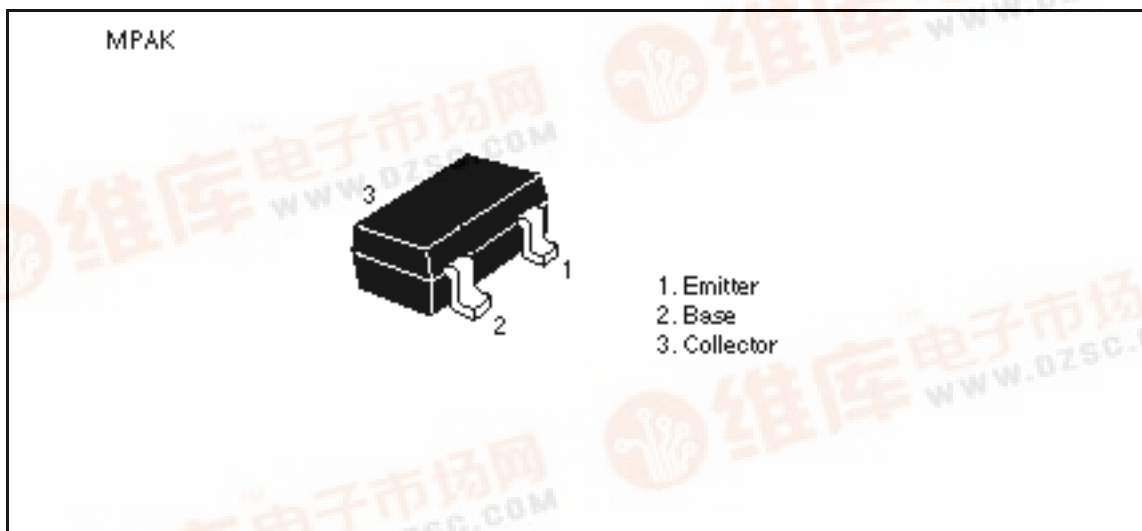

2SC2732


Absolute Maximum Ratings (Ta = 25°C)

Item	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	30	V
Collector to emitter voltage	V_{CEO}	25	V
Emitter to base voltage	V_{EBO}	4	V
Collector current	I_C	20	mA
Collector power dissipation	P_C	150	mW
Junction temperature	T_j	150	°C
Storage temperature	T_{stg}	-55 to +150	°C


Electrical Characteristics (Ta = 25°C)

Item	Symbol	Min	Typ	Max	Unit	Test conditions
Collector to base breakdown voltage	$V_{(BR)CBO}$	30	—	—	V	$I_C = 10 \mu A, I_E = 0$
Collector to emitter breakdown voltage	$V_{(BR)CEO}$	25	—	—	V	$I_C = 1 \text{ mA}, R_{BE} =$
Emitter to base breakdown voltage	$V_{(BR)EBO}$	4	—	—	V	$I_E = 10 \mu A, I_C = 0$
Collector cutoff current	I_{CBO}	—	—	0.5	μA	$V_{CB} = 10 \text{ V}, I_C = 0$
Collector to emitter saturation voltage	$V_{CE(sat)}$	—	—	5	V	$I_C = 10 \text{ mA}, I_B = 1 \text{ mA}$
DC current transfer ratio	h_{FE}	30	60	—		$V_{CE} = 10 \text{ V}, I_C = 3 \text{ mA}$
Gain bandwidth product	f_T	700	1000	—	MHz	$V_{CE} = 10 \text{ V}, I_C = 5 \text{ mA}$
Collector output capacitance	C_{ob}	—	0.5	0.8	pF	$V_{CB} = 10 \text{ V}, I_E = 0, f = 1 \text{ MHz}$
Conversion gain	CG	—	7.0	—	dB	$V_{CC} = 12 \text{ V}, I_C = 1 \text{ mA},$ $f = 900 \text{ MHz},$ $f_{osc} = 930 \text{ MHz (0dBm)},$ $f_{out} = 30 \text{ MHz}$
Noise figure	NF	—	10.0	—	dB	$V_{CC} = 12 \text{ V}, I_C = 1 \text{ mA},$ $f = 900 \text{ MHz},$ $f_{osc} = 930 \text{ MHz (0dBm)},$ $f_{out} = 30 \text{ MHz}$


Note: Marking is "EC".

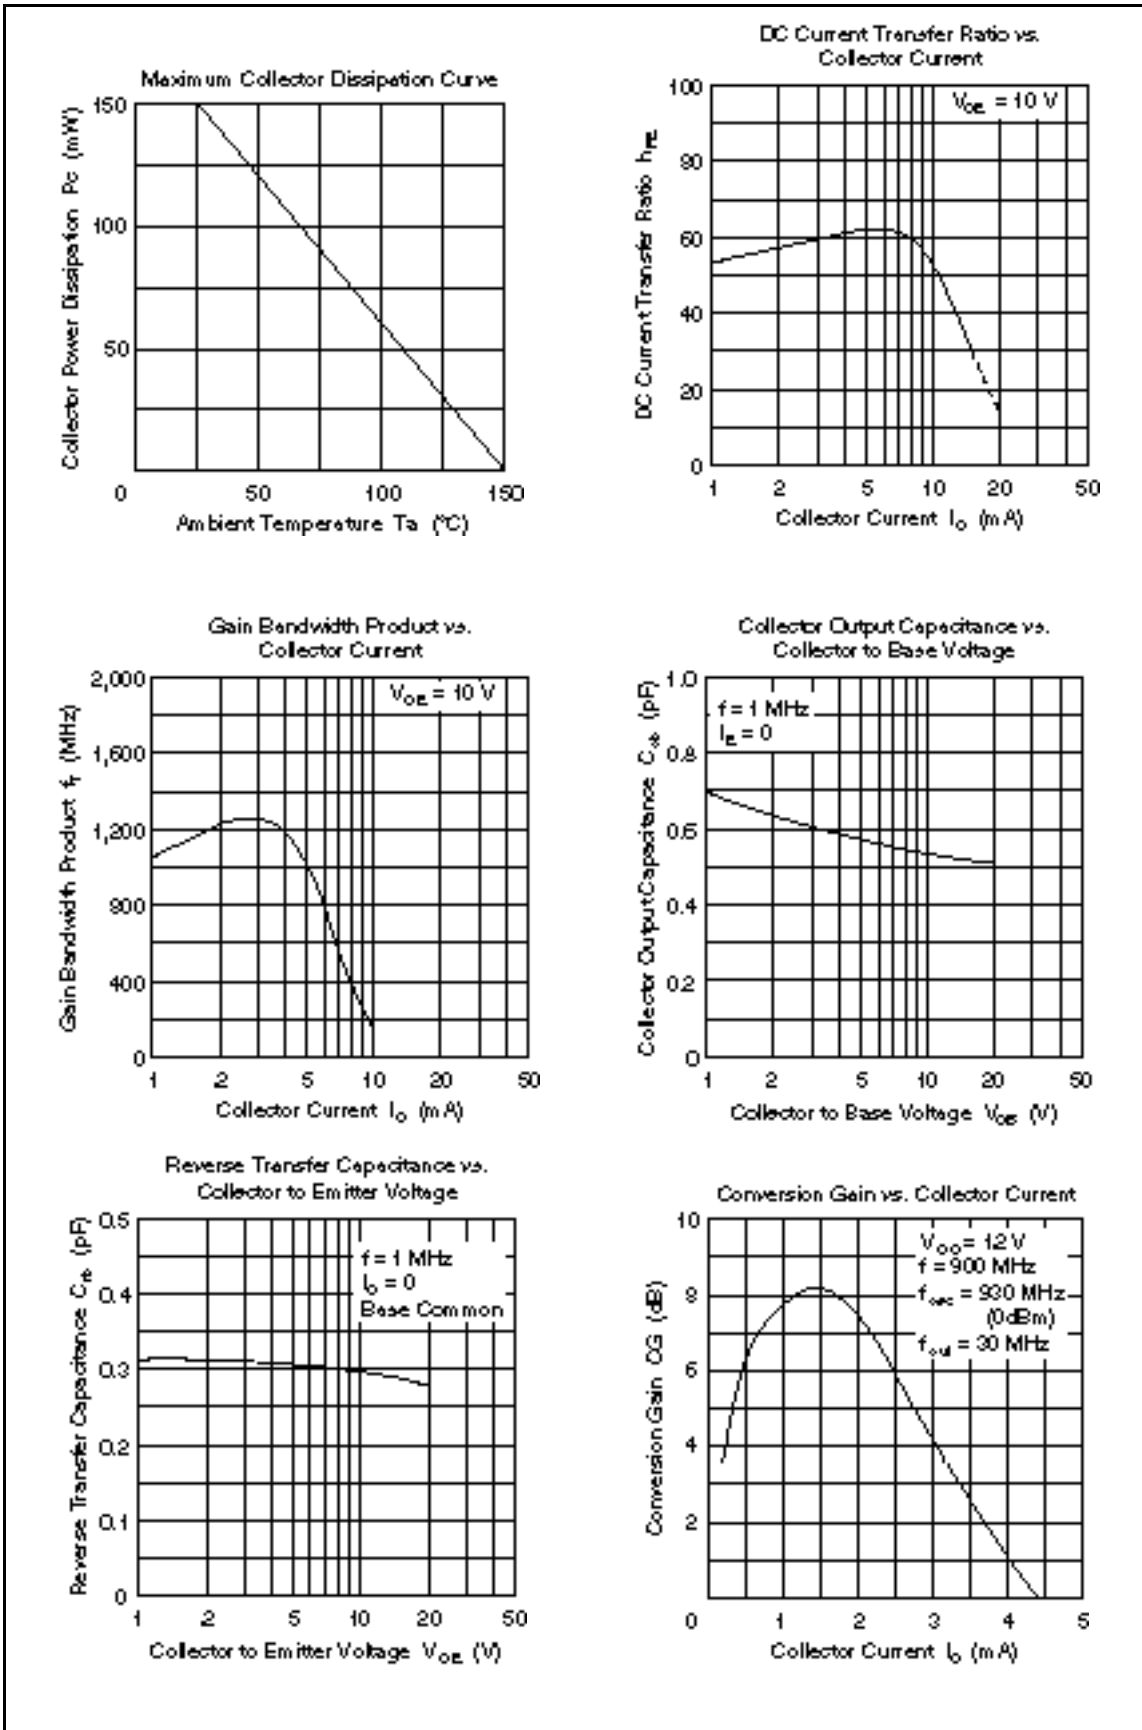

2SC2732

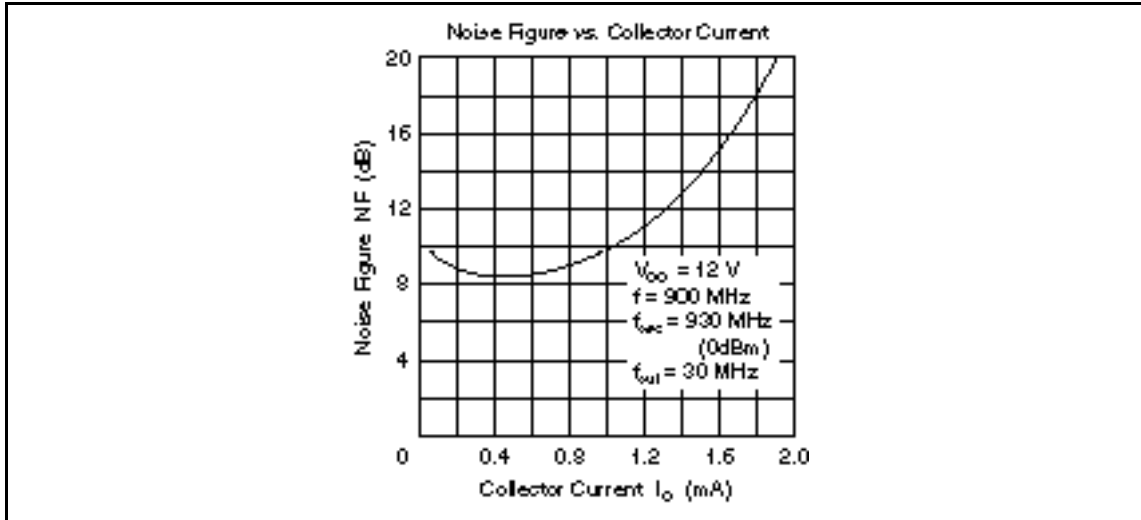


Conversion Gain, Noise Figure Test Circuit

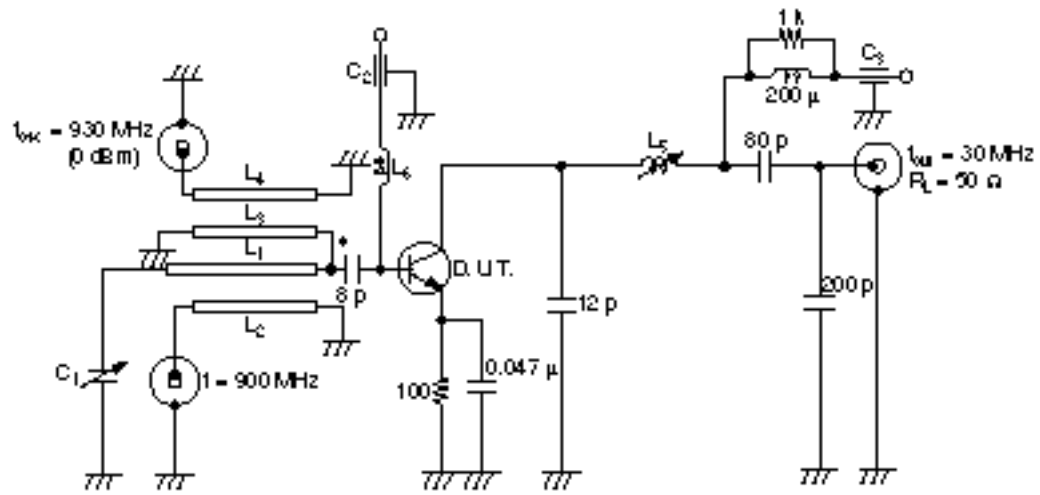

-----Disk Capacitor
 Unit R: Ω
 C: F
 L: H

- L₁ : ϕ 1 mm Enameled Copper wire
- L₂ : ϕ 1 mm Enameled Copper wire
- L₃ : ϕ 1 mm Enameled Copper wire
- L₄ : ϕ 1 mm Enameled Copper wire
- L_c : Bobbin ϕ 0.5 mm Inside dia, ϕ 0.2 mm Enameled Copper wire 20 Turns
- L_l : ϕ 5 mm Enameled Copper wire 1 Turns Inside dia ϕ 6 mm
- C₁ : 20 pF max. Air Trimmer Condenser
- C₂, C₃ : 1000 pF Air Core Capacitor

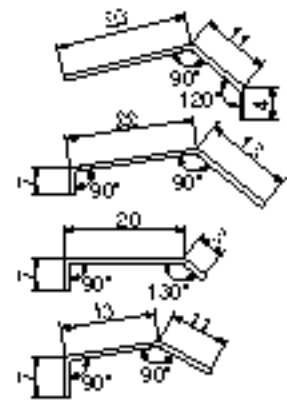

Unit: mm

When using this document, keep the following in mind:

1. This document may, wholly or partially, be subject to change without notice.
2. All rights are reserved: No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without Hitachi's permission.
3. Hitachi will not be held responsible for any damage to the user that may result from accidents or any other reasons during operation of the user's unit according to this document.
4. Circuitry and other examples described herein are meant merely to indicate the characteristics and performance of Hitachi's semiconductor products. Hitachi assumes no responsibility for any intellectual property claims or other problems that may result from applications based on the examples described herein.
5. No license is granted by implication or otherwise under any patents or other rights of any third party or Hitachi, Ltd.
6. **MEDICAL APPLICATIONS:** Hitachi's products are not authorized for use in **MEDICAL APPLICATIONS** without the written consent of the appropriate officer of Hitachi's sales company. Such use includes, but is not limited to, use in life support systems. Buyers of Hitachi's products are requested to notify the relevant Hitachi sales offices when planning to use the products in **MEDICAL APPLICATIONS**.

HITACHI

Hitachi, Ltd.

Semiconductor & IC Div.

Nippon Bldg., 2-6-2, Ohite-machi, Chiyoda-ku, Tokyo 100, Japan

Tel: Tokyo (03) 3270-2111

Fax: (03) 3270-5109

For further information write to:

Hitachi America, Ltd.

Semiconductor & IC Div.

2000 Sierra Point Parkway

Brabens, CA 94005-4835

U.S.A.

Tel: 415-589-8300

Fax: 415-589-4207

Hitachi Europe GmbH

Electronic Components Group

Continental Europe

Darnecker Straße 3

D-85522 Feldkirchen

München

Tel: 089-9 24 80-0

Fax: 089-9 29 30 00

Hitachi Europe Ltd.

Electronic Components Div.

Northern Europe Headquarters

Whitbrook Park

Lower Cookham Road

Maidenhead

Berkshire SL6 6YU

United Kingdom

Tel: 0628-585000

Fax: 0628-778322

Hitachi Asia Pte. Ltd.

45 Collyer Quay #20-00

Hitachi Tower

Singapore 0104

Tel: 535-2100

Fax: 535-1533

Hitachi Asia (Hong Kong) Ltd.

Unit 705, North Tower,

World Finance Centre

Harbour City, Canton Road

Tsim Sha Tsui, Kowloon

Hong Kong

Tel: 27389218

Fax: 27308074