

MITSUBISHI Nch POWER MOSFET

FS7KM-12

HIGH-SPEED SWITCHING USE


FS7KM-12



| | |
|-----------------------------------|-------|
| ∨ V _{DSS} | 600V |
| ∨ r _{DS(ON)} (MAX) | 1.3Ω |
| ∨ I _D | 7A |
| ∨ V _{iso} | 2000V |

OUTLINE DRAWING

Dimensions in mm

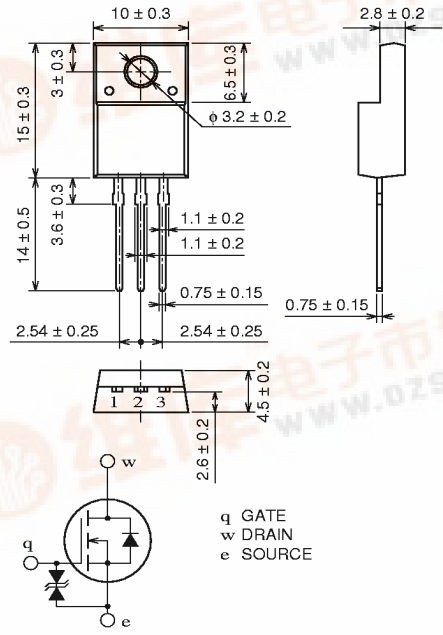

TO-220FN

APPLICATION

SMPS, DC-DC Converter, battery charger, power supply of printer, copier, HDD, FDD, TV, VCR, personal computer etc.

MAXIMUM RATINGS (T_c = 25°C)

| Symbol | Parameter | Conditions | Ratings | Unit |
|------------------|---------------------------|-----------------------------------|------------|------------------|
| V _{DSS} | Drain-source voltage | V _{GS} = 0V | 600 | V |
| V _{GSS} | Gate-source voltage | V _{DS} = 0V | ±30 | V |
| I _D | Drain current | | 7 | A |
| I _{DM} | Drain current (Pulsed) | | 21 | A |
| PD | Maximum power dissipation | | 35 | W |
| T _{ch} | Channel temperature | | -55 ~ +150 | °C |
| T _{stg} | Storage temperature | | -55 ~ +150 | °C |
| V _{iso} | Isolation voltage | AC for 1 minute, Terminal to case | 2000 | V _{rms} |
| — | Weight | Typical value | 2.0 | g |





FS7KM-12

HIGH-SPEED SWITCHING USE

ELECTRICAL CHARACTERISTICS (T_{ch} = 25°C)

| Symbol | Parameter | Test conditions | Limits | | | Unit |
|------------------------|----------------------------------|---|--|------|------|------|
| | | | Min. | Typ. | Max. | |
| V (BR) DSS | Drain-source breakdown voltage | I _D = 1 mA, V _{GS} = 0V | 600 | — | — | V |
| V (BR) GSS | Gate-source breakdown voltage | I _G = ±100μA, V _{DS} = 0V | ±30 | — | — | V |
| I _{GSS} | Gate-source leakage current | V _{GS} = ±25V, V _{DS} = 0V | — | — | ±10 | μA |
| I _{DSS} | Drain-source leakage current | V _{DS} = 600V, V _{GS} = 0V | — | — | 1 | mA |
| V _{GS} (th) | Gate-source threshold voltage | I _D = 1 mA, V _{DS} = 10V | 2 | 3 | 4 | V |
| r _{DS} (ON) | Drain-source on-state resistance | I _D = 3A, V _{GS} = 10V | — | 1.0 | 1.3 | Ω |
| V _{DS} (ON) | Drain-source on-state voltage | I _D = 3A, V _{GS} = 10V | — | 3.0 | 3.9 | V |
| y _{fs} | Forward transfer admittance | I _D = 3A, V _{DS} = 10V | 3.0 | 5.0 | — | S |
| C _{iss} | Input capacitance | V _{DS} = 25V, V _{GS} = 0V, f = 1MHz | — | 1100 | — | pF |
| C _{oss} | Output capacitance | | — | 125 | — | pF |
| C _{rss} | Reverse transfer capacitance | | — | 17 | — | pF |
| t _d (on) | Turn-on delay time | | V _{DD} = 200V, I _D = 3A, V _{GS} = 10V, R _{GEN} = R _{GS} = 50Ω | — | 30 | — |
| t _r | Rise time | — | | 30 | — | ns |
| t _d (off) | Turn-off delay time | — | | 100 | — | ns |
| t _f | Fall time | — | | 35 | — | ns |
| V _{SD} | Source-drain voltage | I _S = 3A, V _{GS} = 0V | — | 1.5 | 2.0 | V |
| R _{th} (ch-c) | Thermal resistance | Channel to case | — | — | 3.57 | °C/W |


PERFORMANCE CURVES

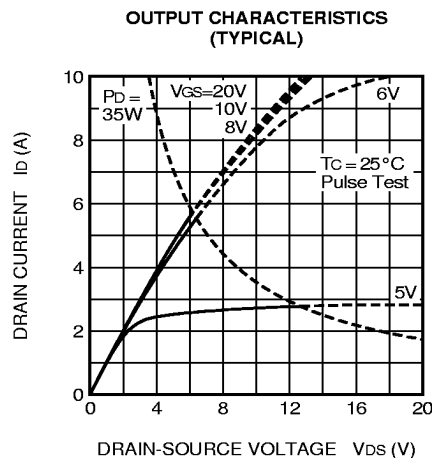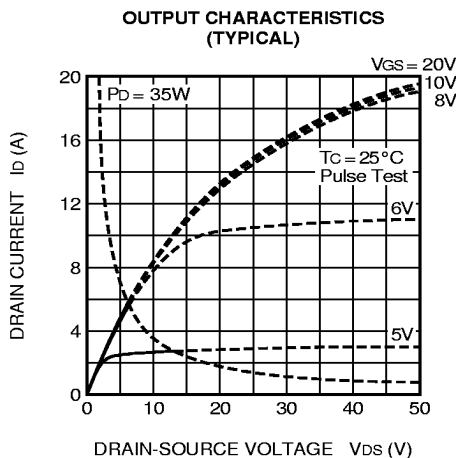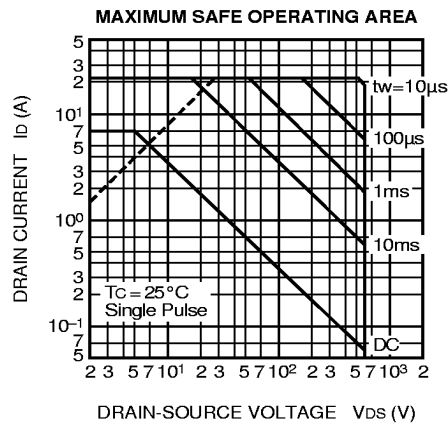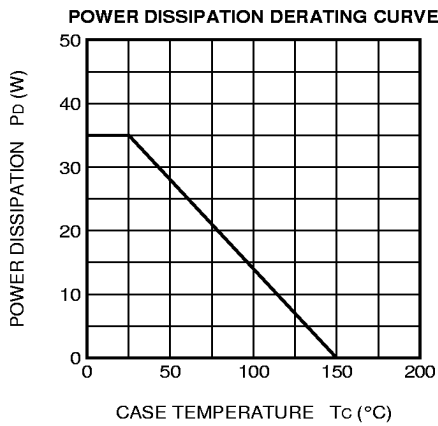


FS7KM-12

HIGH-SPEED SWITCHING USE


ON-STATE VOLTAGE VS. GATE-SOURCE VOLTAGE (TYPICAL)

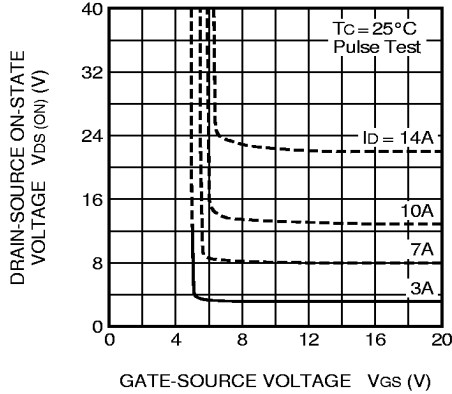


ON-STATE RESISTANCE VS. DRAIN CURRENT (TYPICAL)

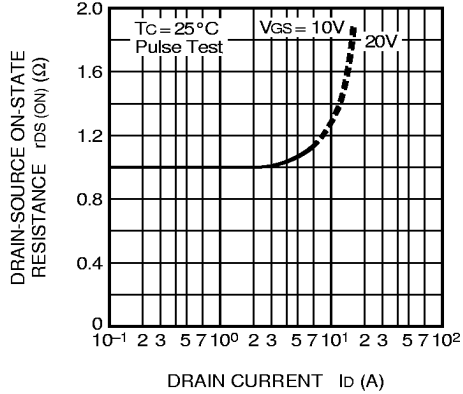


TRANSFER CHARACTERISTICS (TYPICAL)

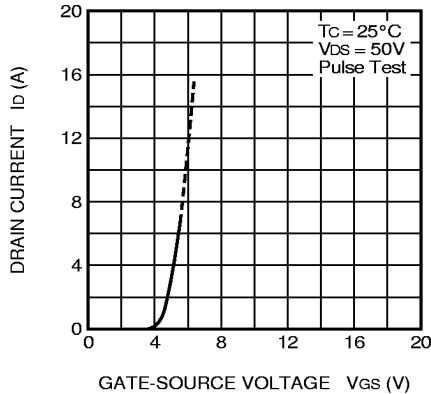

FORWARD TRANSFER ADMITTANCE VS. DRAIN CURRENT (TYPICAL)

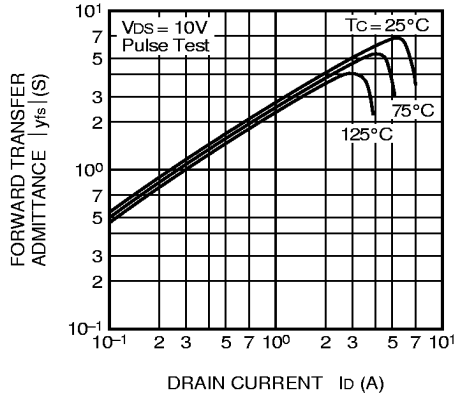

CAPACITANCE VS. DRAIN-SOURCE VOLTAGE (TYPICAL)

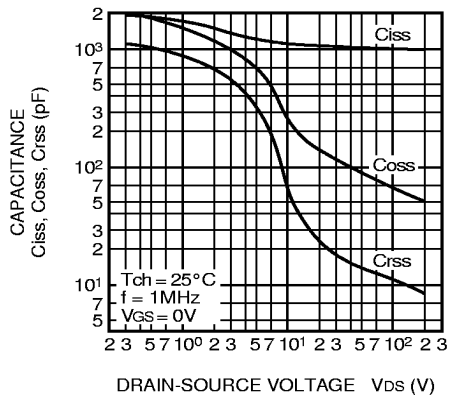

SWITCHING CHARACTERISTICS (TYPICAL)

