

Bulletin PD-20593 rev. A 03/02

# International IOR Rectifier

## MBR340

SCHOTTKY RECTIFIER

3.0 Amp


### Major Ratings and Characteristics

Characteristics	MBR340	Units
$I_{F(AV)}$ Rectangular waveform	3.0	A
$V_{RRM}$	30/40	V
$I_{FSM}$ @ $t_p=5\mu s$ sine	430	A
$V_F$ @3Apk, $T_J=25^\circ C$	0.6	V
$T_J$	-40to150	$^\circ C$

### Description/Features

The MBR340 axial leaded Schottky rectifier has been optimized for very low forward voltage drop, with moderate leakage. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- Low profile, axial leaded outline
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Very low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

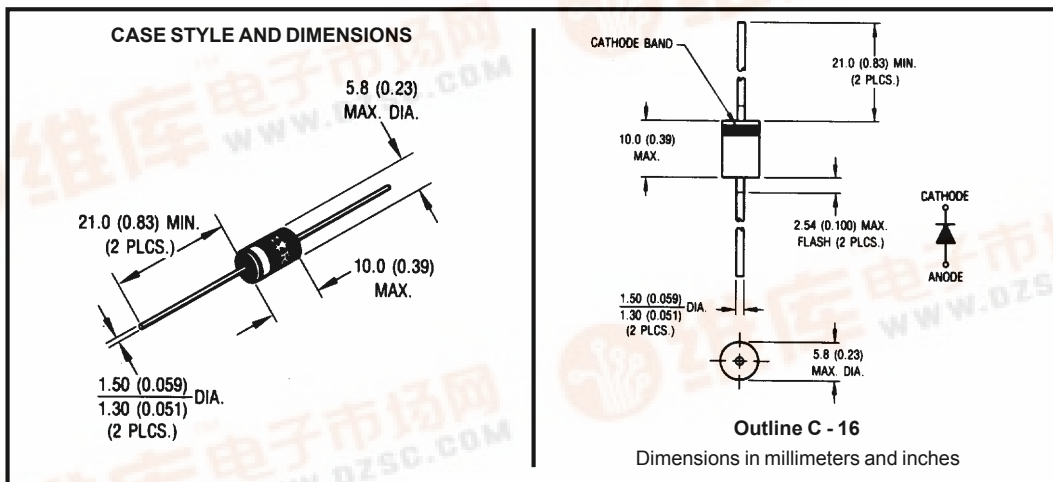

## MBR340

Bulletin PD-20593 rev. A 03/02

International  
 Rectifier

### Voltage Ratings

Part number	MBR340
$V_R$ Max. DC Reverse Voltage (V)	40
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)	

### Absolute Maximum Ratings

Parameters	MBR340	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 4	3.0	A	50% duty cycle @ $T_C = 92^\circ\text{C}$ , rectangular waveform
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 6	430	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse
	80		10ms Sine or 6ms Rect. pulse
$E_{AS}$ Non-Repetitive Avalanche Energy	8.0	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 1$ Amps, $L = 5$ mH
$I_{AR}$ Repetitive Avalanche Current	1.0	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

### Electrical Specifications

Parameters	MBR340	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop * See Fig. 1 (1)	0.5	V	@ 1.0A
	0.6	V	@ 3.0A
	0.85	V	@ 9.4A
	0.37	V	@ 1.0A
	0.49	V	@ 3.0A
	0.72	V	@ 9.4A
$I_{RM}$ Max. Reverse Leakage Current * See Fig. 2 (1)	0.6	mA	$T_J = 25^\circ\text{C}$
	8	mA	$T_J = 100^\circ\text{C}$
	20	mA	$T_J = 125^\circ\text{C}$
$C_T$ Typical Junction Capacitance	190	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	9.0	nH	Measured lead to lead 5mm from package body
$dv/dt$ Max. Voltage Rate of Change	10000	V/ $\mu\text{s}$	(Rated $V_R$ )

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

Parameters	MBR340	Units	Conditions
$T_J$ Max. Junction Temperature Range (*)	-40 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-40 to 150	$^\circ\text{C}$	
$R_{thJL}$ Typical Thermal Resistance Junction to Lead (**)	28	$^\circ\text{C}/\text{W}$	DC Operation (* See Fig. 4)
wt Approximate Weight	1.2(0.042)	g(oz.)	
Case Style	C-16		

(\*)  $\frac{dP_{tot}}{dT_J} < \frac{1}{R_{th(j-a)}}$  thermal runaway condition for a diode on its own heatsink

(\*\*) Mounted 1 inch square PCB, thermal probe connected to lead 2mm from package

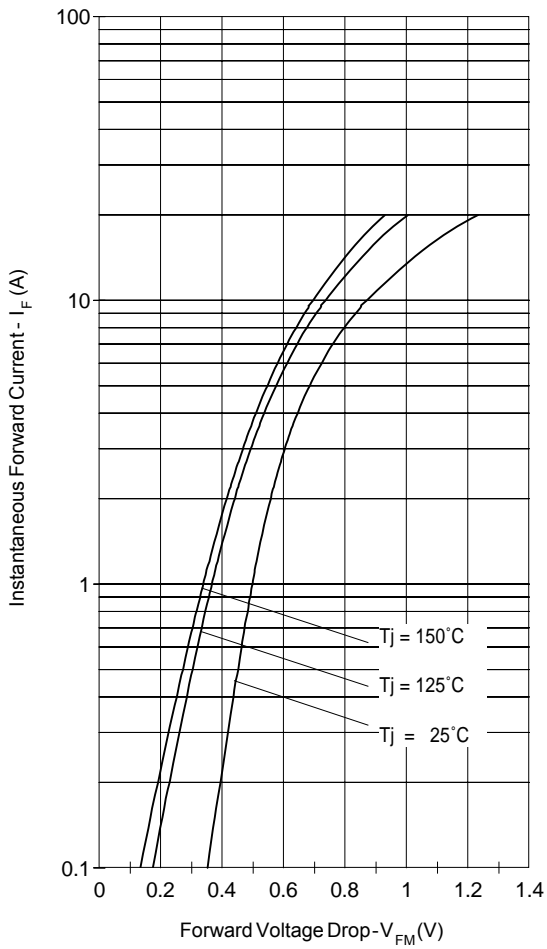


Fig. 1 - Max. Forward Voltage Drop Characteristics

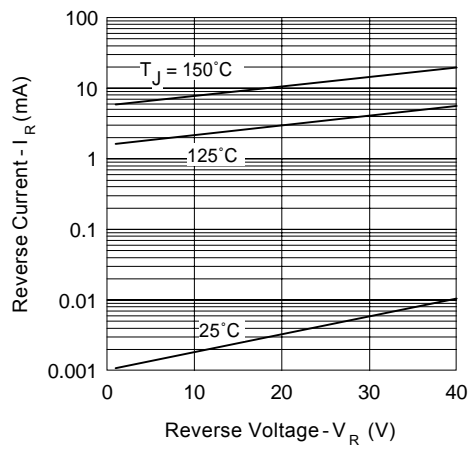


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage



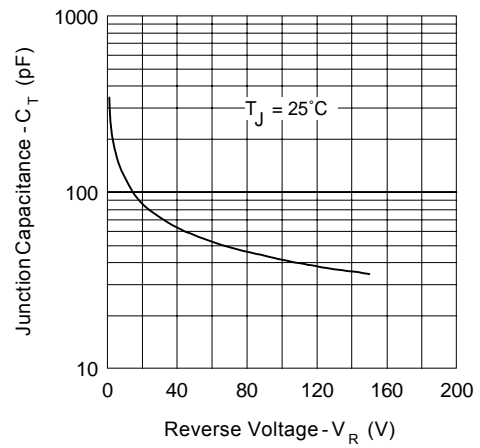



Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

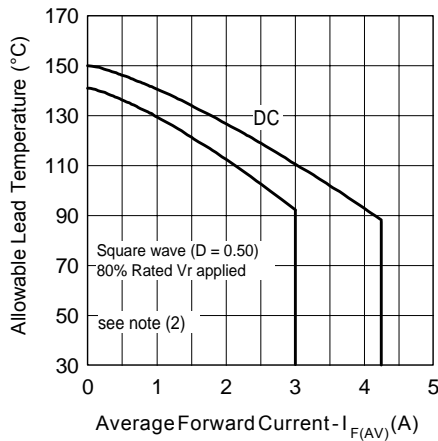

**Fig. 4 - Max. Allowable Lead Temperature Vs. Average Forward Current**

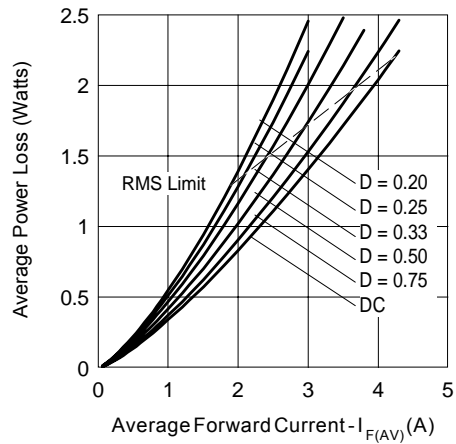

**Fig. 5-Forward Power Loss Characteristics**

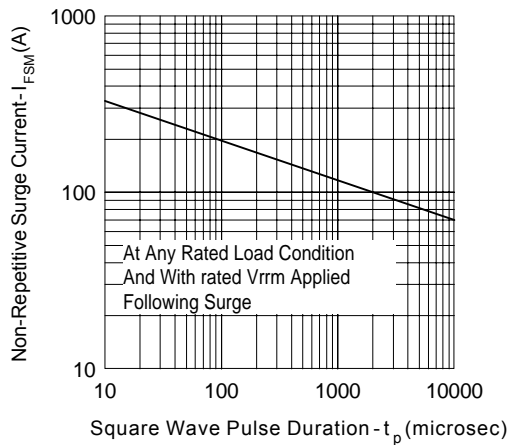

**Fig. 6 - Max. Non-Repetitive Surge Current**

(2) Formula used:  $T_c = T_j - (Pd + Pd_{REV}) \times R_{thJC}$ ;

$Pd$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$Pd_{REV}$  = Inverse Power Loss =  $V_{R1} \times I_R (1 - D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$

### Ordering Information Table

<b>Device Code</b>	<b>MBR</b>	<b>3</b>	<b>40</b>	<b>TR</b>
	①	②	③	④
<b>1</b>	-	Schottky MBR Series		
<b>2</b>	-	Current Rating: 3 = 3A		
<b>3</b>	-	Voltage Rating: 40 = 40V		
<b>4</b>	-	TR = Tape & Reel package (1200 pcs)		
	-	= Box package (500 pcs)		

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level.  
Qualification Standards can be found on IR's Web site.