

372 0846


HIGHLY ELECTRIC CO., LTD


TYPE VT MICRO SWITCH

(VT16061C)

■ **Characteristics:**

Item	Standard
Rating	16(4) A 250VAC; 15A 250VAC
Conforming to standards	IEC1058-1; UL1054
Contact resistance	15mΩ max.(Initial)
Insulation resistance	100MΩ min.(DC500V)
Dielectric strength	Between terminals of same polarity AC1000V (50/60Hz 1minute) Between each terminal and non-current-carrying rind parts AC2000V (50/60Hz 1minute)
Electrically life	100,000 operations
Operating force (OF)	120g
Pretravel (PT) Max	3.5mm
Overtravel (OT) Min	1.7mm
Movement differential (MD) Max	1.0mm
Operating position (OP)	20.8±1.2mm
Terminal mode	C: 6.3x0.8 quick-connect terminal

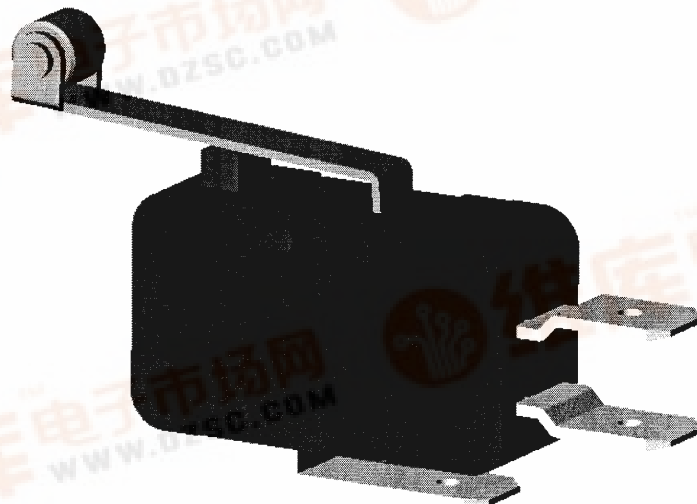

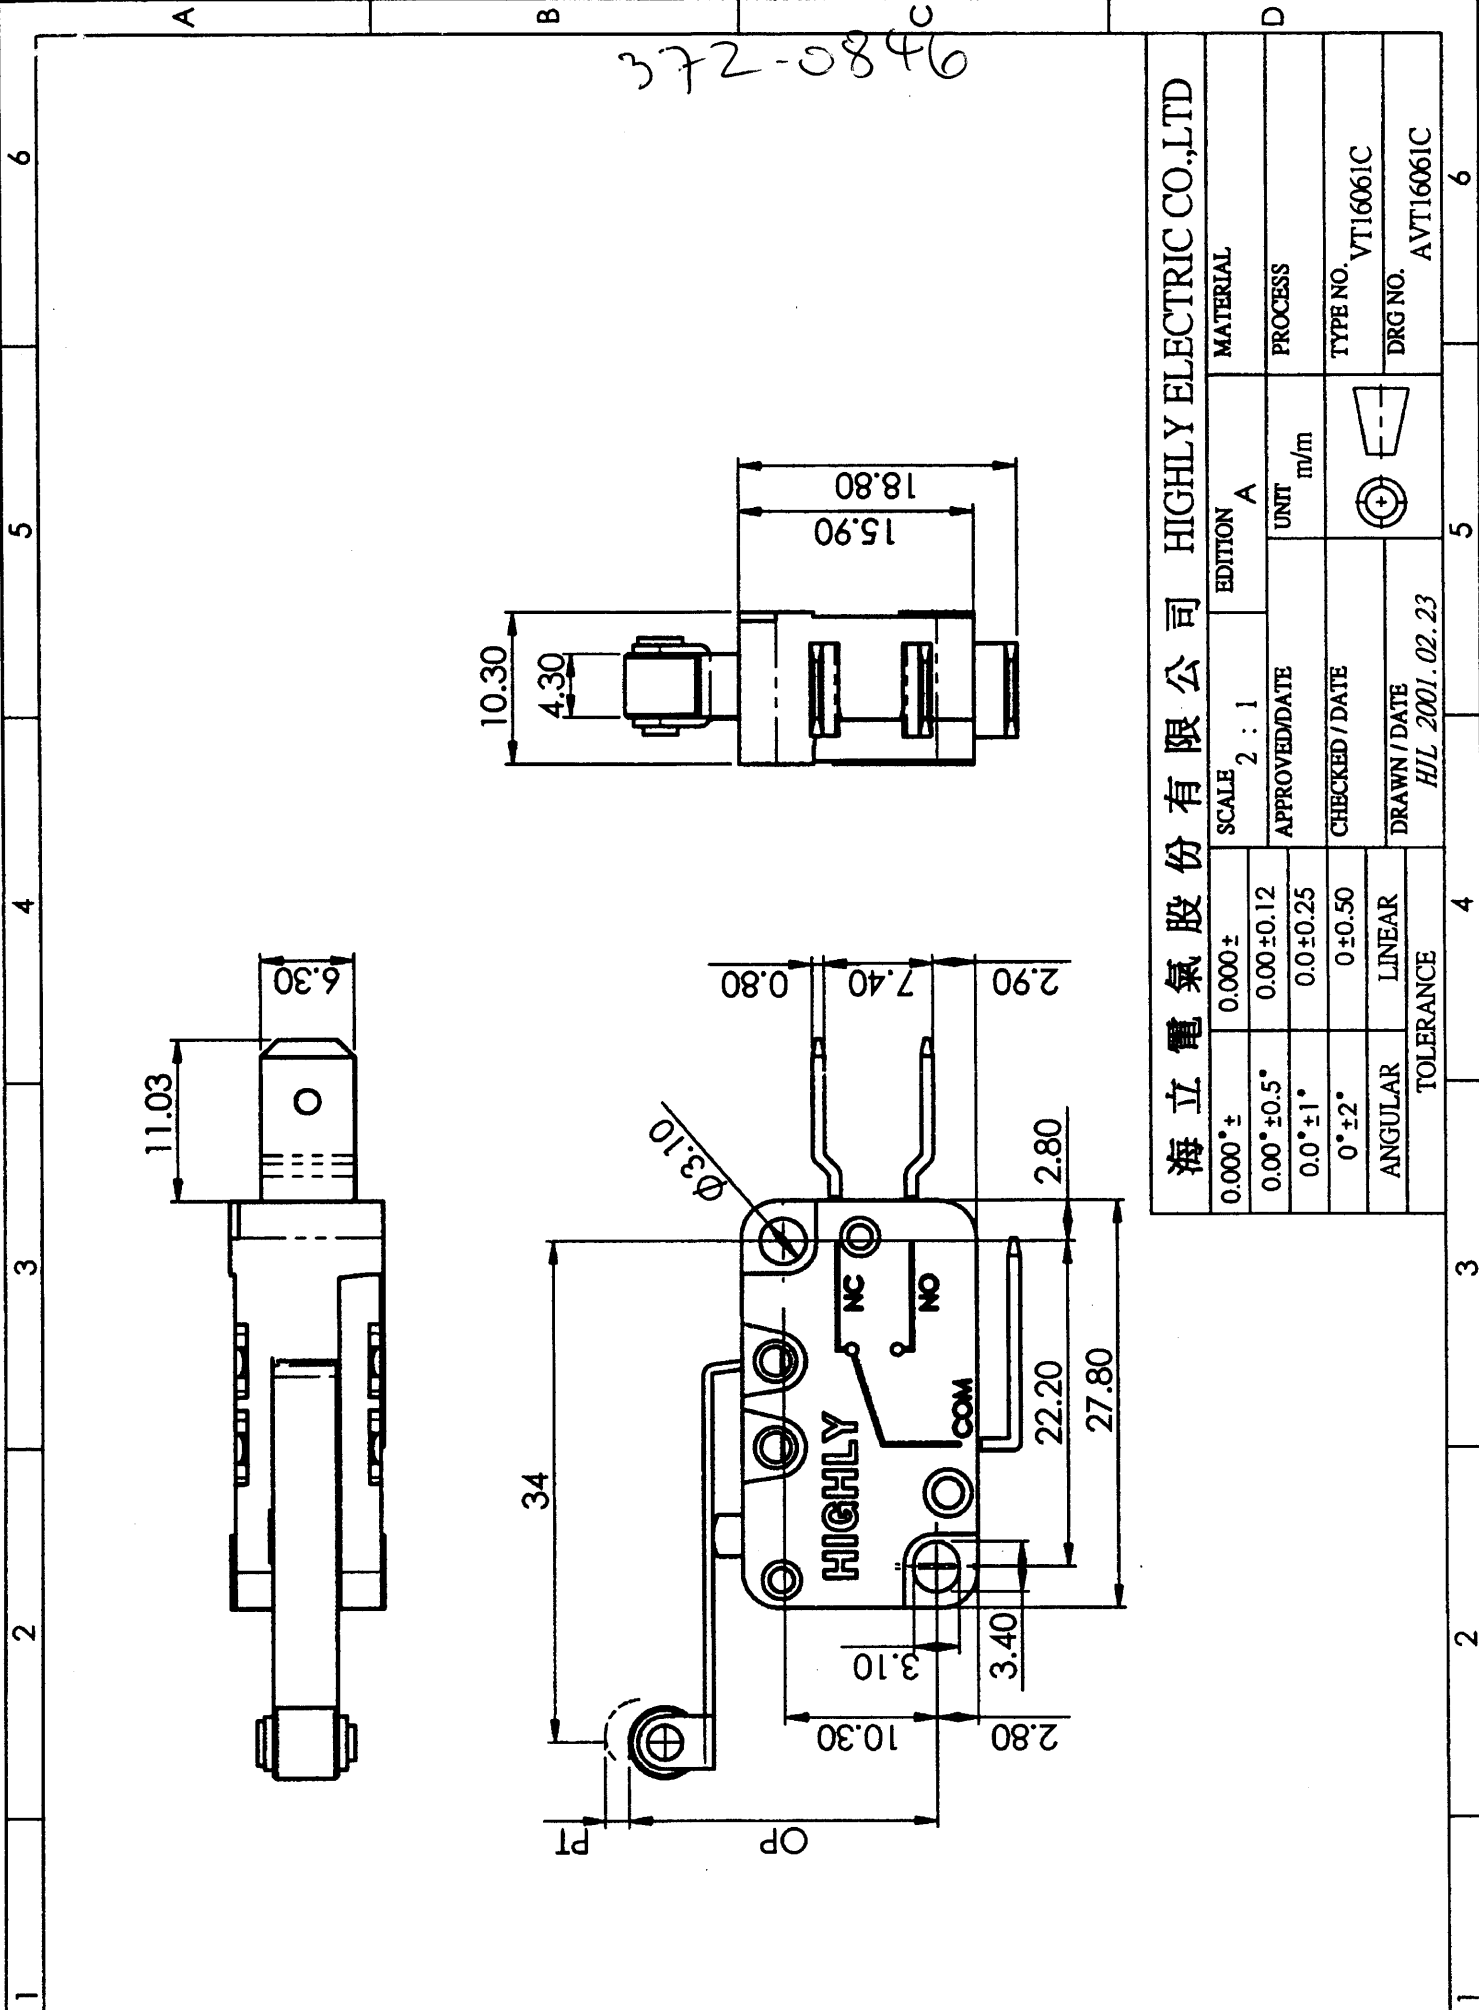

海立電氣股份有限公司		HIGHLY ELECTRIC CO.,LTD	
SCALE	2 : 1	EDITION	A
APPROVED/DATE		UNIT	m/m
CHECKED / DATE			
DRAWN / DATE	H/L 2001.02.23		
0.000 ±	0.000 ±	MATERIAL	
0.00° ±0.5°	0.00 ±0.12	PROCESS	
0.0° ±1°	0.0 ±0.25	TYPE NO.	VT16061C
0° ±2°	0 ±0.50	DRG NO.	AVT16061C
ANGULAR	LINEAR		
TOLERANCE			