

PRECISION BULK METAL® FOIL TECHNOLOGY

VISHAY MODELS VPR220 AND VPR221

Precision Foil Power Resistors in TO 220 Configuration




Models VPR220 AND VPR221, made from Vishay Bulk Metal® foil, offer low TCR, high stability, tight tolerance and fast response time in a small, molded resistor. Model VPR220 is a 2 lead device. Model VPR221 is a 4 lead Kelvin connected device. The 4 lead version is highly recommended for precision applications requiring ohmic values of 100R or less.

FEATURES

- Power: 8 watts chassis mounted (per MIL-R-39009)
- Load Life Stability: $\pm 0.05\%$ maximum ΔR at rated power and temperature for 2,000 hours
- Temperature Coefficient of Resistance: to $\pm 5 \text{ ppm}/^\circ\text{C}$
- Resistance Range: 0.5 to 10K Ω
- Tolerance: To $\pm 0.01\%$
- Low Thermal EMF: $0.15 \mu\text{V}/^\circ\text{C}$ maximum (lead effect)
- Non-Inductive Construction
- Heat sink is Isolated

FIGURE 1 - VPR220 DIMENSIONS

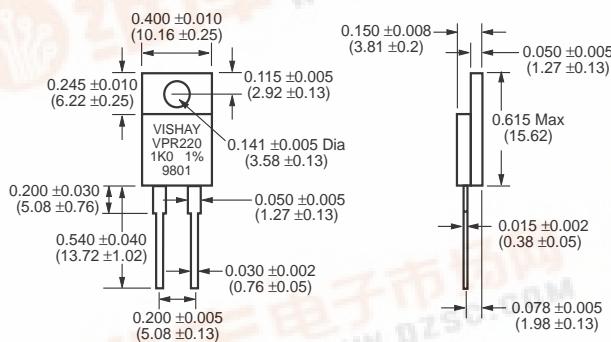


Resistance Range (Ω)	Tightest Resistance Tolerance	TCR*
50 to 10K	$\pm 0.01\%$	$\pm 5 \text{ ppm}/^\circ\text{C}$
25 to <50	$\pm 0.02\%$	$\pm 7 \text{ ppm}/^\circ\text{C}$
10 to <25	$\pm 0.05\%$	$\pm 10 \text{ ppm}/^\circ\text{C}$
5 to <10	$\pm 0.1\%$	$\pm 13 \text{ ppm}/^\circ\text{C}$

Weight = 1 gm Max.

* Maximum specifications.

Lower values available but not recommended due to high TCR.

FIGURE 2 - VPR221 DIMENSIONS

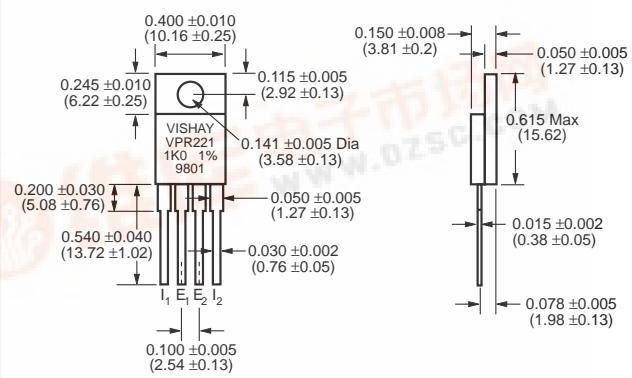

Resistance Range (Ω)	Tightest Resistance Tolerance	TCR*
10 to 500	$\pm 0.01\%$	$\pm 5 \text{ ppm}/^\circ\text{C}$
1 to <10	$\pm 0.02\%$	$\pm 5 \text{ ppm}/^\circ\text{C}$
0.5 to <1	$\pm 0.05\%$	$\pm 5 \text{ ppm}/^\circ\text{C}$

Weight = 1.2 gms Max.

* Maximum specifications.

Higher values available.

0.1 Ohms Available soon.



VISHAY MODELS VPR220 AND VPR221

Precision Foil Power Resistors in TO 220 Configuration

THROUGH HOLE


TABLE 1 - SPECIFICATIONS

Load Life Stability at 2,000 hrs	$\pm 0.05\%$ max ΔR under full rated power @ $+25^\circ\text{C}$
Shelf Life Stability	$\pm 0.0025\% \Delta R/\text{yr}$
Power Rating @ $+25^\circ\text{C}$	8 watts or 3 amps ² on heat sink ³ 1.5 watts or 3 amps ² in free air <i>Further derating not necessary.</i>
Current Noise	$< 0.010 \mu\text{V}$ (rms)/volt of applied voltage (-40 dB)
High Frequency Operation Rise/Decay Time Inductance ⁴ (L) Capacitance (C)	0.2 ns @ 1Ω 0.1 μH maximum: 0.03 μH typical ¹ 1.0 pF maximum: 0.5 pF typical ¹
Voltage Coefficient ⁵	$< 0.1 \text{ ppm/V}$
Operating Temperature Range	-55°C to $+150^\circ\text{C}$
Maximum Working Voltage	300 V. Not to exceed power rating.
Thermal EMF ⁶	0.15 $\mu\text{V}/^\circ\text{C}$ maximum (lead effect)

NOTES:


1. Maximum is 1.0% A.Q.L. standard for all specifications except TCR. Typical is a designer's reference which represents that 85% of the units supplied, over a long period of time, will be at least the figure shown or better.
 2. Whichever is lower.
 3. Heat sink chassis dimensions and requirements per MIL-R-39009/1B:
- | Dimension | Inches | mm |
|-----------|--------|-------|
| L | 6.00 | 152.4 |
| W | 4.00 | 101.6 |
| H | 2.00 | 50.8 |
| T | 0.04 | 1.0 |
4. Inductance (L) due mainly to the leads.
 5. The resolution limit of existing test equipment (within the measurement capability of the equipment, "essentially zero").
 6. $\mu\text{V}/^\circ\text{C}$ relates to EMF due to lead temperature difference.

FIGURE 3 - VPR221S DIMENSIONS

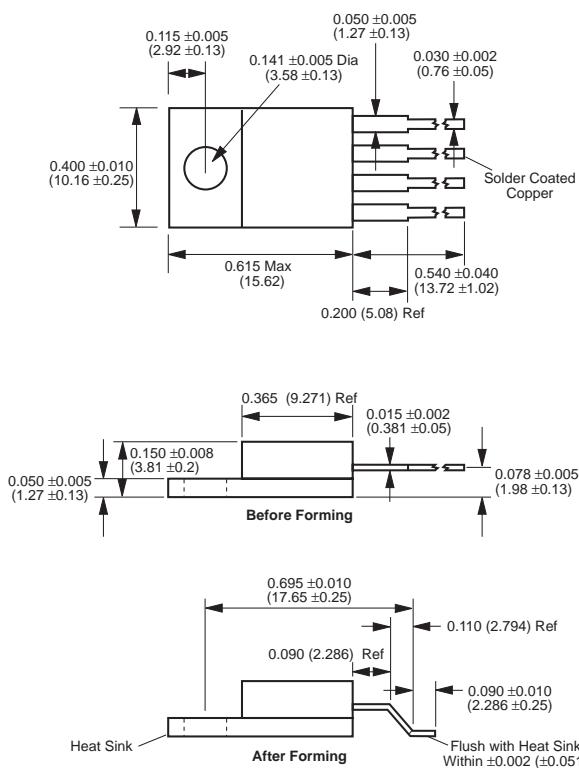

VPR220S dimensions similar.

FIGURE 4 - POWER DERATING CURVE

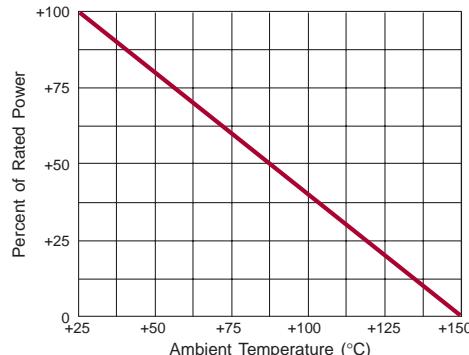

HOW TO ORDER VPR220 AND VPR221 PARTS:

Specify Vishay VPR220 or VPR221 resistors as follows:

Example: **VPR221** **5R0000** **1.0%**
 Model No. Resistance Value Tolerance

Specify Vishay VPR220S or VPR221S for surface mount resistors as follows:

Example: **VPR221S** **5R0000** **1.0%**
 Model No. Resistance Value Tolerance

Resistance value, in ohms, is expressed by a series of 6 characters, 5 of which represent significant digits while the 6th is a dual purpose letter that designates both the multiplier and the location of the comma or decimal.

Resistance Range	Letter Designator	Multiplier Factor	Example
0.5 Ω to $< 1\text{ K}\Omega$	R	x1	100R01 = 100.01 Ω
1K Ω to 10K Ω	K	x10 ³	5K2310 = 5,231 Ω