

TOSHIBA


TMP88PS76

CMOS 8-Bit Microcontroller

TMP88PS76F

The TMP88PS76 are the high-speed and high performance 8-bit single chip microcomputers which built in a program storage area (64 Kbyte) and the One-Time PROM of vector table storage area (256 byte). The TMP88PS76 is pin compatible with the TMP88CP76/S76. The operations possible with the TMP88PS76 can be performed by writing programs to PROM. The TMP88PS76 can write and verify in the same way as the TC571000 an EPROM programmer.

Part No.	OTP	RAM	Package	Adaptor Socket
TMP88PS76F	64 Kbyte + 256 byte	2 Kbyte	P-QFP80-1420-0.80B	BM11157

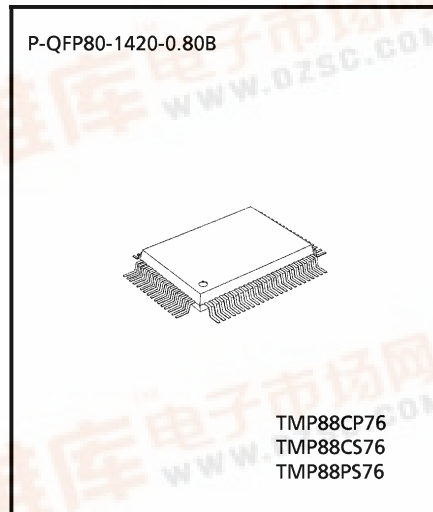


000707EBA1

- For a discussion of how the reliability of microcontrollers can be predicted, please refer to Section 1.3 of the chapter entitled Quality and Reliability Assurance / Handling Precautions.
- TOSHIBA is continually working to improve the quality and reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to comply with the standards of safety in making a safe design for the entire system, and to avoid situations in which a malfunction or failure of such TOSHIBA products could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent TOSHIBA products specifications. Also, please keep in mind the precautions and conditions set forth in the "Handling Guide for Semiconductor Devices," or "TOSHIBA Semiconductor Reliability Handbook" etc..
- The TOSHIBA products listed in this document are intended for usage in general electronics applications (computer, personal equipment, office equipment, measuring equipment, industrial robotics, domestic appliances, etc.). These TOSHIBA products are neither intended nor warranted for usage in equipment that requires extraordinarily high quality and/or reliability or a malfunction or failure of which may cause loss of human life or bodily injury ("Unintended Usage"). Unintended Usage include atomic energy control instruments, airplane or spaceship instruments, transportation instruments, traffic signal instruments, combustion control instruments, medical instruments, all types of safety devices, etc.. Unintended Usage of TOSHIBA products listed in this document shall be made at the customer's own risk.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.



Pin Assignments (Top View)

P-QFP80-1420-0.80B

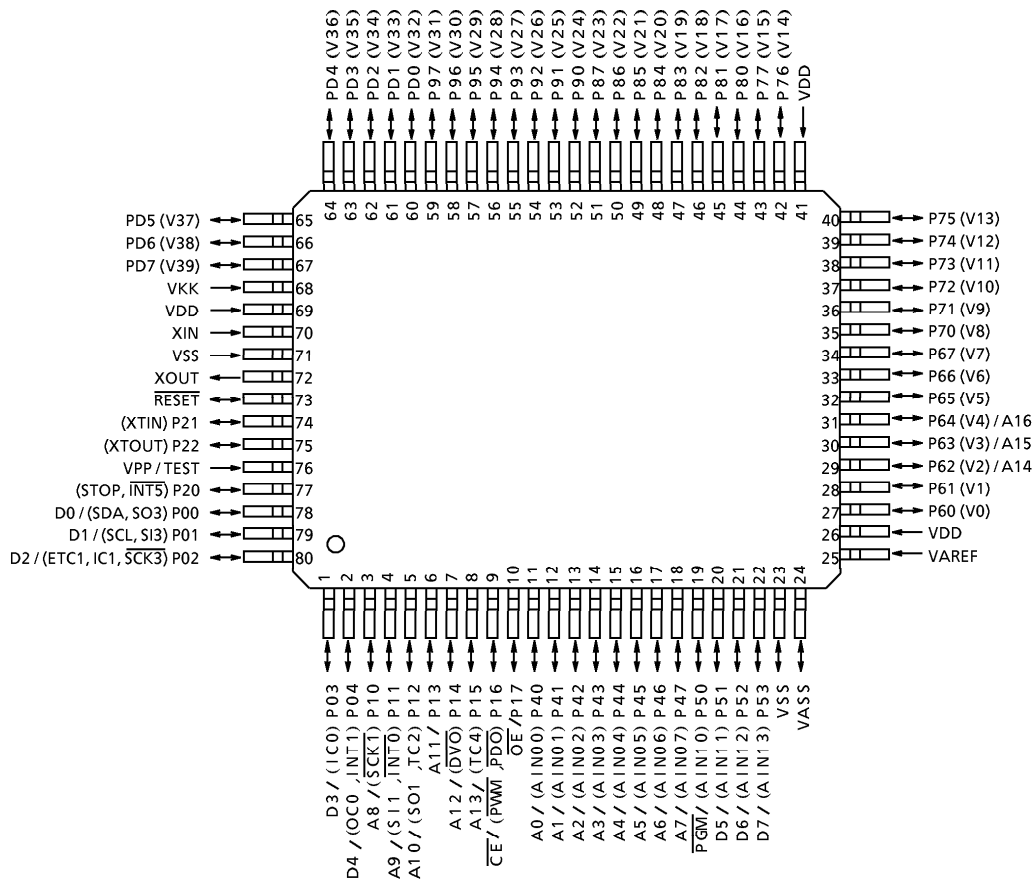

Note: All VDDs should be connected externally for keeping the same voltage level.

Pin Function

The TMP88PS76 has two modes: MCU and PROM.

(1) MCU mode

In this mode, the TMP88PS76 is pin compatible with the TMP88CP76/S76 (fix the TEST pin at low level).

(2) PROM mode

Pin Name (PROM mode)	Input/Output	Functions	Pin Name (MCU mode)
A16	Input	PROM address inputs	P64
A15 to A8			P63, P62, P15 to P10
A7 to A0			P47 to P40
D7 to D0	I/O	PROM data input/outputs	P53 to P51, P04 to P00
\overline{CE}	Input	Chip enable signal input (active low)	P16
\overline{OE}		Output enable signal input (active low)	P17
\overline{PGM}		Program mode single input	P50
VPP	Power supply	+ 12.75 V / 5 V (Program supply voltage)	TEST
VCC		+ 6.25 V / 5 V	VDD
GND		0 V	VSS
P07 to P05	Input	Pull-up with resistance for input processing	
P60		PROM mode setting pin. Be fixed at high level.	
P21			
P67, P66, P61		PROM mode setting pin. Be fixed at low level.	
\overline{RESET}			
P65	Output	Open	
P77 to P70			
P87 to P80			
P97 to P90			
PD7 to PD0			
XIN	Input	Connect an 8 MHz oscillator to stabilize the internal state.	
XOUT	Output		
VAREF	Power supply	0 V (GND)	
VASS			
VKK			Open

Operational Description

The configuration and functions of the TMP88PS76 are the same as those of the TMP88CP76/S76, except in that a one-time PROM is used instead of an on-chip mask ROM.

1. Operating Mode

The TMP88PS76 has two modes: MCU and PROM.

1.1 MCU Mode

The MCU mode is activated by fixing the TEST / VPP pin at low level.

In the MCU mode, operation is the same as with the TMP88CP76/S76 (the TEST / VPP pin cannot be used open because it has no built-in pull-down resistance).

1.1.1 Program memory

The TMP88PS76 has a 64 Kbyte (addresses 04000_H to 13FFF_H in the MCU mode, addresses 00000_H to 0FFFF_H in the PROM mode) of program storage area and 256 byte (addresses FFF00 to FFFFF_H in the MCU mode, addresses 1FF00 to 1FFFF_H in the PROM mode) one-time PROM of vector table storage area.

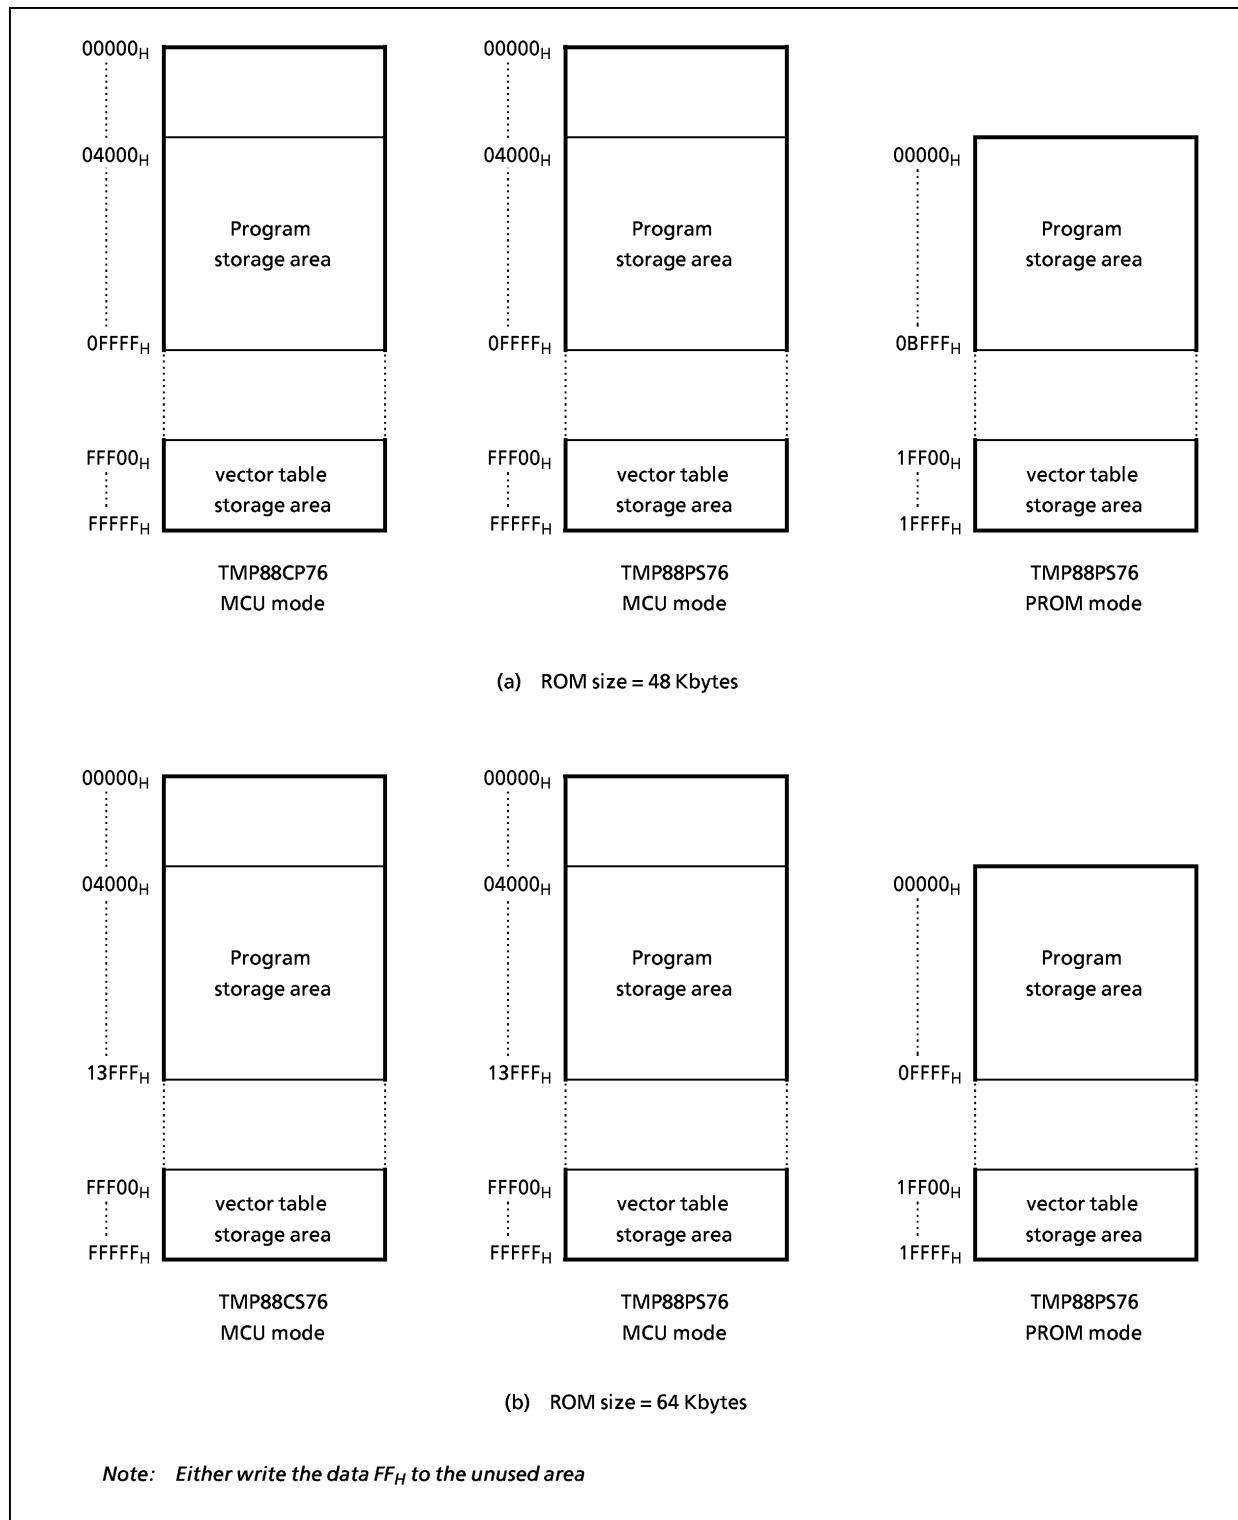


Figure 1-1. Program Storage Area

Electrical Characteristics

Absolute Maximum Ratings		(V _{SS} = 0 V)		
Parameter	Symbol	Pins	Ratings	Unit
Supply Voltage	V _{DD}		- 0.3 to 6.5	V
Program Voltage	V _{PP}	TEST/VPP	- 0.3 to 13.0	V
Input Voltage	V _{IN1}	P1, P2, P4, P5, XOUT, RESET	- 0.3 to V _{DD} + 0.3	V
	V _{IN2}	P0 port	- 0.3 to 5.5 V	
Output Voltage	V _{OUT1}	P1, P2, P4, P5, XOUT, RESET	- 0.3 to V _{DD} + 0.3	V
	V _{OUT2}	P0 port	- 0.3 to 5.5 V	
	V _{OUT3}	Source open drain ports	V _{DD} - 40 to V _{DD} + 0.3	
Output Current (Per 1 pin)	I _{OUT1}	P0, P1, P2, P4, P5 ports	3.2	mA
	I _{OUT2}	P6, P7, P80, 81 Ports	- 25	
	I _{OUT3}	P82 to P87, P9, PD ports	- 12	
Output Current (Total)	∑ I _{OUT1}	P1, P4, P5 ports	- 40	mA
	∑ I _{OUT2}	P0, P1, P2, P4, P5 ports	60	
	∑ I _{OUT3}	P6, P7, P8, P9, PD ports	- 120	
Power Dissipation [Topr = 25°C]	PD	Note2	1200	mW
Soldering Temperature (time)	Tslid		260 (10 s)	°C
Storage Temperature	Tstg		- 55 to 125	°C
Operating Temperature	Topr		- 30 to 70	°C

Note 1: The absolute maximum ratings are rated values which must not be exceeded during operation, even for an instant. Any one of the ratings must not be exceeded. If any absolute maximum rating is exceeded, a device may break down or its performance may be degraded, causing it to catch fire or explode resulting in injury to the user. Thus, when designing products which include this device, ensure that no absolute maximum rating value will ever be exceeded.

Note 2: Power Dissipation (PD) ; For PD, it is necessary to decrease -14.3 mW/°C. (Reference to TMP88CP76/S76)

Note 3: All VDDs should be connected externally for keeping the same voltage level.

Recommended Operating Conditions		(V _{SS} = 0 V, Topr = - 30 to 70°C)					
Parameter	Symbol	Pins	Conditions	Min	Max	Unit	
Supply Voltage	V _{DD}		fc = 12.5 MHz	NORMAL 1, 2 modes	4.5	5.5	V
				IDLE1, 2 modes			
			fs = 32.768 kHz	SLOW mode			
				SLEEP mode	2.0		
Input High Voltage	V _{IH1}	Except hysteresis input	V _{DD} ≥ 4.5 V	V _{DD} × 0.70	V _{DD}	V	
	V _{IH2}	Hysteresis input		V _{DD} × 0.75			
	V _{IH3}		V _{DD} < 4.5 V	V _{DD} × 0.90			
Input Low Voltage	V _{IL1}	Except hysteresis input	V _{DD} ≥ 4.5 V	V _{DD} × 0.30	V		
	V _{IL2}	Hysteresis input		V _{DD} × 0.25			
	V _{IL3}		V _{DD} < 4.5 V	V _{DD} × 0.10			
Clock Frequency	fc	XIN, XOUT	V _{DD} = 4.5 V to 5.5 V	1.0	12.5	MHz	
	fs	XTIN, XTOUT	V _{DD} = 2.7 V to 5.5 V	30.0	34.0	kHz	

Note: The recommended operating conditions for a device are operating conditions under which it can be guaranteed that the device will operate as specified. If the device is used under operating conditions other than the recommended operating conditions (supply voltage, operating temperature range, specified AC/DC values etc.), malfunction may occur. Thus, when designing products which include this device, ensure that the recommended operating conditions for the device are always adhered to.

D.C. Characteristics

 $(V_{SS} = 0\text{ V}, T_{opr} = -30\text{ to }70^{\circ}\text{C})$

Parameter	Symbol	Pins	Conditions	Min	Typ.	Max	Unit
Hysteresis Voltage	V_{HS}	Hysteresis input		–	0.9	–	V
Input Current	I_{IN1}	TEST	$V_{DD} = 5.5\text{ V}$ $V_{IN} = 5.5\text{ V} / 0\text{ V}$	–	–	± 2	μA
	I_{IN2}	Open drain ports, Tri-state ports					
	I_{IN3}	RESET, STOP					
Input Resistance	R_{IN3}	RESET		100	220	450	$\text{k}\Omega$
Pull-down Resistance	R_K	Source open drain ports	$V_{DD} = 5.5\text{ V}, V_{KK} = -30\text{ V}$	50	80	110	
Output Leakage Current	I_{LO1}	Sink open drain ports	$V_{DD} = 5.5\text{ V}, V_{OUT} = 5.5\text{ V}$	–	–	2	μA
	I_{LO2}	Source open drain ports	$V_{DD} = 5.5\text{ V}, V_{OUT} = -32\text{ V}$	–	–	–2	
	I_{LO3}	Tri-state ports	$V_{DD} = 5.5\text{ V}, V_{OUT} = 5.5\text{ V} / 0\text{ V}$	–	–	2	
Output High Voltage	V_{OH2}	Tri-state ports	$V_{DD} = 4.5\text{ V}, I_{OH} = -0.7\text{ mA}$	4.1	–	–	V
Output Low Voltage	V_{OL}	Except XOUT	$V_{DD} = 4.5\text{ V}, I_{OL} = 1.6\text{ mA}$	–	–	0.4	V
Output High current	I_{OH1}	P6, P7, P80, P81 port	$V_{DD} = 4.5\text{ V}, V_{OH} = 2.4\text{ V}$	–	–30	–	mA
	I_{OH2}	P82 to P87, P9, PD, PE, PF ports		–	–15	–	
Supply Current in NORMAL 1, 2 modes	I_{DD}		$V_{DD} = 5.5\text{ V}$ $V_{IN} = 5.3\text{ V} / 0.2\text{ V}$ $f_c = 12.5\text{ MHz}$ $f_s = 32.768\text{ kHz}$	–	15	22	mA
Supply Current in SLOW mode			$V_{DD} = 3.0\text{ V}$ $V_{IN} = 2.8\text{ V} / 0.2\text{ V}$ $f_s = 32.768\text{ kHz}$	–	30	60	
Supply Current in SLEEP mode			$V_{DD} = 5.5\text{ V}$ $V_{IN} = 5.3\text{ V} / 0.2\text{ V}$	–	15	30	μA
Supply Current in STOP mode			$V_{DD} = 5.5\text{ V}$ $V_{IN} = 5.3\text{ V} / 0.2\text{ V}$	–	0.5	10	

Note 1: Typical values show those at $T_{opr} = 25^{\circ}\text{C}$, $V_{DD} = 5\text{ V}$.

Note 2: Input Current I_{IN1}, I_{IN3} ; The current through resistor is not included, when the input resistor (pull-up/pull-down) is contained.

AD Conversion Characteristics


 $(V_{SS} = 0\text{ V}, V_{DD} = 4.5\text{ to }5.5\text{ V}, T_{opr} = -30\text{ to }70^{\circ}\text{C})$

Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Analog Reference Voltage	V_{AREF}		4.5	–	V_{DD}	V
	V_{ASS}					
Analog Reference Voltage Range	V_{AIN}		V_{ASS}	–	V_{AREF}	V
Analog Input Voltage	I_{REF}	$V_{AREF} = 5.5\text{ V}, V_{ASS} = 0.0\text{ V}$	–	0.5	1.0	mA
Nonlinearity Error		$V_{DD} = 5.0\text{ V}, V_{SS} = 0.0\text{ V}$	–	–	± 1	LSB
Zero Point Error		$V_{AREF} = 5.000\text{ V}$	–	–	± 1	
Full Scale Error		$V_{ASS} = 0.000\text{ V}$	–	–	± 1	
Total Error			–	–	± 2	


Note: Quantizing error is not contained in those errors.

A.C. Characteristics		(V _{SS} = 0 V, V _{DD} = 4.5 to 5.5 V, Topr = - 30 to 70°C)				
Parameter	Symbol	Conditions	Min	Typ.	Max	Unit
Machine Cycle Time	t _{cy}	In NORMAL1, 2 modes	0.32	-	10	μs
		In IDLE1, 2 modes				
		In SLOW mode	117.6	-	133.3	
		In SLEEP mode				
High Level Clock Pulse Width	t _{WCH}	For external clock operation (XIN input), f _c = 12.5 MHz	32	-	-	ns
Low Level Clock Pulse Width	t _{WCL}					
High Level Clock Pulse Width	t _{WSH}	For external clock operation (XTIN input), f _s = 32.768 kHz	15.2	-	-	μs
Low Level Clock Pulse Width	t _{WSL}					

Recommended Oscillating Conditions		(V _{SS} = 0 V, V _{DD} = 4.5 to 5.5 V, Topr = - 30 to 70°C)				
Parameter	Oscillator	Oscillation Frequency	Recommended Oscillator		Recommended Constant	
					C ₁	C ₂
High-frequency Oscillation	Ceramic Resonator	12.5 MHz	Murata	CSA12.5MTZ	30 pF	30 pF
		8 MHz	Murata	CSA8.00MTZ	30 pF	30 pF
	Crystal Oscillator	12.5 MHz	NDK	AT-51	10 pF	10 pF
Low-frequency Oscillation	Crystal Oscillator	32.768 kHz	NDK	MX-38T	15 pF	15 pF



(1) High-frequency Oscillation












(2) Low-frequency Oscillation

Note: An electrical shield by metal shield plate on the IC package should be recommend able in order to prevent the device from the high electric fieldstress applied for continuous reliable operation.

Typical Characteristics

(Ta = 25°C)

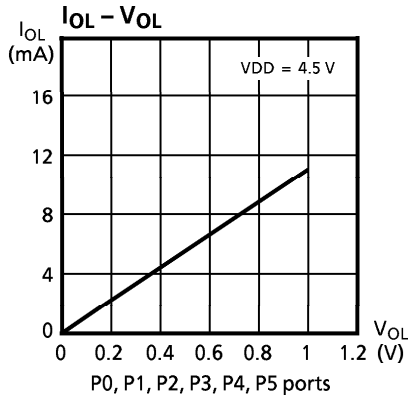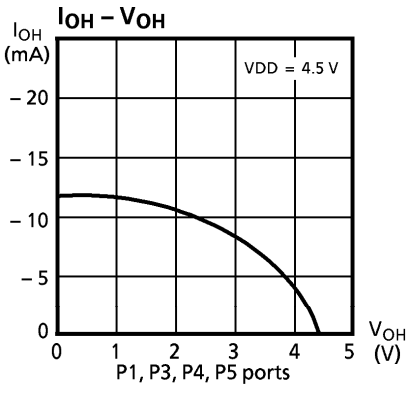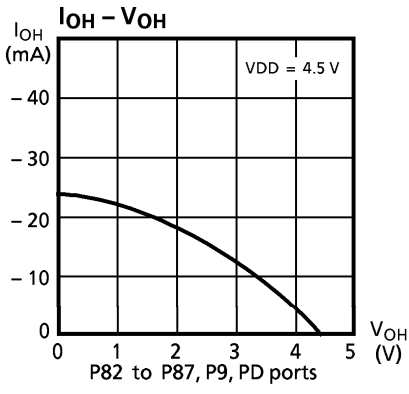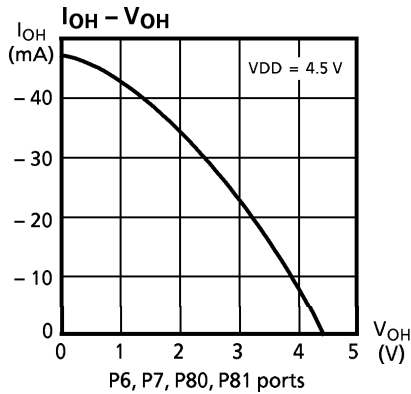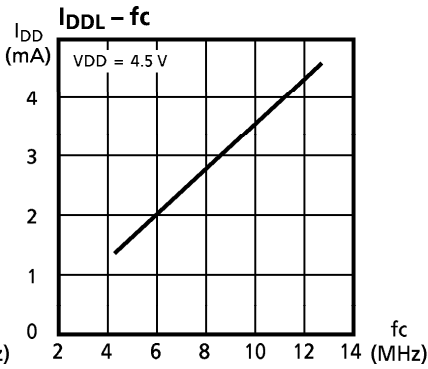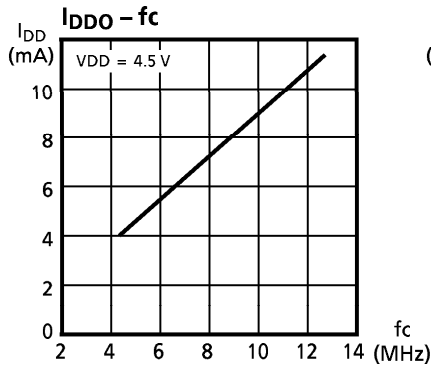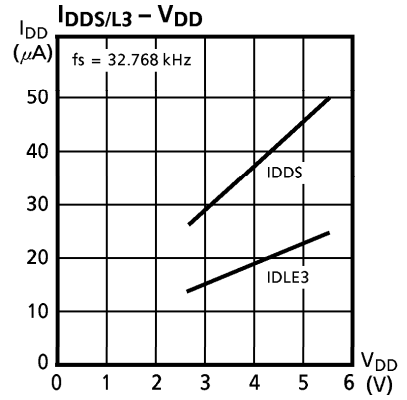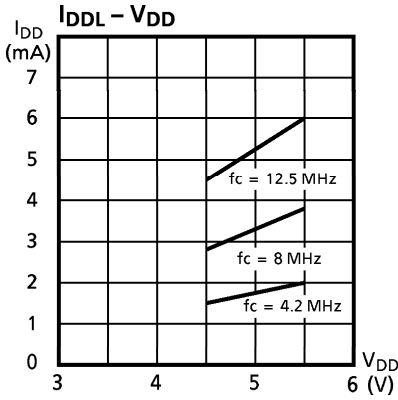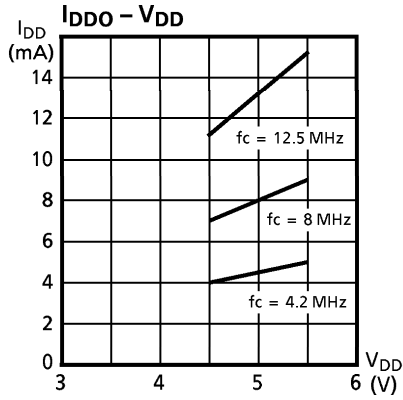


D.C./A.C. Characteristics (PROM mode) ($V_{SS} = 0\text{ V}$)

(1) Read Operation ($V_{DD} = 5.0 \pm 0.25\text{ V}$, $T_{opr} = 25 \pm 5^\circ\text{C}$)


PARAMETER	SYMBOL	CONDITIONS	Min	Typ.	Max	UNIT
Input High Voltage (A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V_{IH4}		$V_{DD} \times 0.7$	–	VDD	V
Input Low Voltage (A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V_{IL4}		0	–	0.8	V
Program Power Supply Voltage	V_{PP}		4.75	5.0	5.25	V
Address Access Time	t_{ACC}		–	$1.5\text{ }t_{cyc} + 300$	–	ns

Note: $t_{cyc} = 500\text{ ns}$ at 8 MHz

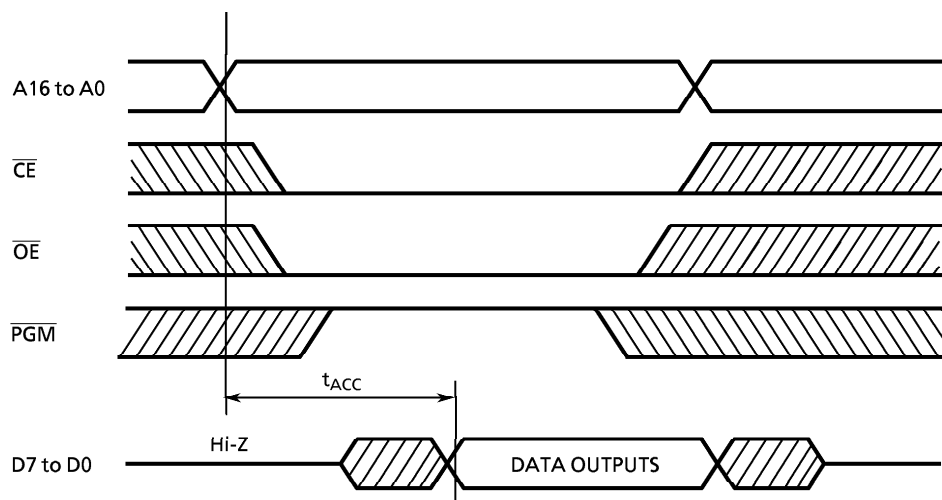

(2) High-Speed Programming Operation ($T_{opr} = 25 \pm 5^\circ\text{C}$, $V_{DD} = 6.25 \pm 0.25\text{ V}$)

PARAMETER	SYMBOL	CONDITIONS	Min	Typ.	Max	UNIT
Input High Voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V_{IH4}		$V_{DD} \times 0.7$	–	VDD	V
Input Low Voltage (D0 to D7, A0 to A16, $\overline{\text{CE}}$, $\overline{\text{OE}}$, $\overline{\text{PGM}}$)	V_{IL4}		0	–	0.8	V
Program Power Supply Voltage	V_{PP}		12.5	12.75	13.0	V
Initial Program Pulse Width	t_{PW}	$V_{DD} = 6.0\text{ V}$	0.095	0.1	0.105	ms

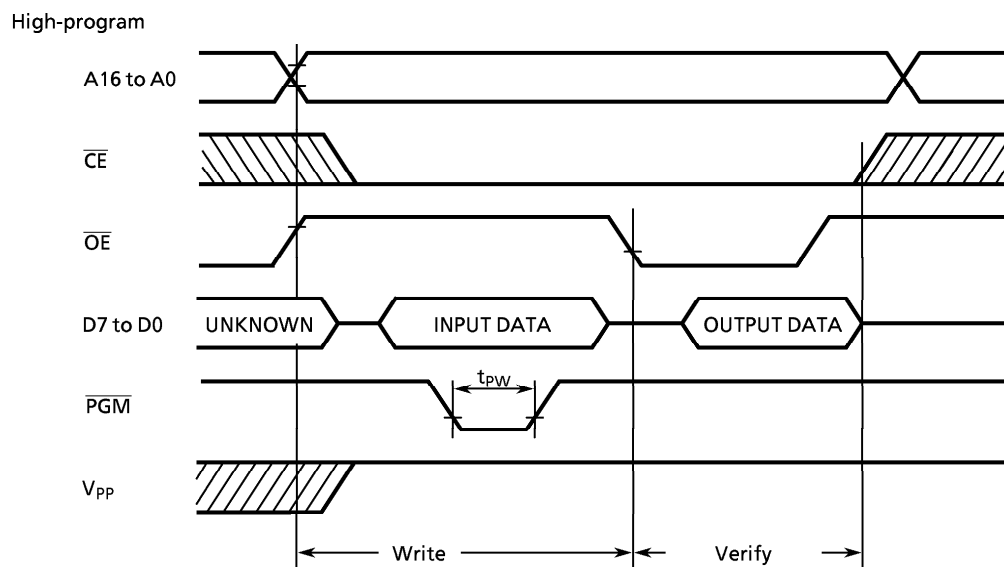

Note 1: When V_{CC} power supply is turned on or after, V_{pp} must be increased.

When V_{CC} power supply is turned off or before, V_{pp} must be decreased.

Note 2: The device must not be set to the EPROM programmer or picked up from it under applying the program voltage ($12.75\text{ V} \pm 0.5\text{ V}$) to the V_{pp} pin as the device is damaged.

Note 3: Be sure to execute the recommended programming mode with the recommended programming adaptor. If a mode or an adaptor except the above, the misoperation sometimes occurs.