



580 Pleasant Street
Watertown, MA 02472
Phone:(617) 926-0404
F A X : (617) 924-1235

UPFS120P


Features

- POWERMITE 3 Surface Mount Package
- MOSFET with Schottky Rectifier for reverse voltage blocking
- Single 3 leaded device replaces 2 individual components
- Integral Heat Sink / Locking Tabs
- Supplied in 16mm Tape and Reel – 6000 units/reel
- Superior Low Thermal and Electrical capability

**SURFACE MOUNT
P – CHANNEL
MOSKEY®**


Mechanical Characteristics

- Footprint Area of 16.51 mm²
- Case: Molded Epoxy
- Meets UL94VO at 1/8 inch
- Weight: 72 milligrams
- Lead and Mounting Temperatures: 260°C max for 10 seconds



Description

The MOSKEY® combines a MOSFET with a Schottky Rectifier to provide reverse blocking capability in a single three leaded package. This device is well suited for applications such as battery chargers and switching where the intrinsic source-drain diode is an undesirable feature.

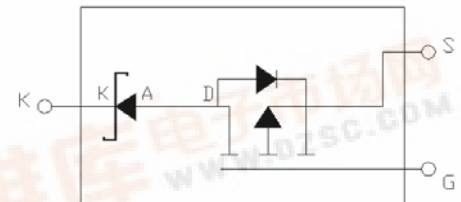

NOTE: $V_{KS} = V_{DS} (\text{Mosfet} + V_f (\text{Rectifier}))$

Absolute Maximum Ratings at 25°C

RATING	SYMBOL	VALUE	UNIT
Cathode-to-Source Voltage	VKSS	+/- 20	Vdc
Gate-to-Source Voltage	VGS	+/- 10	Vdc
Cathode Current:			
Continuous @ TA=25°C	IK	1.0	Adc
Single Pulsed	IKM	6.0	Apk
Total Power Dissipation	PD (1)	1.9	Watts
Storage Temperature	T stg	-55 to 150°C	°C
Operating Temperature	T op	-55 to 150°C	°C

Thermal Characteristics

Thermal Resistance:

Junction to Tab	Rjtab	20	°C/Watt
(1) Junction-to-ambient	Rja (1)	65	°C/Watt
(2) Junction-to-ambient	Rja (2)	150	°C/Watt

- (1) Mounted on 2" square by 0.06" thick FR4 board with a 1" x1" square 2 ounce copper pattern.
(2) Mounted on 0.06 thick FR4 board, using recommended footprint.




PRELIMINARY

Electrical Characteristics at 25°C

ELECTRICAL CHARACTERISTICS (TA = 25°C unless otherwise noted)			Min	Typ	Max	Units
Symbol	Parameter	Conditions				
OFF CHARACTERISTICS						
BVKSS	Cathode-Source Breakdown Voltage	VGS = 0V; IK = 250uA	20			V
IKSSF	Zero Gate Voltage Cathode Current: Forward	VKS = -16V, VGS = 0V			1	uA
IKSSR	Zero Gate Voltage Cathode Current: Reverse	VKS = +16V, VGS = 0V			1	mA
IGSS	Gate-Body Leakage Current	VGS = +/- 8V, VKS = 0V			100	nA
ON CHARACTERISTICS (pulsed 500us max, duty cycle < 2%)						
VGS(TH)	Gate Threshold Voltage	VKS ≥ VGS; IK = 250uA	1	1.9	3	V
DELTA VGS(TH)/TJ	Gate Threshold Voltage Temp Coefficient	IK = 250uA, Reference to 25°C		3.5		mV/°C
VKS (ON)	Static Cathode-Source On Voltage	VGS = 4.5 V; IK = 1A			750	mV
VKS (ON)	Static Cathode-Source On Voltage	VGS = 4.5 ; IK = 0.5A			550	mV
IK(ON)	On State Cathode Current	VGS = 4.5 V; VKS = 5V	3			A
Gfs	Forward Transconductance	VDS = 5V; IK = 0.5A		3		S
DYNAMIC CHARACTERISTICS						
Ciss	Input Capacitance	VKS = 15 V; VGS = 0V, F = 1MHz		165		pF
Coss	Output Capacitance	VKS = 15 V; VGS = 0V, F = 1MHz		60		pF
Crss	Reverse Transfer Capacitance	VKS = 15 V; VGS = 0V, F = 1MHz		25		pF
SWITCHING CHARACTERISTICS						
Td(ON)	Turn On Delay Time	VDD = 15V, IK = 1A, VGS = 10V, Rg = 6 Ω		8	20	ns
Tr	Turn On Rise Time	VDD = 15V, IK = 1A, VGS = 10V, Rg = 6 Ω		9	20	ns
Td(OFF)	Turn Off Delay time	VDD = 15V, IK = 1A, VGS = 10V, Rg = 6 Ω		14	30	ns
Tf	Turn Off Fall time	VDD = 15V, IK = 1A, VGS = 10V, Rg = 6 Ω		2	10	ns
Qg	Total Gate Charge	VDS = 15V, IK = 1A, VGS = 10V		3.5	5	nC
Qgs	Gate-Source Charge	VDS = 15V, IK = 1A, VGS = 10V		0.6		nC
Qgd	Gate-Cathode Charge	VDS = 15V, IK = 1A, VGS = 10V		0.8		nC

PRELIMINARY

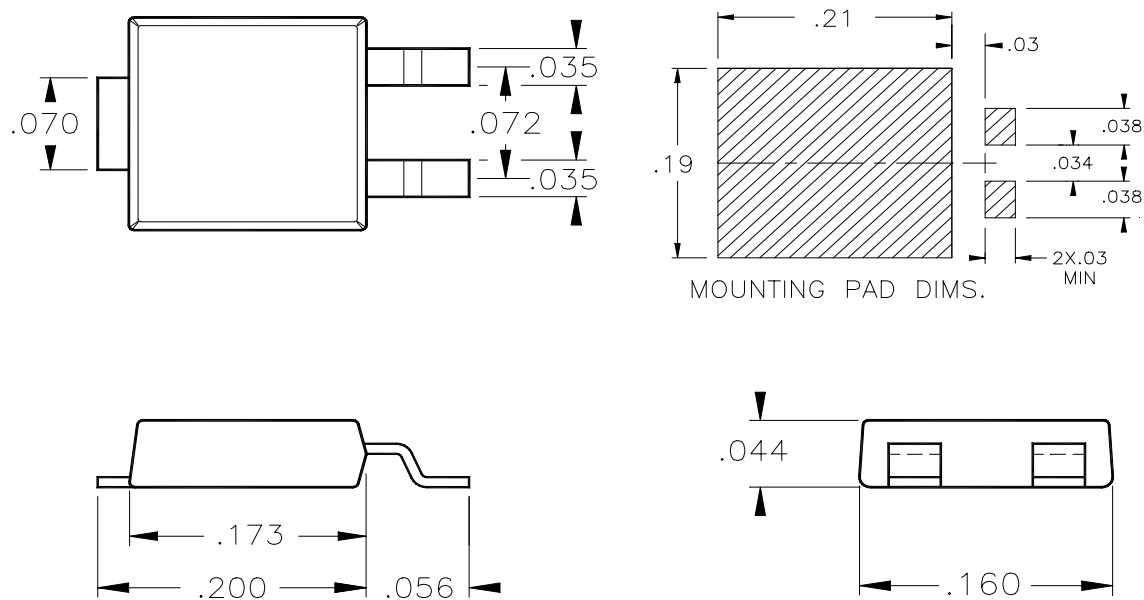

DIMENSIONS ARE NOMINAL INCHES

MECHANICAL SPECIFICATIONS