

Quartz Crystal Oscillator IC with Selectable Divider

■GENERAL DESCRIPTION

The NJU6311 is a fundamental quartz crystal oscillator, up to 50MHz.

The oscillation amplifier incorporates feedback resistor and capacitors (Cg, Cd), therefore, it requires no external component expect quartz crystal, and realizes very low standby current with NAND circuit.

The output frequency select 6-stage to use selectable switch IN1, IN2, and IN3, divided output are f_0 , $f_0/2$, $f_0/4$, $f_0/8$, $f_0/16$ and $f_0/32$.

The drivability of the 3-state output buffer is 16mA@5V, thus it can drive C-MOS load.

Furthermore, the package is Thin-VSP10.

■PACKAGE OUTLINE



NJU6311C-D





NJU6311RB2

■FEATURES

- Operating Voltage 2.0 to 5.5V
- Maximum Oscillation Frequency 50MHz
- Low Operating Current
- High Fan-out $I_{OH}/I_{OL}=6mA$ @2.5V
 $I_{OH}/I_{OL}=8mA$ @3.3V
 $I_{OH}/I_{OL}=16mA$ @5.0V
- Selectable Divider f_0 , $f_0/2$, $f_0/4$, $f_0/8$, $f_0/16$ and $f_0/32$
- Oscillation Stop and Output Stand-by Function
- 3-State Output Buffer
- Oscillation Capacitors Cg and Cd on-chip
- Package Outline Thin-Chip/TVSP-10
- C-MOS Technology

■PAD LOCATION



■SELECTABLE DIVIDER LOGIC

IN1	IN2	IN3	F _{OUT}
H	H	H	f_0
L	H	H	$f_0/2$
H	L	H	$f_0/4$
L	L	H	$f_0/8$
H	H	L	$f_0/16$
L	H	L	$f_0/32$
H	L	L	
L	L	L	

■COORDINATES

No	Pad Name	X	Y
1	CONT	-123	325
2	XT	-200	105
3	XT	-200	-130
4	V _{SS}	-221	-346
5	F _{OUT}	57	-325
6	IN1	221	-295
7	IN2	221	-60
8	IN3	221	160
9	V _{DD}	221	346


Starting Point: Chip Center Unit[um]

Chip Size: 0.7x0.95mm

Thin-Chip Thickness (-D): 200±20um

Pad Size: 90x90um

■BLOCK DIAGRAM

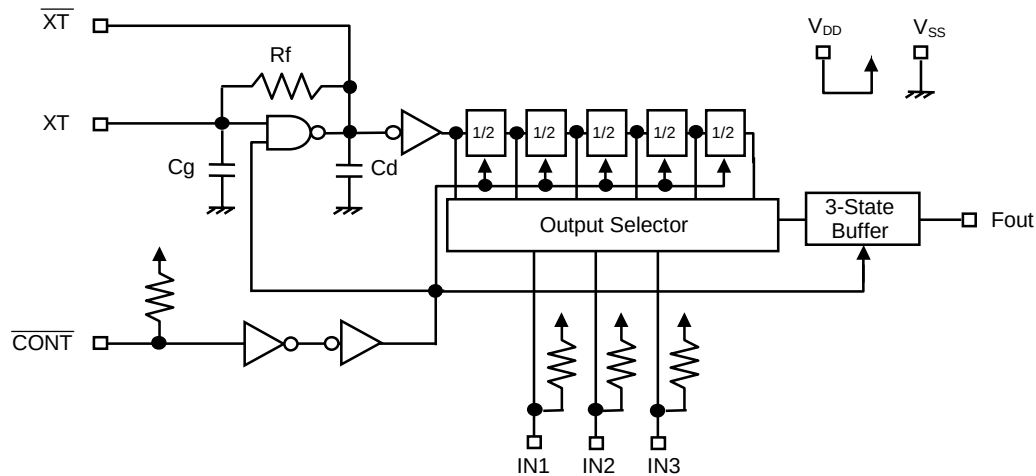

■TREMINAL DESCRIPTION

SYMBOL	FUNCTION			
CONT	Oscillation and 3-state Output Buffer Control			
	CONT	F _{OUT}		
	H or OPEN	Frequency Output corresponding to Selectable Divider		
	L	Oscillation Stop and High impedance Output		
XT	Quartz Crystal Connecting Terminals			
$\overline{\text{XT}}$				
V _{SS}	V _{SS} =0V			
F _{OUT}	Frequency Output			
IN1 IN2 IN3	Selectable Divider			
	IN1	IN2	IN3	F _{OUT}
	H	H	H	f _o
	L	H	H	f _o /2
	H	L	H	f _o /4
	L	L	H	f _o /8
	H	H	L	f _o /16
	L	H	L	f _o /32
	H	L	L	
	L	L	L	
	“H” or OPEN			
	V _{DD}	V _{DD} =2.5/3.3V/5.0V		

■ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

PARAMETER	SYMBOL	RATING	UNIT
Supply Voltage	V_{DD}	-0.5 to +7.0	V
Input Voltage	V_{IN}	$V_{SS}-0.5$ to $V_{DD}+0.5$	V
Output Voltage	V_O	-0.5 to $V_{DD}+0.5$	V
Input Current	I_{IN}	± 10	mA
Output Current	I_O	± 25	mA
Power Dissipation	P_D	320 (TVSP-10)	mW
Operating Temperature Range	T_{opr}	-40 to +85	°C
Storage Temperature Range	T_{stg}	-55 to +125	°C

Note1) If the supply voltage(V_{DD}) is less than 7.0V, the input voltage must not over the V_{DD} level though 7.0V is limit specified.

Note2) Decoupling capacitor should be connected between V_{DD} and V_{SS} due to the stabilized operation for the circuit.

Note3) The power dissipation is the maximum value at only the package.

■ELECTRICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Voltage	V_{DD}		2.0		5.5	V

(V_{DD}=2.5V, Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I_{DD}	fosc=16MHz, $C_L=15\text{pF}$			6	mA
Oscillation Stopping Current	I_{STB}	$\overline{\text{CONT}}=\text{IN1}=\text{IN2}=\text{IN3}=\text{V}_{SS}$, No load		4	10	uA
Stand-by Current	I_{st}	$\overline{\text{CONT}}=\text{XT}=\text{V}_{SS}$, No load Note4)			1	uA
Input Voltage	V_{IH}	$\overline{\text{CONT}}$, IN1, IN2, IN3	1.75		2.5	V
	V_{IL}	$\overline{\text{CONT}}$, IN1, IN2, IN3	0		0.75	V
Output Current	I_{OH}	$V_{OH}=2.25\text{V}$	6			mA
	I_{OL}	$V_{OL}=0.25\text{V}$	6			mA
Input Current	I_{IN}	$\overline{\text{CONT}}=\text{IN1}=\text{IN2}=\text{IN3}=0.8\text{V}_{DD}$		7.5	12.0	uA
		$\overline{\text{CONT}}=\text{IN1}=\text{IN2}=\text{IN3}=0.2\text{V}_{DD}$		1.2	2.0	uA
3-state Off Leakage Current	I_{OZ}	$\overline{\text{CONT}}=\text{V}_{SS}$, $F_{OUT}=\text{V}_{DD}$ or V_{SS}			± 0.1	uA
Feedback Resistance	R_f			255		kΩ
Internal Capacitor	C_g/C_d	fosc=16MHz		15/15		pF
Maximum Oscillation Frequency	F_{MAX}		50			MHz
Output Signal Symmetry	SYM	$C_L=15\text{pF}$, @ $V_{DD}/2$	45	50	55	%
		$C_L=30\text{pF}$, @ $V_{DD}/2$	40	50	60	
Output Signal Rise Time	t_r	$C_L=15\text{pF}$, 10% to 90%		2	4	ns
		$C_L=30\text{pF}$, 10% to 90%		4	8	
Output Signal Fall Time	t_f	$C_L=15\text{pF}$, 90% to 10%		2	4	ns
		$C_L=30\text{pF}$, 90% to 10%		4	8	
Output Disable time	T_{PLZ}	$C_L=15\text{pF}$, $R_{UP}=10\text{k}\Omega$			200	ns
Output Enable Time	T_{PZL}	$C_L=15\text{pF}$, $R_{UP}=10\text{k}\Omega$			200	ns

Note4) Excluding input current on $\overline{\text{CONT}}$ Terminal.

(V_{DD}=3.3V, Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I _{DD}	fosc=16MHz, C _L =30pF			8	mA
Oscillation Stopping Current	I _{STB}	CONT=IN1=IN2=IN3=V _{SS} , No load		8	20	uA
Stand-by Current	I _{st}	CONT=XT=V _{SS} , No load Note4)			1	uA
Input Voltage	V _{IH}	CONT, IN1, IN2, IN3	2.31		3.3	V
	V _{IL}	CONT, IN1, IN2, IN3	0		0.99	V
Output Current	I _{OH}	V _{OH} =2.97V	8			mA
	I _{OL}	V _{OL} =0.33V	8			mA
Input Current	I _{IN}	CONT= IN1=IN2=IN3=0.8V _{DD}		10.0	15.0	uA
		CONT= IN1=IN2=IN3=0.2V _{DD}		1.8	3.0	uA
3-state Off Leakage Current	I _{OZ}	CONT=V _{SS} , F _{OUT} = V _{DD} or V _{SS}			±0.1	uA
Feedback Resistance	R _f			255		kΩ
Internal Capacitor	C _g /C _d	fosc=16MHz		15/15		pF
Maximum Oscillation Frequency	F _{MAX}		50			MHz
Output Signal Symmetry	SYM	C _L =15pF, @V _{DD} /2	45	50	55	%
		C _L =30pF, @V _{DD} /2	45	50	55	
Output Signal Rise Time	tr	C _L =15pF, 10% to 90%		2	4	ns
		C _L =30pF, 10% to 90%		4	8	
Output Signal Fall Time	tf	C _L =15pF, 90% to 10%		2	4	ns
		C _L =30pF, 90% to 10%		4	8	
Output Disable time	T _{PLZ}	C _L =15pF, R _{UP} =10kΩ			150	ns
Output Enable Time	T _{PZL}	C _L =15pF, R _{UP} =10kΩ			150	ns

Note4) Excluding input current on CONT Terminal.

(V_{DD}=5.0V, Ta=25°C)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNIT
Operating Current	I _{DD}	fosc=16MHz, C _L =50pF			15	mA
Oscillation Stopping Current	I _{STB}	CONT=IN1=IN2=IN3=V _{SS} , No load		20	40	uA
Stand-by Current	I _{st}	CONT=XT=V _{SS} , No load Note4)			1	uA
Input Voltage	V _{IH}	CONT, IN1, IN2, IN3	3.5		5.0	V
	V _{IL}	CONT, IN1, IN2, IN3	0		1.5	V
Output Current	I _{OH}	V _{OH} =2.97V	16			mA
	I _{OL}	V _{OL} =0.33V	16			mA
Input Current	I _{IN}	CONT= IN1=IN2=IN3=0.8V _{DD}		27.0	40.0	uA
		CONT= IN1=IN2=IN3=0.2V _{DD}		5.5	8.0	uA
3-state Off Leakage Current	I _{OZ}	CONT=V _{SS} , F _{OUT} = V _{DD} or V _{SS}			±0.1	uA
Feedback Resistance	R _f			255		kΩ
Internal Capacitor	C _g /C _d	fosc=16MHz		15/15		pF
Maximum Oscillation Frequency	F _{MAX}		50			MHz
Output Signal Symmetry	SYM	C _L =15pF, @V _{DD} /2	45	50	55	%
		C _L =50pF, @V _{DD} /2	45	50	55	
Output Signal Rise Time	tr	C _L =15pF, 10% to 90%		2	4	ns
		C _L =50pF, 10% to 90%		4	8	
Output Signal Fall Time	tf	C _L =15pF, 90% to 10%		2	4	ns
		C _L =50pF, 90% to 10%		4	8	
Output Disable time	T _{PLZ}	C _L =15pF, R _{UP} =10kΩ			100	ns
Output Enable Time	T _{PZL}	C _L =15pF, R _{UP} =10kΩ			100	ns


Note4) Excluding input current on CONT Terminal.

MEASUREMENT CIRCUITS


(1) Output Signal Symmetry



(2) Output Signal Rise/Fall Time

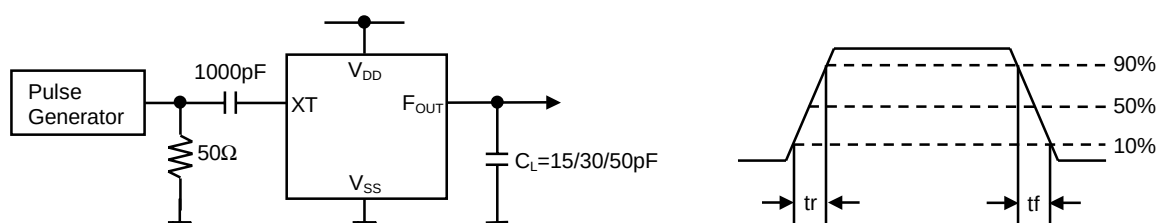

(3) Output Disable/Enable Time

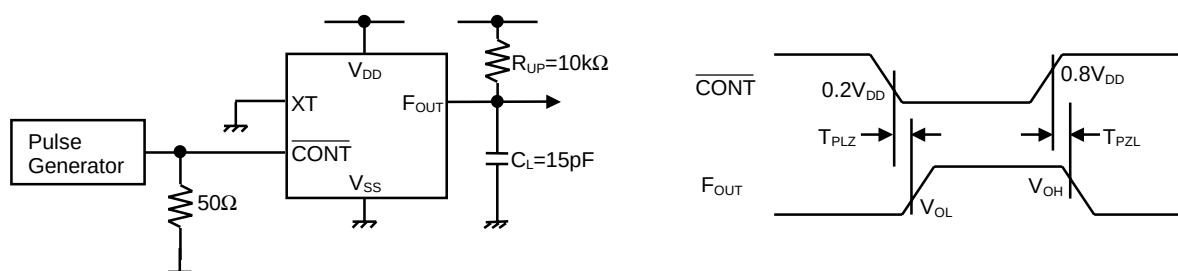

[CAUTION]
The specifications on this data book are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this data book are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.