


ALUMINUM ELECTROLYTIC CAPACITORS



FW Standard, For Audio Equipment
series




• Adapted to the RoHS directive (2002/95/EC).

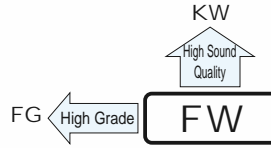

Specifications

Item	Performance Characteristics	
Category Temperature Range	-40 ~ +85°C	
Rated Voltage Range	6.3 ~ 100V	
Rated Capacitance Range	0.1 ~ 33000µF	
Capacitance Tolerance	±20% at 120Hz, 20°C	
Leakage Current	After 1 minute's application of rated voltage, leakage current is not more than 0.03 CV or 4 (µA), whichever is greater. After 2 minutes' application of rated voltage, leakage current is not more than 0.01 CV or 3 (µA), whichever is greater.	
tan δ	Rated voltage (V)	6.3 10 16 25 35 50 63 100
	tan δ (MAX.)	0.28 0.24 0.20 0.16 0.14 0.12 0.10 0.08
		Measurement frequency : 120Hz, Temperature : 20°C
Stability at Low Temperature	Measurement frequency : 120Hz	
	Rated voltage (V)	6.3 10 16 25 35 50 63 100
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C 5 4 3 2 2 2 2 2 Z-40°C / Z+20°C 12 10 8 5 4 3 3 3
Endurance	After 2000 hours' application of voltage at 85°C, capacitors meet the characteristic requirements listed at right.	Capacitance change Within ±20% of initial value tan δ 200% or less of initial specified value Leakage current Initial specified value or less
	Shelf Life	After storing the capacitors under no load at 85°C for 1000 hours, and after performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they will meet the specified value for endurance characteristics listed above.
	Marking	Printed with black color letter on Gold sleeve.


Radial Lead Type

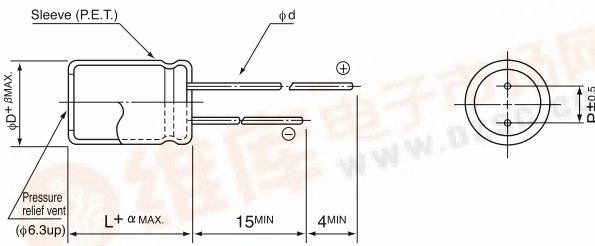

	(mm)										
φD	5	6.3	8	10	12.5	16	18	20	22	25	
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	10	12.5	
φd	0.5	0.5	0.6	0.6	0.6	0.8	0.8	1.0	1.0	1.0	
β	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	1.0	1.0	

α	(φD < 20)	1.5
	(φD ≥ 20)	2.0

Type numbering system (Example : 10V 1000µF)

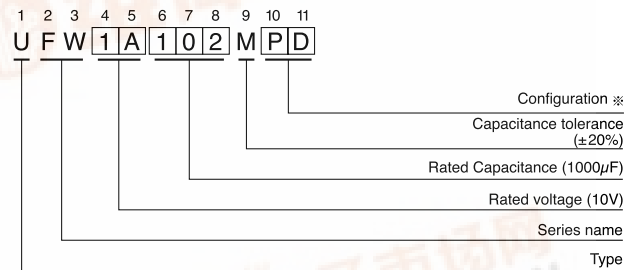

※ Configuration

φD	Pb-free leadwire Pb-free PET sleeve
5	DD
6.3	ED
8-10	PD
12.5~18	HD
20~25	RD

• Please refer to page 21 about the end seal configuration.



ALUMINUM ELECTROLYTIC CAPACITORS



FW series

■ Dimensions

Cap.(μF)	Code	V															
		6.3		10		16		25		35		50		63		100	
		0J		1A		1C		1E		1V		1H		1J		2A	
0.1	0R1											5×11	1.1			5×11	2.1
0.22	R22											5×11	2.4			5×11	4.7
0.33	R33											5×11	3.5			5×11	7.0
0.47	R47											5×11	5.0			5×11	10
1	010											5×11	10			5×11	21
2.2	2R2											5×11	23			5×11	30
3.3	3R3											5×11	35			5×11	40
4.7	4R7											5×11	40			5×11	45
10	100											5×11	65	5×11	70	6.3×11	75
22	220											5×11	95	5×11	100	6.3×11	120
33	330									5×11	105	5×11	120	6.3×11	140	8×11.5	160
47	470							5×11	115	5×11	120	6.3×11	150	6.3×11	165	10×12.5	210
100	101			5×11	145	5×11	155	6.3×11	185	6.3×11	200	8×11.5	250	10×12.5	300	10×20	350
220	221			6.3×11	230	6.3×11	250	8×11.5	320	10×12.5	370	10×12.5	410	10×16	470	12.5×25	600
330	331	6.3×11	265	6.3×11	270	8×11.5	360	10×12.5	420	10×12.5	470	10×16	570	10×20	650	12.5×25	750
470	471	6.3×11	310	6.3×11	330	8×11.5	420	10×12.5	530	10×16	630	12.5×20	760	12.5×20	880	16×25	1000
1000	102	8×11.5	530	10×12.5	630	10×16	770	10×20	950	12.5×20	1100	12.5×25	1300	16×25	1300	18×40	1370
2200	222	10×20	980	10×20	1050	12.5×20	1250	12.5×25	1550	16×25	1800	16×35.5	2090	18×35.5	2200	22×50	2400
3300	332	10×20	1170	12.5×20	1420	12.5×25	1700	16×25	1950	16×35.5	2220	18×35.5	2360	20×40	2700	25×50	2900
4700	472	12.5×20	1350	12.5×25	1800	16×25	2100	16×31.5	2360	18×35.5	2490	20×40	2900	22×50	3400		
6800	682	12.5×25	1600	16×25	2150	16×35.5	2500	18×35.5	2590	20×40	3000	22×50	3500	25×50	3500		
10000	103	16×25	2000	16×35.5	2500	18×35.5	2640	20×40	3000	22×50	3700	25×50	4000				
15000	153	16×35.5	2550	18×35.5	2720	20×40	3400	22×50	3800	25×50	4300						
22000	223	18×40	3200	20×40	3700	22×50	4200	25×50	4500								
33000	333	22×50	3900	22×50	4500	25×50	4800										

Rated Ripple (mA rms) at 85°C 120Hz

● Frequency coefficient of rated ripple current

Cap.(μF)	Frequency	50Hz	120Hz	300Hz	1kHz	10kHz ~
~ 47		0.75	1.00	1.35	1.57	2.00
100 ~ 470		0.80	1.00	1.23	1.34	1.50
1000 ~ 33000		0.85	1.00	1.10	1.13	1.15