



90MHz, 22V/ μ s
16-Bit Accurate
Operational Amplifier
August 1998

FEATURES

- 90MHz Gain Bandwidth, $f = 100\text{kHz}$
- 22V/ μ s Slew Rate
- Settling Time: $< 1\mu\text{s}$ ($A_V = -1$, 150 μ V, 10V Step)
- Maximum Input Offset Voltage: 75 μ V
- Maximum Input Offset Voltage Drift: 2 μ V/ $^{\circ}$ C
- Maximum (-) Input Bias Current: 10nA
- Minimum DC Gain: 1000V/mV
- Minimum Output Swing into 2k: $\pm 12.8\text{V}$
- Unity Gain Stable
- Input Noise Voltage: 5nV/ $\sqrt{\text{Hz}}$
- Input Noise Current: 0.6pA/ $\sqrt{\text{Hz}}$
- Low Distortion, -96dBc for 100kHz, 10V_{P-P}
- Specified at $\pm 5\text{V}$ and $\pm 15\text{V}$

APPLICATIONS

- 16-Bit DAC Current-to-Voltage Converter
- Precision Instrumentation
- ADC Buffer
- Low Distortion Active Filters
- High Accuracy Data Acquisition Systems
- Photodiode Amplifiers

DESCRIPTION

The LT[®]1468 is a precision high speed operational amplifier with 16-bit accuracy and less than 1 μ s settling to 150 μ V for 10V signals. This unique blend of precision and AC performance makes the LT1468 the optimum choice for high accuracy data acquisition applications and current-to-voltage conversion. The initial accuracy and drift characteristics of the input offset voltage and inverting input bias current are tailored for inverting applications.

The 90MHz gain bandwidth ensures high open-loop gain at frequency for reducing distortion. In noninverting applications such as an ADC buffer, the low distortion and DC accuracy allow full 16-bit AC and DC performance.


The 22V/ μ s slew rate of the LT1468 improves large signal performance in applications such as active filters and instrumentation amplifiers compared to other precision op amps.

The LT1468 is manufactured on Linear Technology's complementary bipolar process.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

TYPICAL APPLICATION

16-Bit DAC I-to-V Converter

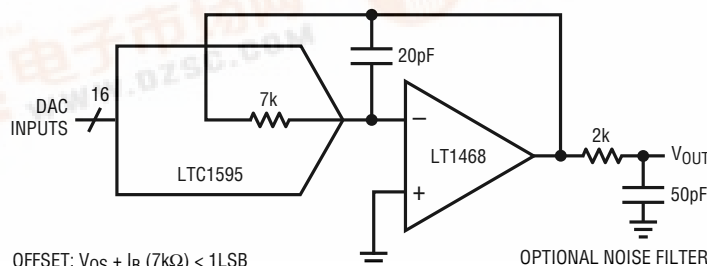

OFFSET: $V_{OS} + I_B (7\text{k}\Omega) < 1\text{LSB}$
 SETTLING TIME TO 150 μ V = 1.8 μ s
 SETTLING LIMITED BY 7k AND 20pF TO COMPENSATE DAC OUTPUT CAPACITANCE

1468 TA01



LT1468

ABSOLUTE MAXIMUM RATINGS

| | |
|-----------------------------------------------|------------------------------------------------|
| Total Supply Voltage (V^+ to V^-) | 36V |
| Maximum Input Current (Note 1) | 10mA |
| Output Short Circuit Duration (Note 2) | Indefinite |
| Operating Temperature Range | -40°C to 85°C |
| Specified Temperature Range (Note 3)... | -40°C to 85°C |
| Junction Temperature | 150°C |
| Storage Temperature Range | -65°C to 150°C |
| Lead Temperature (Soldering, 10 sec.)..... | 300°C |

PACKAGE/ORDER INFORMATION

| | |
|--|-------------------|
| | ORDER PART NUMBER |
| | LT1468CS8 |
| | S8 PART MARKING |
| | 1468 |

Consult factory for Industrial and Military Grade parts.

ELECTRICAL CHARACTERISTICS $T_A = 25^{\circ}\text{C}$, $V_{CM} = 0\text{V}$ unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | V_{SUPPLY} | MIN | TYP | MAX | UNITS | |
|-----------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------|------------------|------------|------|------------------------------|---|
| V_{OS} | Input Offset Voltage | | $\pm 15\text{V}$ | 30 | 75 | | μV | |
| | | | $\pm 5\text{V}$ | 50 | 175 | | μV | |
| I_{OS} | Input Offset Current | | $\pm 5\text{V}$ to $\pm 15\text{V}$ | 15 | 50 | | nA | |
| I_{B-} | Inverting Input Bias Current | | $\pm 5\text{V}$ to $\pm 15\text{V}$ | 3 | 10 | | nA | |
| I_{B+} | Noninverting Input Bias Current | | $\pm 5\text{V}$ to $\pm 15\text{V}$ | 10 | 40 | | nA | |
| e_n | Input Noise Voltage | $f = 10\text{kHz}$ | $\pm 5\text{V}$ to $\pm 15\text{V}$ | 5 | | | $\text{nV}/\sqrt{\text{Hz}}$ | |
| i_n | Input Noise Current | $f = 10\text{kHz}$ | $\pm 5\text{V}$ to $\pm 15\text{V}$ | 0.6 | | | $\text{pA}/\sqrt{\text{Hz}}$ | |
| R_{IN} | Input Resistance | $V_{CM} = \pm 12.5\text{V}$ Differential | $\pm 15\text{V}$ | 100 | 240 | | M Ω | |
| | | | $\pm 5\text{V}$ | 50 | 150 | | k Ω | |
| C_{IN} | Input Capacitance | | $\pm 15\text{V}$ | 4 | | | pF | |
| | | | Positive Input Voltage Range | $\pm 15\text{V}$ | 12.5 | 13.5 | | V |
| | | | $\pm 5\text{V}$ | 2.5 | 3.5 | | V | |
| | Negative Input Voltage Range | | $\pm 15\text{V}$ | -14.5 | -12.5 | | V | |
| | | | $\pm 5\text{V}$ | -4.5 | -2.5 | | V | |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = \pm 12.5\text{V}$ $V_{CM} = \pm 2.5\text{V}$ | $\pm 15\text{V}$ | 96 | 110 | | dB | |
| | | | $\pm 5\text{V}$ | 96 | 112 | | dB | |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 4.5\text{V}$ to $\pm 15\text{V}$ | | 100 | 112 | | dB | |
| A_{VOL} | Large-Signal Voltage Gain | $V_{OUT} = \pm 12.5\text{V}$, $R_L = 10\text{k}$ $V_{OUT} = \pm 12.5\text{V}$, $R_L = 2\text{k}$ $V_{OUT} = \pm 2.5\text{V}$, $R_L = 10\text{k}$ $V_{OUT} = \pm 2.5\text{V}$, $R_L = 2\text{k}$ | $\pm 15\text{V}$ | 1000 | 9000 | | V/mV | |
| | | | $\pm 15\text{V}$ | 500 | 5000 | | V/mV | |
| | | | $\pm 5\text{V}$ | 1000 | 6000 | | V/mV | |
| | | | $\pm 5\text{V}$ | 500 | 3000 | | V/mV | |
| V_{OUT} | Output Swing | $R_L = 10\text{k}$, $V_{IN} = \pm 1\text{mV}$ $R_L = 2\text{k}$, $V_{IN} = \pm 1\text{mV}$ $R_L = 10\text{k}$, $V_{IN} = \pm 1\text{mV}$ $R_L = 2\text{k}$, $V_{IN} = \pm 1\text{mV}$ | $\pm 15\text{V}$ | ± 13.0 | ± 13.6 | | V | |
| | | | $\pm 15\text{V}$ | ± 12.8 | ± 13.5 | | V | |
| | | | $\pm 5\text{V}$ | ± 3.0 | ± 3.6 | | V | |
| | | | $\pm 5\text{V}$ | ± 2.8 | ± 3.5 | | V | |
| I_{OUT} | Output Current | $V_{OUT} = \pm 12.5\text{V}$ $V_{OUT} = \pm 2.5\text{V}$ | $\pm 15\text{V}$ | ± 15 | ± 22 | | mA | |
| | | | $\pm 5\text{V}$ | ± 15 | ± 22 | | mA | |
| I_{SC} | Short-Circuit Current | $V_{OUT} = 0\text{V}$, $V_{IN} = \pm 0.2\text{V}$ | $\pm 15\text{V}$ | ± 25 | ± 40 | | mA | |
| SR | Slew Rate | $A_V = -1$, $R_L = 2\text{k}$ (Note 4) | $\pm 15\text{V}$ | 15 | 22 | | V/ μs | |
| | | | $\pm 5\text{V}$ | 11 | 17 | | V/ μs | |
| | Full-Power Bandwidth | 10V peak, (Note 5) 3V peak, (Note 5) | $\pm 15\text{V}$ | 350 | | | kHz | |
| | | | $\pm 5\text{V}$ | 900 | | | kHz | |

ELECTRICAL CHARACTERISTICS $T_A = 25^\circ\text{C}$, $V_{CM} = 0\text{V}$ unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | V _{SUPPLY} | MIN | TYP | MAX | UNITS |
|---------------|----------------------|-------------------------------------------------------------------------------------------------------|---------------------|-----|------|-----|----------|
| GBW | Gain Bandwidth | $f = 100\text{kHz}$, $R_L = 2\text{k}$ | $\pm 15\text{V}$ | 60 | 90 | | MHz |
| | | | $\pm 5\text{V}$ | 55 | 85 | | MHz |
| t_r , t_f | Rise Time, Fall Time | $A_V = 1$, 10% to 90%, 0.1V | $\pm 15\text{V}$ | | 11 | | ns |
| | | | $\pm 5\text{V}$ | | 12 | | ns |
| | Overshoot | $A_V = 1$, 0.1V | $\pm 15\text{V}$ | | 30 | | % |
| | | | $\pm 5\text{V}$ | | 35 | | % |
| | Propagation Delay | $A_V = 1$, 50% V_{IN} to 50% V_{OUT} , 0.1V | $\pm 15\text{V}$ | | 9 | | ns |
| | | | $\pm 5\text{V}$ | | 10 | | ns |
| t_s | Settling Time | 10V Step, 0.01%, $A_V = -1$ 10V Step, 150 μV , $A_V = -1$ 5V Step, 0.01%, $A_V = -1$ | $\pm 15\text{V}$ | | 760 | | ns |
| | | | $\pm 15\text{V}$ | | 900 | | ns |
| | | | $\pm 5\text{V}$ | | 780 | | ns |
| R_O | Output Resistance | $A_V = 1$, $f = 100\text{kHz}$ | $\pm 15\text{V}$ | | 0.02 | | Ω |
| I_S | Supply Current | | $\pm 15\text{V}$ | | 3.9 | 5.2 | mA |
| | | | $\pm 5\text{V}$ | | 3.6 | 5.0 | mA |

$0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$, $V_{CM} = 0\text{V}$ unless otherwise noted.

| SYMBOL | PARAMETER | CONDITIONS | V _{SUPPLY} | MIN | TYP | MAX | UNITS |
|-----------|---------------------------------|----------------------------------------------------|-------------------------------------|------------|-----|-----|------------------------------|
| V_{OS} | Input Offset Voltage | | $\pm 15\text{V}$ | | | 150 | μV |
| | | | $\pm 5\text{V}$ | | | 250 | μV |
| | Input V_{OS} Drift | (Note 6) | $\pm 5\text{V}$ to $\pm 15\text{V}$ | | 0.7 | 2.0 | $\mu\text{V}/^\circ\text{C}$ |
| I_{OS} | Input Offset Current | | $\pm 5\text{V}$ to $\pm 15\text{V}$ | | | 65 | nA |
| | | | | | | 60 | $\text{pA}/^\circ\text{C}$ |
| I_{B-} | Inverting Input Bias Current | | $\pm 5\text{V}$ to $\pm 15\text{V}$ | | | 15 | nA |
| | | | | | | 40 | $\text{pA}/^\circ\text{C}$ |
| I_{B+} | Noninverting Input Bias Current | | $\pm 5\text{V}$ to $\pm 15\text{V}$ | | | 50 | nA |
| CMRR | Common Mode Rejection Ratio | $V_{CM} = \pm 12.5\text{V}$ | $\pm 15\text{V}$ | 94 | | | dB |
| | | $V_{CM} = \pm 2.5\text{V}$ | $\pm 5\text{V}$ | 94 | | | dB |
| PSRR | Power Supply Rejection Ratio | $V_S = \pm 4.5\text{V}$ to $\pm 15\text{V}$ | | 98 | | | dB |
| A_{VOL} | Large-Signal Voltage Gain | $V_{OUT} = \pm 12.5\text{V}$, $R_L = 10\text{k}$ | $\pm 15\text{V}$ | 500 | | | V/mV |
| | | $V_{OUT} = \pm 12.5\text{V}$, $R_L = 2\text{k}$ | $\pm 15\text{V}$ | 250 | | | V/mV |
| | | $V_{OUT} = \pm 2.5\text{V}$, $R_L = 10\text{k}$ | $\pm 5\text{V}$ | 500 | | | V/mV |
| | | $V_{OUT} = \pm 2.5\text{V}$, $R_L = 2\text{k}$ | $\pm 5\text{V}$ | 250 | | | V/mV |
| V_{OUT} | Output Swing | $R_L = 10\text{k}$, $V_{IN} = \pm 1\text{mV}$ | $\pm 15\text{V}$ | ± 12.9 | | | V |
| | | $R_L = 2\text{k}$, $V_{IN} = \pm 1\text{mV}$ | $\pm 15\text{V}$ | ± 12.7 | | | V |
| | | $R_L = 10\text{k}$, $V_{IN} = \pm 1\text{mV}$ | $\pm 5\text{V}$ | ± 2.9 | | | V |
| | | $R_L = 2\text{k}$, $V_{IN} = \pm 1\text{mV}$ | $\pm 5\text{V}$ | ± 2.7 | | | V |
| I_{OUT} | Output Current | $V_{OUT} = \pm 12.5\text{V}$ | $\pm 15\text{V}$ | ± 12.5 | | | mA |
| | | $V_{OUT} = \pm 2.5\text{V}$ | $\pm 5\text{V}$ | ± 12.5 | | | mA |
| I_{SC} | Short-Circuit Current | $V_{OUT} = 0\text{V}$, $V_{IN} = \pm 0.2\text{V}$ | $\pm 15\text{V}$ | ± 17 | | | mA |
| SR | Slew Rate | $A_V = -1$, $R_L = 2\text{k}$ (Note 4) | $\pm 15\text{V}$ | 13 | | | V/ μs |
| | | | $\pm 5\text{V}$ | 9 | | | V/ μs |
| GBW | Gain Bandwidth | $f = 100\text{kHz}$, $R_L = 2\text{k}$ | $\pm 15\text{V}$ | 55 | | | MHz |
| | | | $\pm 5\text{V}$ | 50 | | | MHz |
| I_S | Supply Current | | $\pm 15\text{V}$ | | | 6.5 | mA |
| | | | $\pm 5\text{V}$ | | | 6.3 | mA |

LT1468

ELECTRICAL CHARACTERISTICS $-40^{\circ}\text{C} \leq T_A \leq 85^{\circ}\text{C}$, $V_{\text{CM}} = 0\text{V}$ unless otherwise noted (Note 3).

| SYMBOL | PARAMETER | CONDITIONS | V _{SUPPLY} | MIN | TYP | MAX | UNITS |
|------------------|---------------------------------|---------------------------------------------------|---------------------|-------|-----|------------|----------|
| V _{OS} | Input Offset Voltage | | ±15V ±5V | | | 230 330 | μV μV |
| | Input V _{OS} Drift | (Note 6) | ±5V to ±15V | | 0.7 | 2.5 | μV/°C |
| I _{OS} | Input Offset Current | | ±5V to ±15V | | | 80 | nA |
| | Input Offset Current Drift | | | | 120 | | pA/°C |
| I _{B-} | Inverting Input Bias Current | | ±5V to ±15V | | | 30 | nA |
| | Negative Input Current Drift | | | | 80 | | pA/°C |
| I _{B+} | Noninverting Input Bias Current | | ±5V to ±15V | | | 60 | nA |
| CMRR | Common Mode Rejection Ratio | V _{CM} = ±12.5V | ±15V | 92 | | | dB |
| | | V _{CM} = ±2.5V | ±5V | 92 | | | dB |
| PSRR | Power Supply Rejection Ratio | V _S = ±4.5V to ±15V | | 96 | | | dB |
| A _{VOL} | Large-Signal Voltage Gain | V _{OUT} = ±12V, R _L = 10k | ±15V | 300 | | | V/mV |
| | | V _{OUT} = ±10V, R _L = 2k | ±15V | 150 | | | V/mV |
| | | V _{OUT} = ±2.5V, R _L = 10k | ±5V | 300 | | | V/mV |
| | | V _{OUT} = ±2.5V, R _L = 2k | ±5V | 150 | | | V/mV |
| V _{OUT} | Output Swing | R _L = 10k, V _{IN} = ±1mV | ±15V | ±12.8 | | | V |
| | | R _L = 2k, V _{IN} = ±1mV | ±15V | ±12.6 | | | V |
| | | R _L = 10k, V _{IN} = ±1mV | ±5V | ±2.8 | | | V |
| | | R _L = 2k, V _{IN} = ±1mV | ±5V | ±2.6 | | | V |
| I _{OUT} | Output Current | V _{OUT} = ±12.5V | ±15V | ±8 | | | mA |
| | | V _{OUT} = ±2.5V | ±5V | ±8 | | | mA |
| I _{SC} | Short-Circuit Current | V _{OUT} = 0V, V _{IN} = ±0.2V | ±15V | ±12 | | | mA |
| SR | Slew Rate | A _V = -1, R _L = 2k (Note 4) | ±15V | 10 | | | V/μs |
| | | | ±5V | 7 | | | V/μs |
| GBW | Gain Bandwidth | f = 100kHz, R _L = 2k | ±15V | 45 | | | MHz |
| | | | ±5V | 40 | | | MHz |
| I _S | Supply Current | | ±15V | | | 7.0 | mA |
| | | | ±5V | | | 6.8 | mA |

Note 1: The inputs are protected by back-to-back diodes and two 100Ω series resistors. If the differential input voltage exceeds 0.7V, the input current should be limited to 10mA. Input voltages outside the supplies will be clamped by ESD protection devices and input currents should also be limited to 10mA.

Note 2: A heat sink may be required to keep the junction temperature below absolute maximum when the output is shorted indefinitely.

Note 3: The LT1468 is designed, characterized and expected to meet these extended temperature limits, but is not tested at -40°C and at 85°C. Consult factory for guaranteed I grade parts.

Note 4: Slew rate is measured between ±8V on the output with ±12V input for ±15V supplies and ±2V on the output with ±3V input for ±5V supplies.

Note 5: Full power bandwidth is calculated from the slew rate measurement: $\text{FPBW} = \text{SR}/2\pi V_P$

Note 6: This parameter is not 100% tested.