



SAW Components

Data Sheet B7777

Data Sheet

EPCOS



SAW Components

B7777

Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet




Features

- Low-loss RF filter for W-CDMA mobile telephone system, transmit path
- High stopband attenuation
- Usable passband 60 MHz
- Unbalanced/unbalanced operation
- Package size: 2 mm x 2.5 mm (4 pin, diagonal pinning)

Terminals

- Ni, gold-plated Data Sheet


Chip sized SAW package

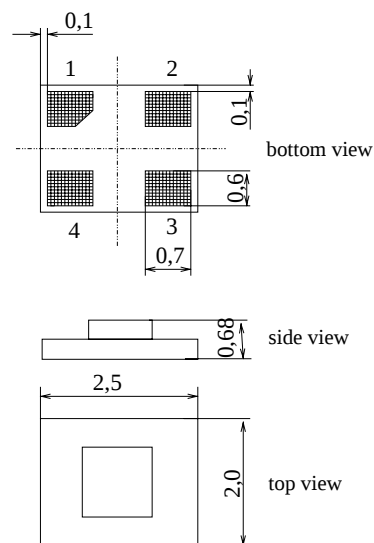

Dimensions in mm, approx weight 0,012g

Pin configuration

- | | |
|-----|--------|
| 1 | Input |
| 3 | Output |
| 2,4 | Ground |



Type	Ordering code	Marking and Package according to	Packing according to
B7777	B39202-B7777-C810	C61157-A7-A118	F61074-V8153-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 20 / + 85	°C	
Storage temperature range	T_{stg}	- 40 / + 85	°C	
DC voltage	V_{DC}	3	V	
Source power	P_s	10	dBm	source impedance 50 Ω



SAW Components

B7777

Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = +25\text{ °C} \pm 2\text{ °C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	1950,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
	1920,0 ... 1980,0 MHz	—	2,2	2,5	dB
Ripple	p-p				
	1920,0 ... 1980,0 MHz	—	1,0	1,2	dB
Input VSWR					
	1920,0 ... 1980,0 MHz	—	1,9	2,1	
Output VSWR					
	1920,0 ... 1980,0 MHz	—	1,9	2,1	
Attenuation	α				
	0,0 ... 1670,0 MHz	26	28	—	dB
	1670,0 ... 1720,0 MHz	29	31	—	dB
	1720,0 ... 1750,0 MHz	30	32	—	dB
	1750,0 ... 1880,0 MHz	31	33	—	dB
	2025,0 ... 2050,0 MHz	35	45	—	dB
	2110,0 ... 2170,0 MHz	34	36	—	dB
	2300,0 ... 2490,0 MHz	34	36	—	dB
	2490,0 ... 2740,0 MHz	35	38	—	dB
	2740,0 ... 3960,0 MHz	30	33	—	dB
	3960,0 ... 6000,0 MHz	15	21	—	dB



SAW Components

B7777

Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet



Characteristics

Operating temperature range: $T = -20$ to $+85\text{ }^{\circ}\text{C}$
Terminating source impedance: $Z_S = 50\ \Omega$
Terminating load impedance: $Z_L = 50\ \Omega$

		min.	typ.	max.	
Center frequency	f_C	—	1950,0	—	MHz
Maximum insertion attenuation	$\alpha_{\max}$				
	1920,0 ... 1980,0 MHz	—	2,4	2,8	dB
Ripple	p-p				
	1920,0 ... 1980,0 MHz	—	1,0	1,6	dB
Input VSWR					
	1920,0 ... 1980,0 MHz	—	2,0	2,2	
Output VSWR					
	1920,0 ... 1980,0 MHz	—	2,0	2,2	
Attenuation	α				
	0,0 ... 1670,0 MHz	26	28	—	dB
	1670,0 ... 1720,0 MHz	29	31	—	dB
	1720,0 ... 1750,0 MHz	30	32	—	dB
	1750,0 ... 1880,0 MHz	31	33	—	dB
	2025,0 ... 2050,0 MHz	35	45	—	dB
	2110,0 ... 2170,0 MHz	34	36	—	dB
	2300,0 ... 2490,0 MHz	34	36	—	dB
	2490,0 ... 2740,0 MHz	35	38	—	dB
	2740,0 ... 3960,0 MHz	30	33	—	dB
	3960,0 ... 6000,0 MHz	15	21	—	dB



SAW Components

B7777



Low-Loss Filter for Mobile Communication

1950,0 MHz

Data Sheet



Transfer function (spec for $25^{\circ}\text{C} \pm 2^{\circ}\text{C}$):

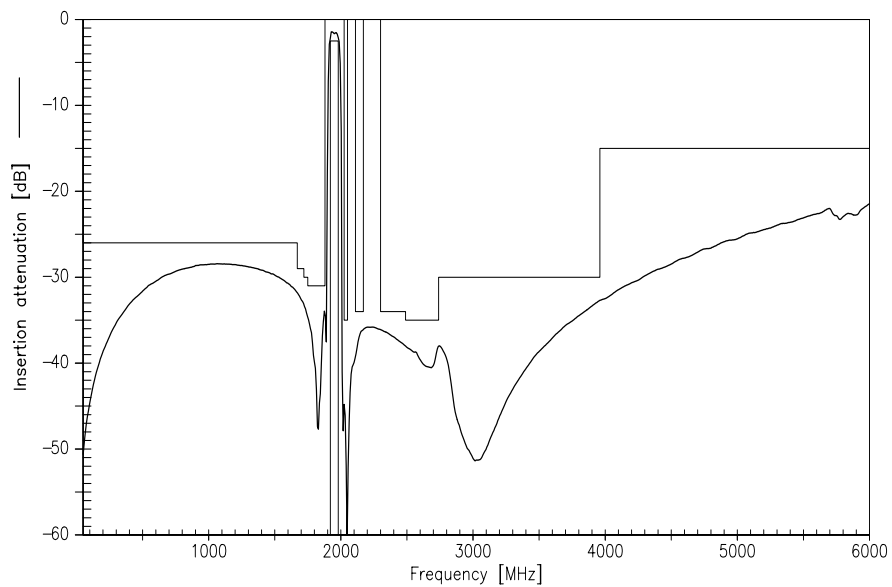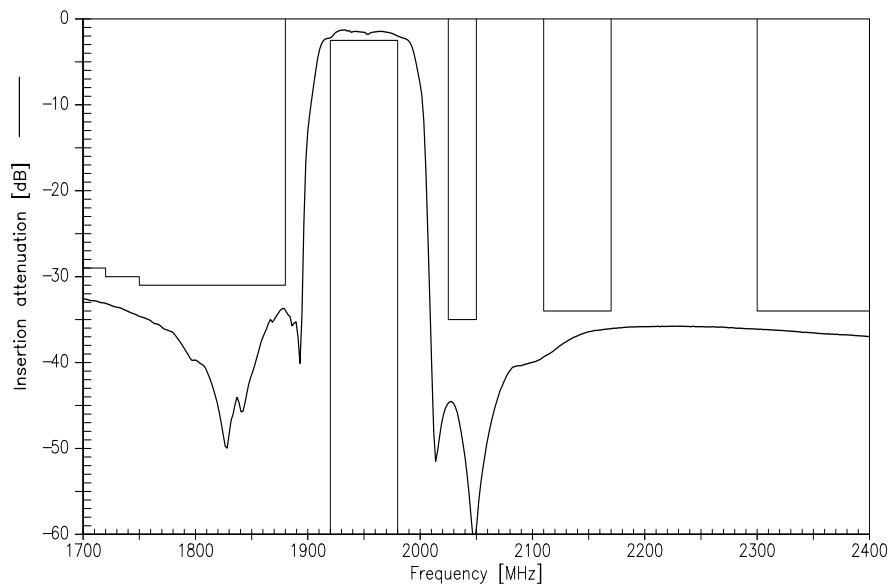



SAW Components		B7777
Low-Loss Filter for Mobile Communication		1950,0 MHz
Data Sheet		

Published by EPCOS AG

Surface Acoustic Wave Components Division, SAW MC WT

P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2004. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.



中发网 WWW.ZFA.CN

全球最大的PDF中文下载站



中发网
www.zfa.cn

PDF 资料下载尽在中发网