


SCES643A-NOVEMBER 2006-REVISED JANUARY 2007


FEATURES

- 1.2 V to 3.6 V on A Port and 1.65 to 5.5 V on B Port (V_{CCA} ≤ V_{CCB})
- V_{CC} Isolation Feature If Either V_{CC} Input Is at GND, All Outputs Are in the High-Impedance State
- OE Input Circuit Referenced to V_{CCA}
- Low Power Consumption, 4-μA Max Icc
- I_{off} Supports Partial-Power-Down Mode Operation
- Latch-Up Performance Exceeds 100 mA Per JESD 78, Class II

GXY OR ZXY PACKAGE (BOTTOM VIEW)



PW PACKAGE (TOP VIEW)




- ESD Protection Exceeds JESD 22
- A Port
 - 2000-V Human-Body Model (A114-B)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)
- B Port
 - ±15-kV Human-Body Model (A114-B)
 - 200-V Machine Model (A115-A)
 - 1000-V Charged-Device Model (C101)

TERMINAL ASSIGNMENTS (20-Ball GXY/ZXY Package)

	1	2	3	4	5
D	V _{CCB}	B2	B4	В6	B8
С	B1	В3	B5	В7	GND
В	A1	А3	A5	A7	OE
Α	V _{CCA}	A2	A4	A6	A8

RGY PACKAGE (TOP VIEW)



DESCRIPTION/ORDERING INFORMATION

This 8-bit noninverting translator uses two separate configurable power-supply rails. The A port is designed to track V_{CCA} . V_{CCA} accepts any supply voltage from 1.2 V to 3.6 V. The B port is designed to track V_{CCB} . V_{CCB} accepts any supply voltage from 1.65 V to 5.5 V. This allows for universal low-voltage bidirectional translation between any of the 1.2-V, 1.5-V, 1.8-V, 2.5-V, 3.3-V, and 5-V voltage nodes. V_{CCA} should not exceed V_{CCB} .

When the output-enable (OE) input is low, all outputs are placed in the high-impedance state.

The TXB0101 is desinged so that the OE input circuit is supplied by V_{CCA}.

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

DESCRIPTION/ORDERING INFORMATION (CONTINUED)

This device is fully specified for partial-power-down applications using I_{off} . The I_{off} circuitry disables the outputs, preventing damaging current backflow through the device when it is powered down.

To ensure the high-impedance state during power up or power down, OE should be tied to GND through a pulldown resistor; the minimum value of the resistor is determined by the current-sourcing capability of the driver.

ORDERING INFORMATION

T _A	PACKAG	E ⁽¹⁾	ORDERABLE PART NUMBER	TOP-SIDE MARKING
	QFN – RGY	Reel of 1000	TXB0108RGYR	YE08
-40°C to 85°C	TSSOP - PW	Reel of 2000	TXB0108PWR	YE08
-40 C to 65 C	VFBGA – GXY	Reel of 2500	TXB0108GXYR	YE08
	VFBGA – ZXY (Pb-free)	Reel of 2500	TXB0108ZXYR	YE08

⁽¹⁾ Package drawings, standard packing quantities, thermal data, symbolization, and PCB design guidelines are available at www.ti.com/sc/package.


PIN DESCRIPTION

NO.	NAME	FUNCTION					
1	A1	Input/output 1. Referenced to V _{CCA} .					
2	V_{CCA}	A-port supply voltage. 1.1 V \leq V _{CCA} \leq 3.6 V, V _{CCA} \leq V _{CCB} .					
3	A2	Input/output 2. Referenced to V _{CCA} .					
4	А3	Input/output 3. Referenced to V _{CCA} .					
5	A4	Input/output 4. Referenced to V _{CCA} .					
6	A5	Input/output 5. Referenced to V _{CCA} .					
7	A6	Input/output 6. Referenced to V _{CCA} .					
8	A7	Input/output 7. Referenced to V _{CCA} .					
9	A8	Input/output 8. Referenced to V _{CCA} .					
10	OE	Output enable. Pull OE low to place all outputs in 3-state mode. Referenced to $V_{\rm CCA}$.					
11	GND	Ground					
12	B8	Input/output 8. Referenced to V _{CCB} .					
13	B7	Input/output 7. Referenced to V _{CCB} .					
14	B6	Input/output 6. Referenced to V _{CCB} .					
15	B5	Input/output 5. Referenced to V _{CCB} .					
16	B4	Input/output 4. Referenced to V _{CCB} .					
17	В3	Input/output 3. Referenced to V _{CCB} .					
18 B2 Input/output 2. Referenced to V _{CCB} .		Input/output 2. Referenced to V _{CCB} .					
19	V _{CCB}	B-port supply voltage. 1.65 V \leq V _{CCB} \leq 5.5 V.					
20	B1	Input/output 1. Referenced to V _{CCB} .					



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

TYPICAL OPERATING CIRCUIT

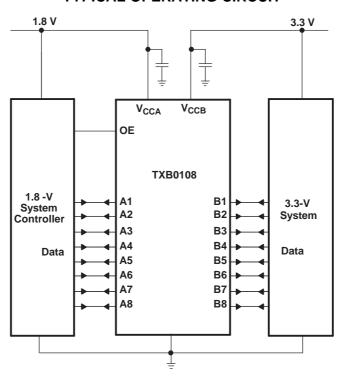

Absolute Maximum Ratings(1)

over operating free-air temperature range (unless otherwise noted)

			MIN	MAX	UNIT
V_{CCA}	Supply voltage range		-0.5	4.6	V
V_{CCB}	Supply voltage range	-0.5	6.5	V	
VI	Input voltage range ⁽²⁾		-0.5	6.5	V
Vo	Voltage range applied to any output in the high-impedance or power	er-off state ⁽²⁾	-0.5	6.5	V
V	Valtana nama annihad ta anni antoni tia tha high an lannatata (2)(3)	A inputs	-0.5	V _{CCA} + 0.5	
Vo	Voltage range applied to any output in the high or low state (2)(3)	B inputs	-0.5	V _{CCB} + 0.5	V
I _{IK}	Input clamp current	V ₁ < 0		-50	mA
I _{OK}	Output clamp current	V _O < 0		-50	mA
Io	Continuous output current			±50	mA
	Continuous current through V _{CCA} , V _{CCB} , or GND			±100	mA
		GXY/ZXY package (4)		78	
θ_{JA}	Package thermal impedance	PW package ⁽⁴⁾		83	°C/W
		RGY package ⁽⁵⁾		37	
T _{stg}	Storage temperature range		-65	150	°C

- (1) Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- (2) The input and output negative-voltage ratings may be exceeded if the input and output current ratings are observed.
- (3) The value of V_{CCA} and V_{CCB} are provided in the recommended operating conditions table.
- (4) The package thermal impedance is calculated in accordance with JESD 51-7.
- (5) The package thermal impedance is calculated in accordance with JESD 51-5.



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

Recommended Operating Conditions(1)(2)

			V _{CCA}	V _{CCB}	MIN	MAX	UNIT
V_{CCA}	Cupply voltage				1.2	3.6	V
V_{CCB}	Supply voltage				1.65	5.5	V
\/	High-level input voltage 1.2 V to 3.6 V 1.65 V to 5.5 V		V _{CCI} x 0.65 ⁽³⁾	V_{CCI}	V		
V _{IH}	nigh-level input voltage	OE	1.2 V 10 3.6 V	1.05 V 10 5.5 V	V _{CCA} x 0.65	5.5	V
V	Low lovel input voltage	Data inputs	1.2 V to 5.5 V	1.65 V to 5.5 V	0	$V_{\rm CCI} \times 0.35^{(3)}$	V
V _{IL}	Low-level input voltage	OE	1.2 V to 3.6 V	1.65 V 10 5.5 V	0	V _{CCA} x 0.35	V
		A-port inputs	1.2 V to 3.6 V	1.65 V to 5.5 V		40	
$\Delta t/\Delta v$	Input transition rise or fall rate	D nort innute	1.2 V to 3.6 V	1.65 V to 3.6 V		40	ns/V
	noo or rail rate	B-port inputs	1.2 V 10 3.6 V	4.5 V to 5.5 V		30	
T _A	Operating free-air temperature				-40	85	°C

- (1) The A and B sides of an unused data I/O pair must be held in the same state, i.e., both at V_{CCI} or both at GND.
 (2) V_{CCA} must be less than or equal to V_{CCB} and must not exceed 3.6 V.
 (3) V_{CCI} is the supply voltage associated with the input port.



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

Electrical Characteristics (1)(2)

over recommended operating free-air temperature range (unless otherwise noted)

		TEST		.,	T,	√ = 25°C	;	-40°C to 8	85°C	LINUT
•	PARAMETER	CONDITIONS	V _{CCA}	V _{CCB}	MIN	TYP	MAX	MIN	MAX	UNIT
V			1.2 V			1.1				V
V_{OHA}		$I_{OH} = -20 \mu A$	1.4 V to 3.6 V					V _{CCA} - 0.4		V
.,		1 20 1	1.2 V			0.9				V
V_{OLA}		$I_{OL} = 20 \mu A$	1.4 V to 3.6 V						0.4	V
V_{OHB}		$I_{OH} = -20 \mu A$		1.65 V to 5.5 V				V _{CCB} - 0.4		V
V_{OLB}		$I_{OL} = 20 \mu A$		1.65 V to 5.5 V					0.4	V
I _I	OE		1.2 V to 3.6 V	1.65 V to 5.5 V			±1		±2	μΑ
	A port		0 V	0 V to 5.5 V			±1		±2	
I _{off}	B port		0 V to 3.6 V	0 V			±1		±2	μΑ
loz	A or B port	OE = GND	1.2 V to 3.6 V	1.65 V to 5.5 V			±1		±2	μΑ
			1.2 V			0.06				
		$V_I = V_{CCI}$ or GND,	1.4 V to 3.6 V	1.65 V to 5.5 V					5	
I _{CCA}		$I_{O} = 0$	3.6 V	0 V					2	μΑ
			0 V	5.5 V					-2	
			1.2 V	4.05.1/4. 5.5.1/		3.4				
		$V_I = V_{CCI}$ or GND,	1.4 V to 3.6 V	1.65 V to 5.5 V					5	
I _{CCB}		$I_{O} = 0$	3.6 V	0 V					-2	μΑ
			0 V	5.5 V					2	
		$V_I = V_{CCI}$ or GND,	1.2 V			3.5				
I _{CCA} +	ICCB	$I_0 = 0$	1.4 V to 3.6 V	1.65 V to 5.5 V					10	μΑ
		$V_I = V_{CCI}$ or GND,	1.2 V			0.05				
I _{CCZA}		I _O = 0, OE = GND	1.4 V to 3.6 V	1.65 V to 5.5 V					5	μΑ
		$V_I = V_{CCI}$ or GND,	1.2 V			3.3				
I _{CCZB}		I _O = 0, OE = GND	1.4 V to 3.6 V	1.65 V to 5.5 V					5	μΑ
Cı	OE		1.2 V to 3.6 V	1.65 V to 5.5 V		5			5.5	pF
_	A port		1.2 V to 3.6 V	1.65 V to 5.5 V		5			6.5	nΕ
C _{io}	B port		1.2 V 10 3.0 V	V 6.6 01 V 60.1		8			10	pF

- (1) V_{CCI} is the supply voltage associated with the input port. (2) V_{CCO} is the supply voltage associated with the output port.

Timing Requirements

 $T_A = 25^{\circ}C, V_{CCA} = 1.2 V$

			V _{CCB} = 1.8 V	V _{CCB} = 2.5 V	V _{CCB} = 3.3 V	V _{CCB} = 5 V	UNIT
			TYP	TYP	TYP	TYP	ONIT
	Data rate		20	20	20	20	Mbps
t _w	Pulse duration	Data inputs	50	50	50	50	ns

Timing Requirements

over recommended operating free-air temperature range, V_{CCA} = 1.5 V \pm 0.1 V (unless otherwise noted)

			V _{CCB} = ± 0.1		V _{CCB} = ± 0.2		V _{CCB} = ± 0.3		V _{CCB} = ± 0.5		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	Data rate			50		50		50		50	Mbps
t _w	Pulse duration	Data inputs	20		20		20		20		ns



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

Timing Requirements

over recommended operating free-air temperature range, V_{CCA} = 1.8 V \pm 0.15 V (unless otherwise noted)

			V _{CCB} = ± 0.1		V _{CCB} = ± 0.2		V _{CCB} = ± 0.3		V _{CCB} = ± 0.5		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	Data rate			52		60		60		60	Mbps
t _w	Pulse duration	Data inputs	19		17		17		17		ns

Timing Requirements

over recommended operating free-air temperature range, V_{CCA} = 2.5 V \pm 0.2 V (unless otherwise noted)

			V_{CCB} = 2.5 V \pm 0.2 V		V _{CCB} = 3.3 V ± 0.3 V		V _{CCB} = 5 V ± 0.5 V		UNIT
			MIN	MAX	MIN	MAX	MIN	MAX	
	Data rate			70		100		100	Mbps
t _w	Pulse duration	Data inputs	14		10		10		ns

Timing Requirements

over recommended operating free-air temperature range, V_{CCA} = 3.3 V \pm 0.3 V (unless otherwise noted)

			V _{CCB} = 3. ± 0.3 \	V _{CCB} = 3.3 V ± 0.3 V		V _{CCB} = 5 V ± 0.5 V	
			MIN	MAX	MIN	MAX	
	Data rate			100		100	Mbps
t _w	Pulse duration	Data inputs	10		10		ns

Switching Characteristics

 $T_A = 25^{\circ}C$, $V_{CCA} = 1.2 \text{ V}$

PARAMETER	FROM	TO	V _{CCB} = 1.8 V	V _{CCB} = 2.5 V	V _{CCB} = 3.3 V	V _{CCB} = 5 V	UNIT
t _{pd}	(INPUT)	(OUTPUT)	TYP	TYP	TYP	TYP	
	Α	В	9.5	7.9	7.6	8.5	
^l pd	В	Α	9.2	8.8	8.4	8	ns
	t _{en} OE	Α	1	1	1	1	
^L en		В	1	1	1	1	μs
	OE	Α	20	17	17	18	
t _{dis}	OE	В	20	16	15	15	ns
t _{rA} , t _{fA}	A-port rise	and fall times	4.1	4.4	4.1	3.9	ns
t _{rB} , t _{fB}	B-port rise and fall times		5	5	5.1	5.1	ns
t _{SK(O)}	Channel-to	-channel skew	2.4	1.7	1.9	7	ns
Max data rate			20	20	20	20	Mbps



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

Switching Characteristics

over recommended operating free-air temperature range, V_{CCA} = 1.5 V \pm 0.1 V (unless otherwise noted)

PARAMETER	FROM	TO (OUTPUT)	V _{CCB} = 1.8 V ± 0.15 V		V _{CCB} = 2.5 V ± 0.2 V		V _{CCB} = 3.3 V ± 0.3 V		V _{CCB} = 5 V ± 0.5 V		UNIT
	(INPUT)	(001701)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
	Α	В	1.4	12.9	1.2	10.1	1.1	10	0.8	9.9	ns
t _{pd}	В	А	0.9	14.2	0.7	12	0.4	11.7	0.3	13.7	
	OE	Α		1		1		1		1	
t _{en}		В		1		1		1		1	μs
	OE	A	6.6	33	6.4	25.3	6.1	23.1	5.9	24.6	ns
t _{dis}		В	6.6	35.6	5.8	25.6	5.5	22.1	5.6	20.6	
t _{rA} , t _{fA}	A-port rise and fall times		0.8	6.5	0.8	6.3	0.8	6.3	0.8	6.3	ns
t _{rB} , t _{fB}	B-port rise and fall times		1	7.3	0.7	4.9	0.7	4.6	0.6	4.6	ns
t _{SK(O)}	Channel-to-channel skew			2.6		1.9		1.6		1.3	ns
Max data rate			50		50		50		50		Mbps

Switching Characteristics

over recommended operating free-air temperature range, V_{CCA} = 1.8 V \pm 0.15 V (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CCB} = 1.8 V ± 0.15 V		V _{CCB} = 2.5 V ± 0.2 V		V _{CCB} = 3.3 V ± 0.3 V		V _{CCB} = 5 V ± 0.5 V		UNIT
	(INFOT)	(001F01)	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
4	Α	В	1.6	11	1.4	7.7	1.3	6.8	1.2	6.5	ns
t _{pd}	В	Α	1.5	12	1.2	8.4	0.8	7.6	0.5	7.1	
	OE	Α		1		1		1		1	
t _{en}		В		1		1		1		1	μs
	OE	Α	5.9	26.7	5.6	21.6	5.4	18.9	4.8	18.7	ns
t _{dis}		В	6.1	33.9	5.2	23.7	5	19.9	5	17.6	
t _{rA} , t _{fA}	A-port rise a	A-port rise and fall times		5.1	0.7	5	1	5	0.7	5	ns
t _{rB} , t _{fB}	B-port rise and fall times		1	7.3	0.7	5	0.7	3.9	0.6	3.8	ns
t _{SK(O)}	Channel-to-channel skew			8.0		0.7		0.6		0.6	ns
Max data rate			52		60		60		60		Mbps



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

Switching Characteristics

over recommended operating free-air temperature range, V_{CCA} = 2.5 V \pm 0.2 V (unless otherwise noted)

PARAMETER	FROM	TO (OUTPUT)	V _{CCB} = 2.5 V ± 0.2 V		V _{CCB} = 3.3 V ± 0.3 V		V _{CCB} = 5 V ± 0.5 V		UNIT
	(INPUT)		MIN	MAX	MIN	MAX	MIN	MAX	
4	A	В	1.1	6.4	1	5.3	0.9	4.7	ns
t _{pd}	В	Α	1	7	0.6	5.6	0.3	4.4	
	OE	Α		1		1		1	μs
t _{en}		В		1		1		1	
	OE	A	5	16.9	4.9	15	4.5	13.8	ns
t _{dis}		В	4.8	21.8	4.5	17.9	4.4	15.2	
t _{rA} , t _{fA}	A-port rise a	A-port rise and fall times		3.6	0.6	3.6	0.5	3.5	ns
t _{rB} , t _{fB}	B-port rise and fall times		0.6	4.9	0.7	3.9	0.6	3.2	ns
t _{SK(O)}	Channel-to-channel skew			0.4		0.3		0.3	ns
Max data rate			70		100		100		Mbps

Switching Characteristics

over recommended operating free-air temperature range, V_{CCA} = 3.3 V \pm 0.3 V (unless otherwise noted)

PARAMETER	FROM (INPUT)	TO (OUTPUT)	V _{CCB} = 3 ± 0. 3		V _{CCB} = 5 V ± 0.5 V		UNIT	
			MIN	MAX	MIN	MAX		
	Α	В	0.9	4.9	0.8	4	20	
t _{pd}	В	A	0.5	5.4	0.2	4	ns	
	OE	A		1		1		
^t en	OE	В		1		1	μs	
	OE	A	4.5	13.9	4.1	12.4		
t _{dis}		В	4.1	17.3	4	14.4	ns	
t _{rA} , t _{fA}	A-port rise a	A-port rise and fall times			0.5	3	ns	
t _{rB} , t _{fB}	B-port rise a	0.7	3.9	0.6	3.2	ns		
t _{SK(O)}	Channel-to-c		0.4		0.3	ns		
Max data rate			100		100		Mbps	



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

Operating Characteristics

T_A = 25°C

				V _{CCA}							
			1.2 V	1.2 V	1.5 V	1.8 V	2.5 V	2.5 V	3.3 V		
						V _{CCB}					
PARAMETER		TEST CONDITIONS	5 V	1.8 V	1.8 V	1.8 V	2.5 V	5 V	3.3 V to 5 V	UNIT	
			TYP	TYP	TYP	TYP	TYP	TYP	TYP		
C	A-port input, B-port output	C = 0 f = 10 MHz	9	8	7	7	7	7	8		
C _{pdA}	B-port input, A-port output	$C_L = 0, f = 10 \text{ MHz}, t_r = t_f = 1 \text{ ns},$	12	11	11	11	11	11	11	pF	
C	A-port input, B-port output	OE = V _{CCA} (outputs enabled)	35	26	27	27	27	27	28	ÞΓ	
C _{pdB}	B-port input, A-port output	(outputs enabled)	26	19	18	18	18	20	21		
C	A-port input, B-port output	C = 0 f = 10 MHz	0.01	0.01	0.01	0.01	0.01	0.01	0.01		
C _{pdA}	B-port input, A-port output	$C_L = 0$, $f = 10$ MHz, $t_r = t_f = 1$ ns, OE = GND (outputs disabled)	0.01	0.01	0.01	0.01	0.01	0.01	0.01	nΕ	
C	A-port input, B-port output		0.01	0.01	0.01	0.01	0.01	0.01	0.03	pF	
C _{pdB}	B-port input, A-port output		0.01	0.01	0.01	0.01	0.01	0.01	0.03		



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

PRINCIPLES OF OPERATION

Applications

The TXB0108 can be used in level-translation applications for interfacing devices or systems operating at different interface voltages with one another.

Architecture

The TXB0108 architecture (see Figure 1) does not require a direction-control signal to control the direction of data flow from A to B or from B to A. In a dc state, the output drivers of the TXB0108 can maintain a high or low, but are designed to be weak, so that they can be overdriven by an external driver when data on the bus starts flowing the opposite direction.

The output one shots detect rising or falling edges on the A or B ports. During a rising edge, the one shot turns on the PMOS transistors (T1, T3) for a short duration, which speeds up the low-to-high transition. Similarly, during a falling edge, the one shot turns on the NMOS transistors (T2, T4) for a short duration, which speeds up the high-to-low transition. The typical output impedance during output transition is 70Ω at $V_{CCO} = 1.2$ V to 1.8 V, 50Ω at $V_{CCO} = 1.8$ V to 3.3 V and 40Ω at $V_{CCO} = 3.3$ V to 5 V.

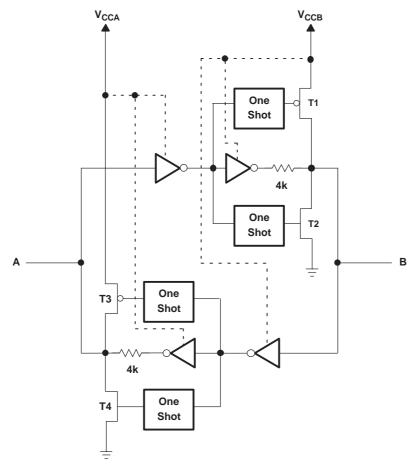



Figure 1. Architecture of TXB0108 I/O Cell

Input Driver Requirements

Typical I_{IN} vs V_{IN} characteristics of the TXB0108 are shown in Figure 2. For proper operation, the device driving the data I/Os of the TXB0108 must have drive strength of at least ± 2 mA.

SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

PRINCIPLES OF OPERATION (continued)

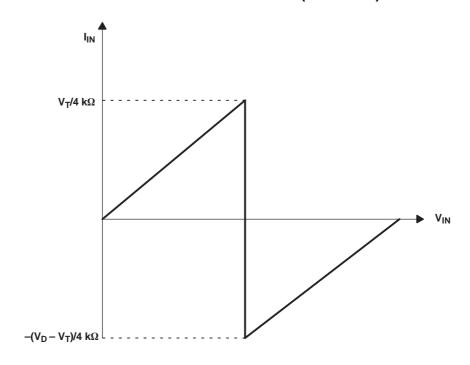

- A. V_T is the input threshold voltage of the TXB0108 (typically V_{CCI}/2).
- B. V_D is the supply voltage of the external driver.

Figure 2. Typical I_{IN} vs V_{IN} Curve

Power Up

During operation, ensure that $V_{CCA} \leq V_{CCB}$ at all times. During power-up sequencing, $V_{CCA} \geq V_{CCB}$ does not damage the device, so any power supply can be ramped up first. The TXB0108 has circuitry that disables all output ports when either V_{CC} is switched off ($V_{CCA/B} = 0 \text{ V}$).

Enable and Disable

The TXB0108 has an OE input that is used to disable the device by setting OE = low, which places all I/Os in the high-impedance (Hi-Z) state. The disable time (t_{dis}) indicates the delay between when OE goes low and when the outputs actually get disabled (Hi-Z). The enable time (t_{en}) indicates the amount of time the user must allow for the one-shot circuitry to become operational after OE is taken high.

Pullup or Pulldown Resistors on I/O Lines


The TXB0108 is designed to drive capacitive loads of up to 70 pF. The output drivers of the TXB0108 have low dc drive strength. If pullup or pulldown resistors are connected externally to the data I/Os, their values must be kept higher than 50 k Ω to ensure that they do not contend with the output drivers of the TXB0108.

For the same reason, the TXB0108 should not be used in applications such as I²C or 1-Wire where an open-drain driver is connected on the bidirectional data I/O. For these applications, use a device from the TI TXS01xx series of level translators.



SCES643A-NOVEMBER 2006-REVISED JANUARY 2007

PARAMETER MEASUREMENT INFORMATION

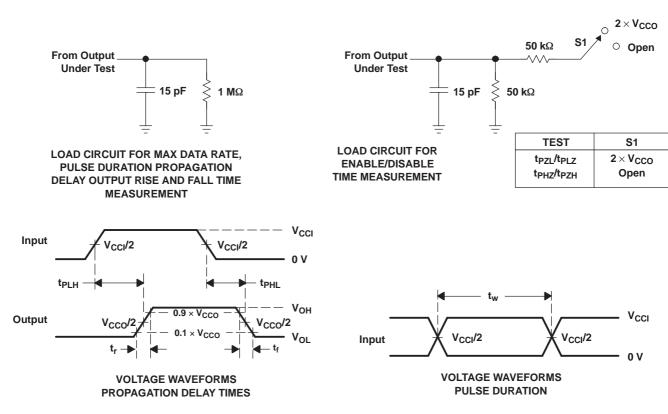

- A. C_L includes probe and jig capacitance.
- B. All input pulses are supplied by generators having the following characteristics: PRR \leq 10 MHz, $Z_0 = 50 \Omega$, $dv/dt \geq$ 1 V/ns.
- C. The outputs are measured one at a time, with one transition per measurement.
- D. t_{PLH} and t_{PHL} are the same as t_{pd} .
- E. V_{CCI} is the V_{CC} associated with the input port.
- F. V_{CCO} is the V_{CC} associated with the output port.
- G. All parameters and waveforms are not applicable to all devices.

Figure 3. Load Circuits and Voltage Waveforms



PACKAGE OPTION ADDENDUM

5-Feb-2007

PACKAGING INFORMATION

Orderable Device	Status ⁽¹⁾	Package Type	Package Drawing	Pins I	Package Qty	e Eco Plan ⁽²⁾	Lead/Ball Finish	MSL Peak Temp ⁽³⁾
TXB0108PWR	ACTIVE	TSSOP	PW	20	2000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-1-260C-UNLIM
TXB0108RGYR	ACTIVE	QFN	RGY	20	1000	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1YEAR

⁽¹⁾ The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check http://www.ti.com/productcontent for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.


Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

MECHANICAL DATA

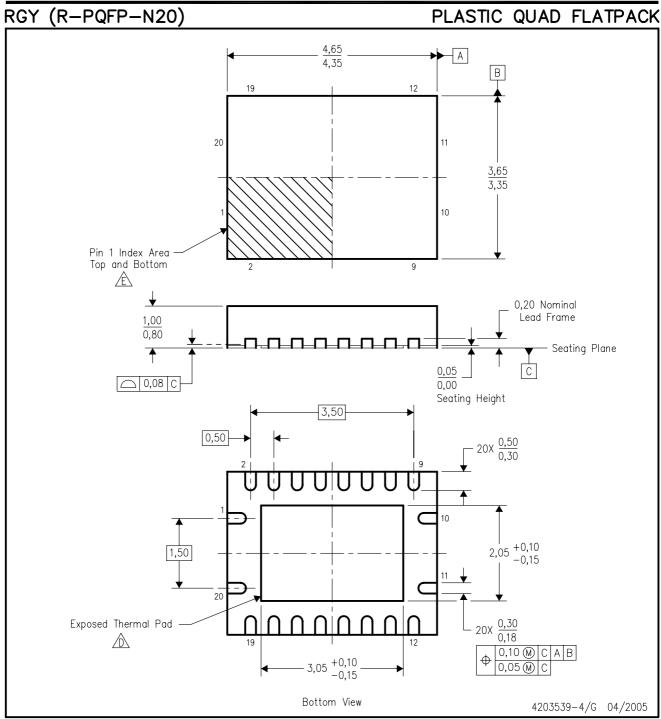

NOTES: A. All linear dimensions are in millimeters. Dimensioning and tolerancing per ASME Y14.5M-1994.

- B. This drawing is subject to change without notice.
- C. QFN (Quad Flatpack No-Lead) package configuration.
- The package thermal pad must be soldered to the board for thermal and mechanical performance.

Pin 1 identifiers are located on both top and bottom of the package and within the zone indicated.

The Pin 1 identifiers are either a molded, marked, or metal feature.


F. Package complies to JEDEC MO-241 variation BC.



PW (R-PDSO-G**)

PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN

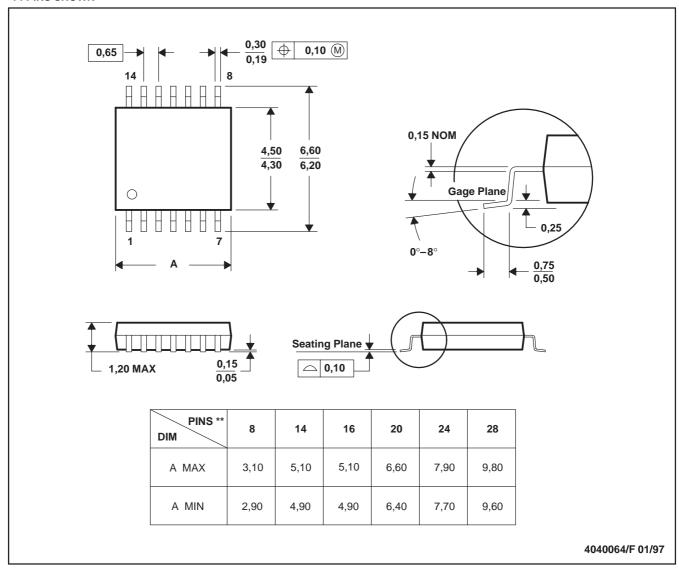

NOTES: A. All linear dimensions are in millimeters.

- B. This drawing is subject to change without notice.
- C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.
- D. Falls within JEDEC MO-153



IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		Applications	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Interface	interface.ti.com	Digital Control	www.ti.com/digitalcontrol
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
Low Power Wireless	www.ti.com/lpw	Telephony	www.ti.com/telephony
		Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments

Post Office Box 655303 Dallas, Texas 75265