

Supertex inc.**TP0104****Low Threshold**

P-Channel Enhancement-Mode Vertical DMOS FETs

Ordering Information

BV_{DSS} / BV_{DGS}	$R_{DS(ON)}$ (max)	$V_{GS(th)}$ (max)	$I_{D(ON)}$ (min)	Order Number / Package		
				TO-92	TO-243AA*	Die†
-40V	4.0Ω	-2.4V	-0.85A	TP0104N3	TP0104N8	TP0104ND

* Same as SOT-89. Product supplied on 2000 piece carrier tape reels.

† MIL visual screening available

Features

- Low threshold — 2.4V max.
- High input impedance
- Low input capacitance
- Fast switching speeds
- Low on resistance
- Free from secondary breakdown
- Low input and output leakage
- Complementary N- and P-channel devices

Applications


- Logic level interfaces – ideal for TTL and CMOS
- Solid state relays
- Battery operated systems
- Photo voltaic drives
- Analog switches
- General purpose line drivers
- Telecom switches

Low Threshold DMOS Technology


These low threshold enhancement-mode (normally-off) transistors utilize a vertical DMOS structure and Supertex's well-proven silicon-gate manufacturing process. This combination produces devices with the power handling capabilities of bipolar transistors and with the high input impedance and positive temperature coefficient inherent in MOS devices. Characteristic of all MOS structures, these devices are free from thermal runaway and thermally-induced secondary breakdown.

Supertex's vertical DMOS FETs are ideally suited to a wide range of switching and amplifying applications where very low threshold voltage, high breakdown voltage, high input impedance, low input capacitance, and fast switching speeds are desired.

Package Options



TO-243AA
(SOT-89)



TO-92

Note: See Package Outline section for dimensions.

* For TO-92 and TO-93, distance of 1.6 mm from case to lead for 10 seconds.

Thermal Characteristics

Package	I_D (continuous)*	I_D (pulsed)	Power Dissipation @ $T_C = 25^\circ\text{C}$	θ_{jc} °C/W	θ_{ja} °C/W	I_{DR}^*	I_{DRM}
TO-92	-0.5A	-2.0A	1.0W	125	170	-0.50A	-2.0A
TO-243AA	-0.26A	-2.0A	1.6W	15	78†	-0.26A	-2.0A

* I_D (continuous) is limited by max rated T_j .

† $T_A = 25^\circ\text{C}$. Mounted on FR5 board, 25mm x 25mm x 1.57mm. Significant P_D increase possible on ceramic substrate.


Electrical Characteristics (@ 25°C unless otherwise specified)

Symbol	Parameter	Min	Typ	Max	Unit	Conditions	
BV_{DSS}	Drain-to-Source Breakdown Voltage	-40			V	$V_{GS} = 0\text{V}$, $I_D = -1.0\text{mA}$	
$V_{GS(\text{th})}$	Gate Threshold Voltage	-1.0		-2.4	V	$V_{GS} = V_{DS}$, $I_D = -1.0\text{mA}$	
$\Delta V_{GS(\text{th})}$	Change in $V_{GS(\text{th})}$ with Temperature		-5.8	-6.5	mV/°C	$V_{GS} = V_{DS}$, $I_D = -1.0\text{mA}$	
I_{GSS}	Gate Body Leakage		-1.0	-100	nA	$V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$	
I_{DSS}	Zero Gate Voltage Drain Current			-10	μA	$V_{GS} = 0\text{V}$, $V_{DS} = \text{Max Rating}$	
				-1	mA	$V_{GS} = 0\text{V}$, $V_{DS} = 0.8$ Max Rating $T_A = 125^\circ\text{C}$	
$I_{D(\text{ON})}$	ON-State Drain Current		-0.08			$V_{GS} = -3\text{V}$, $V_{DS} = -20\text{V}$	
			-0.25	-0.50	A	$V_{GS} = -5\text{V}$, $V_{DS} = -20\text{V}$	
			-0.85	-1.70		$V_{GS} = -10\text{V}$, $V_{DS} = -20\text{V}$	
$R_{DS(\text{ON})}$	Static Drain-to-Source ON-State Resistance		15			$V_{GS} = -3\text{V}$, $I_D = -25\text{mA}$	
			4.7	7.5	Ω	$V_{GS} = -5\text{V}$, $I_D = -0.1\text{A}$	
			2.5	4.0		$V_{GS} = -10\text{V}$, $I_D = -0.5\text{A}$	
$\Delta R_{DS(\text{ON})}$	Change in $R_{DS(\text{ON})}$ with Temperature		0.55	1.0	%/°C	$V_{GS} = -10\text{V}$, $I_D = -0.5\text{A}$	
G_{FS}	Forward Transconductance	225	250		mΩ	$V_{DS} = -20\text{V}$, $I_D = -0.5\text{A}$	
C_{ISS}	Input Capacitance			60		$V_{GS} = 0\text{V}$, $V_{DS} = -20\text{V}$ $f = 1\text{ MHz}$	
C_{OSS}	Common Source Output Capacitance			50	pF		
C_{RSS}	Reverse Transfer Capacitance			25			
$t_{d(\text{ON})}$	Turn-ON Delay Time			4.0	6.0	$V_{DD} = -20\text{V}$, $I_D = -0.85\text{A}$ $R_{\text{GEN}} = 25\Omega$	
t_r	Rise Time			7.0	10		
$t_{d(\text{OFF})}$	Turn-OFF Delay Time			3.0	9.0		
t_f	Fall Time			4.0	13		
V_{SD}	Diode Forward Voltage Drop			-1.2	-2.0	V	$I_{SD} = -0.25\text{A}$, $V_{GS} = 0\text{V}$
t_{rr}	Reverse Recovery Time			300		ns	$I_{SD} = -0.25\text{A}$, $V_{GS} = 0\text{V}$

Notes:


- All D.C. parameters 100% tested at 25°C unless otherwise stated. (Pulse test: 300μs pulse, 2% duty cycle.)
- All A.C. parameters sample tested.

Switching Waveforms and Test Circuit

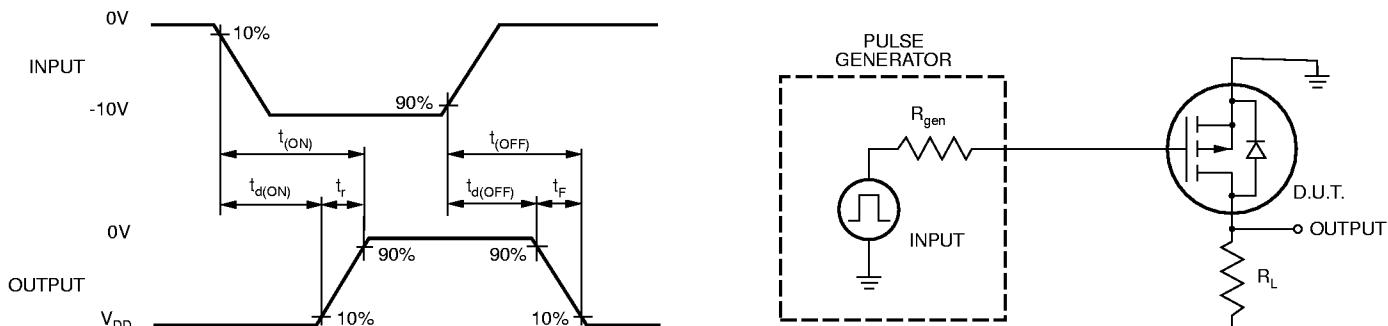


Typical Performance Curves


Output Characteristics

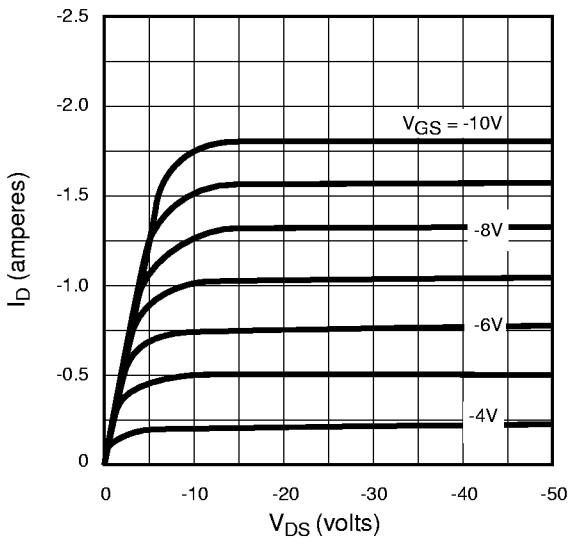


Saturation Characteristics

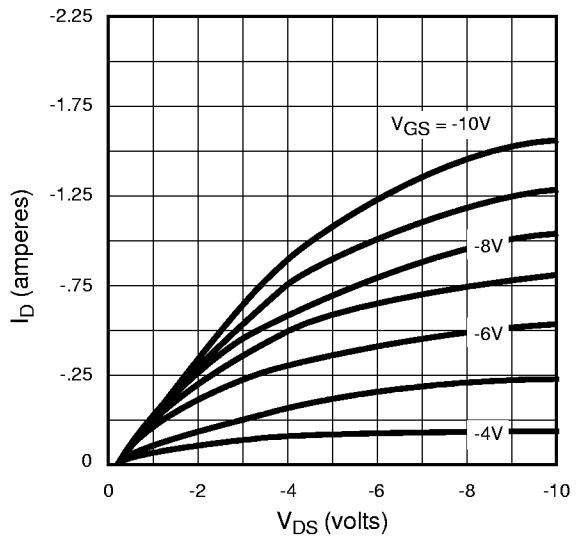


Transconductance vs. Drain Current

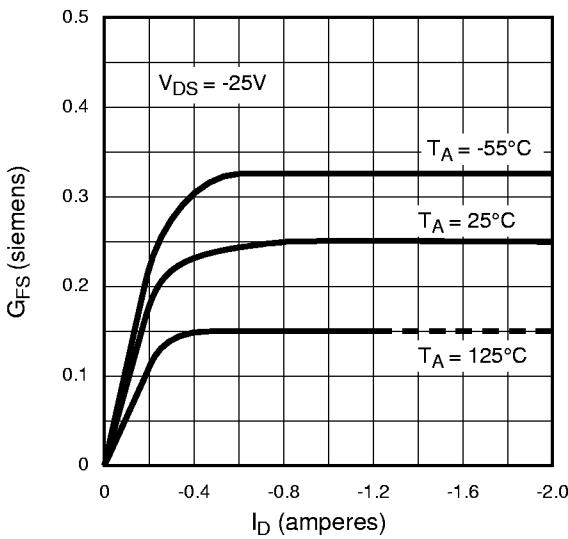


Power Dissipation vs. Case Temperature

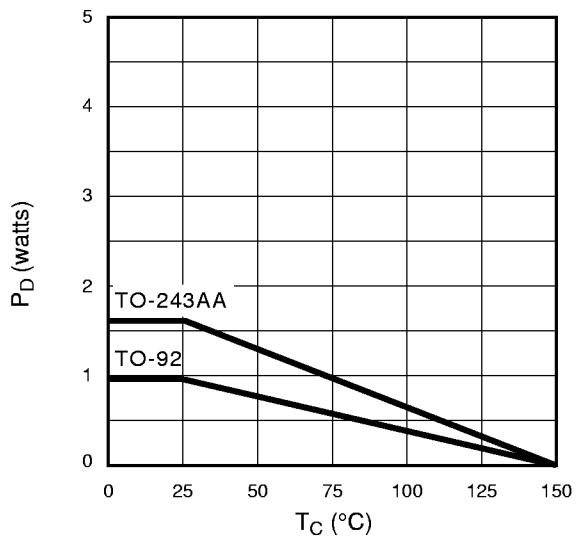

Maximum Rated Safe Operating Area

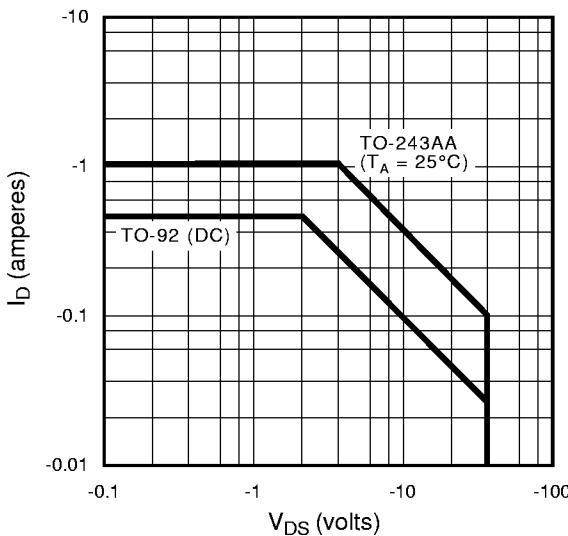

Thermal Response Characteristics

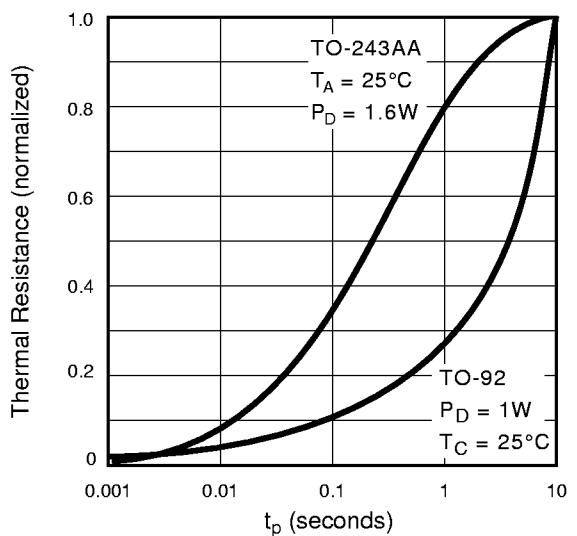

Typical Performance Curves

