专业PCB打样工厂 ,24小时加急出货

LTC1337

5V Low Power RS232 3-Driver/5-Receiver Transceiver

FEATURES

- Low Supply Current: 300µA
- ESD Protection: Over ±10kV
- 1µA Supply Current in Shutdown

查询LTC1327CG供应商

- Operates from a Single 5V Supply
- Uses Small Capacitors: 0.1µF
- Operates to 120k Baud
- Three-State Outputs Are High Impedance When Off
- Output Overvoltage Does Not Force Current Back into Supplies
- RS232 I/O Lines Can Be Forced to ±25V without Damage
- Pin Compatible with LT[®]1137A and LT1237
- Flowthrough Architecture

APPLICATIONS

- **Notebook Computers**
- Palmtop Computers

DESCRIPTION

The LTC[®]1337 is a 3-driver/5-receiver RS232 transceiver with very low supply current. In the no load condition, the supply current is only 300µA. The charge pump only requires four 0.1 µF capacitors and can supply up to 12mA of extra current to power external circuitry.


In Shutdown mode, the supply current is further reduced to 1µA. All RS232 outputs assume a high impedance state in Shutdown and with the power off.


The LTC1337 is fully compliant with all data rate and overvoltage RS232 specifications. The transceiver can operate up to 120k baud with a $1000pF//3k\Omega$ load. Both driver outputs and receiver inputs can be forced to ±25V without damage, and can survive multiple ±10kV ESD strikes.

C, LTC and LT are registered trademarks of Linear Technology Corporation. WWW.DZSC.CO

20

TYPICAL APPLICATION

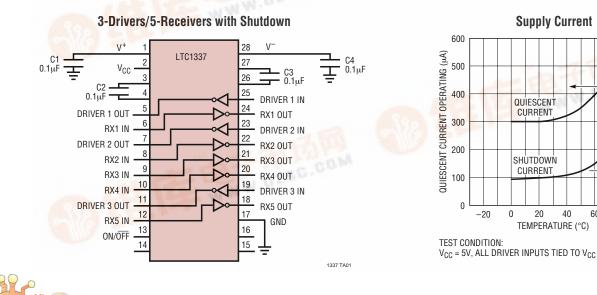



1.2

1.0


0.8 0.6 0.4 (µ.A)

LTC1337

ABSOLUTE MAXIMUM RATINGS

PACKAGE/ORDER INFORMATION

(Note 1)
Supply Voltage (V _{CC}) 6V
Input Voltage
Driver
Receiver 25V to 25V
On/\overline{Off} Pin0.3V to V _{CC} + 0.3V
Output Voltage
Driver 25V to 25V
Receiver $-0.3V$ to V _{CC} + 0.3V
Short Circuit Duration
V ⁺
V ⁻
Driver Output Indefinite
Receiver Output Indefinite
Operating Temperature Range
Commercial (LTC1337C) 0°C to 70°C
Storage Temperature Range –65°C to 150°C
Lead Temperature (Soldering, 10 sec) 300°C

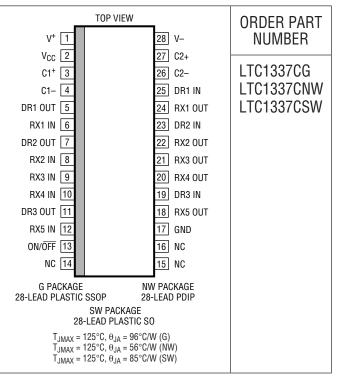

Consult LTC Marketing for parts specified with wider operating temperature ranges.

DC ELECTRICAL CHARACTERISTICS The • denotes specifications which apply over the full operating

temperature range. $V_{CC} = 5V$, $C1 = C2 = C3 = C4 = 0.1 \mu$ F, unless otherwise noted.

PARAMETER	CONDITIONS			MIN	ТҮР	MAX	UNITS
Any Driver							
Output Voltage Swing	$R_L = 3k \text{ to GND}$ $R_I = 3k \text{ to GND}$	Positive Negative	•	5.0 -5.0	7.0 -6.5		V
Logic Input Voltage Level	Input Low Level (V _{OUT} = High) Input High Level (V _{OUT} = Low)	nogativo	•	2.0	1.4 1.4	0.8	V
Logic Input Current	$V_{IN} = 5V$ $V_{IN} = 0$		•			5 -5	μΑ μΑ
Output Short-Circuit Current	V _{OUT} = 0V				±10		mA
Output Leakage Current	Shutdown, V _{OUT} = ±20V (Note 3)				10	500	μA
Any Receiver							
Input Voltage Thresholds	Input Low Threshold Input High Threshold		•	0.8	1.3 1.7	2.4	V V
Hysteresis			•	0.1	0.4	1	V
Input Resistance	$-10V \le V_{\rm IN} \le 10V$			3	5	7	kΩ
Output Voltage	Output Low, $I_{OUT} = -1.6mA (V_{CC} = 5V)$ Output High, $I_{OUT} = 160\mu A (V_{CC} = 5V)$		•	3.5	0.2 4.8	0.4	V V
Output Short-Circuit Current	Sourcing Current, V _{OUT} = 0 Sinking Current, V _{OUT} = V _{CC}			15 -15	20 -40		mA mA
Output Leakage Current	Shutdown, $0 \le V_{OUT} \le V_{CC}$ (Note 3)				1	10	μA

DC ELECTRICAL CHARACTERISTICS

The • denotes specifications which apply over the full operating temperature range. $V_{CC} = 5V$, $C1 = C2 = C3 = C4 = 0.1 \mu$ F, unless otherwise noted.

PARAMETER	CONDITIONS		MIN	ТҮР	MAX	UNITS
Power Supply Generator						
V ⁺ Output Voltage	I _{OUT} = 0mA			8.0		V
	$I_{OUT} = 12mA$			7.5		V
V ⁻ Output Voltage	I _{OUT} = 0mA			-8.0		V
	$I_{OUT} = 12mA$			-6.5		V
Supply Rise Time	Shutdown to Turn-On			0.2		ms
Power Supply	· · ·	·				
V _{CC} Supply Current	No Load (Note 2)	•		0.3	0.5	mA
Supply Leakage Current (V _{CC})	Shutdown (Note 3)	•		1	10	μA
On/Off Threshold Low		•		1.4	0.8	V
On/Off Threshold High		•	2.0	1.4		V

AC CHARACTERISTICS The • denotes specifications which apply over the full operating temperature range. $V_{CC} = 5V$, $C1 = C2 = C3 = C4 = 0.1 \mu F$, unless otherwise noted.


PARAMETER	CONDITIONS		MIN	ТҮР	MAX	UNITS
Slew Rate	R _L = 3k, C _L = 51pF			8	30	V/µs
	$R_{L} = 3k, C_{L} = 2500pF$		2	4		V/µs
Driver Propagation Delay	t _{HLD} (Figure 1)	•		2	3	μS
(TTL to RS232)	t _{LHD} (Figure 1)	•		2	3	μS
Receiver Propagation Delay	t _{HLR} (Figure 2)	•		0.3	0.6	μS
(RS232 to TTL)	t _{LHR} (Figure 2)	•		0.2	0.6	μS


Note 1: Absolute Maximum Ratings are those values beyond which the life of the device may be impaired.

Note 2: Supply current is measured with driver and receiver outputs unloaded and driver inputs tied high.


Note 3: Supply current and leakage measurements in Shutdown are performed with $V_{ON} = 0V$.

TYPICAL PERFORMANCE CHARACTERISTICS






Supply Current vs Data Rate



TYPICAL PERFORMANCE CHARACTERISTICS

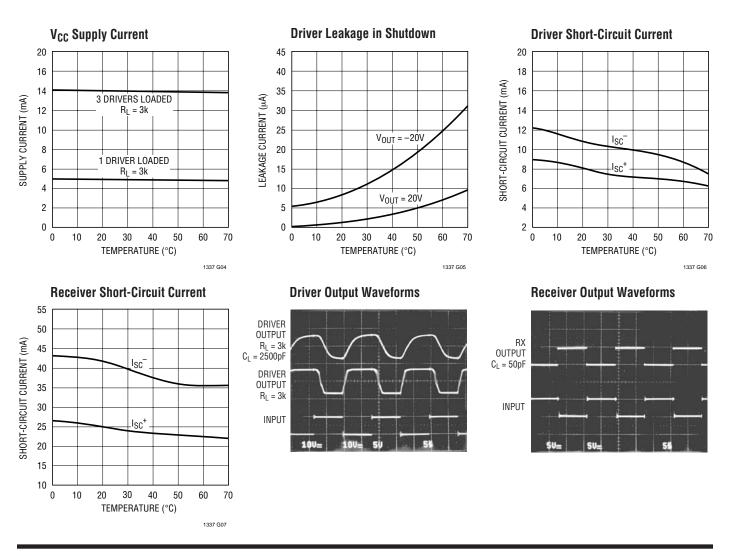

PIN FUNCTIONS

V_{CC}: 5V Input Supply Pin. Supply current less than 1μ A in the Shutdown mode. This pin should be decoupled with a 0.1 μ F ceramic capacitor.

GND: Ground Pin.

ON/OFF: TTL/CMOS Compatible Shutdown Pin. A logic low puts the device in the Shutdown mode which reduces input supply current to less than 1μ A and places all drivers and receivers in high impedance state. This pin cannot float.

V⁺: Positive Supply Output (RS232 Drivers). V⁺ \approx 2V_{CC} – 1V. This pin requires an external capacitor C = 0.1µF for charge storage. The capacitor may be tied to ground or 5V.

With multiple devices, the V⁺ and V⁻ pins may be paralleled into common capacitors. For large numbers of devices, increasing the size of the shared common storage capacitors is recommended to reduce ripple.

V⁻: Negative Supply Output (RS232 Drivers). V⁻ \approx (2V_{CC} –1.5V). This pin requires an external capacitor C = 0.1µF for charge storage.

C1⁺, C1⁻, C2⁺, C2⁻: Commutating Capacitor Inputs. These pins require two external capacitors $C = 0.1 \mu$ F. One from C1⁺ to C1⁻, and another from C2⁺ to C2⁻. To maintain charge pump efficiency, the capacitor's effective series resistance should be less than 50 Ω .

PIN FUNCTIONS

DRIVER IN: RS232 Driver Input Pins. Inputs are TTL/ CMOS compatible. Inputs should not be allowed to float. Tie unused inputs to V_{CC} .

DRIVER OUT: Driver Outputs at RS232 Voltage Levels. Outputs are in a high impedance state when in Shutdown mode or $V_{CC} = 0V$. The driver outputs are protected against ESD to $\pm 10kV$ for human body model discharges. **RX IN:** Receiver Inputs. These pins can be forced to $\pm 25V$ without damage. The receiver inputs are protected against ESD to $\pm 10kV$ for human body model discharges. Each receiver provides 0.4V of hysteresis for noise immunity.

RX OUT: Receiver Outputs with TTL/CMOS Voltage Levels. Outputs are in a high impedance state when in Shutdown mode to allow data line sharing.

SWITCHING TIME WAVEFORMS

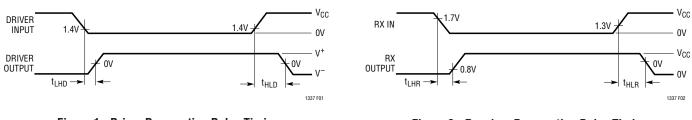


Figure 1. Driver Propagation Delay Timing



TEST CIRCUITS




Figure 3. Driver Timing Test Load






Figure 4. Receiver Timing Test Load

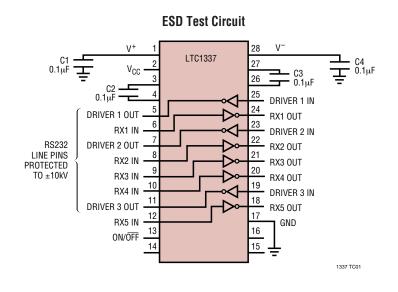


LTC1337

TYPICAL APPLICATIONS

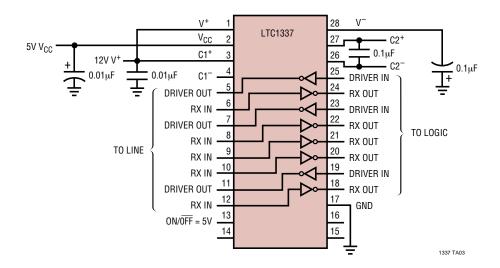


Operation Using 5V and 12V Power Supplies



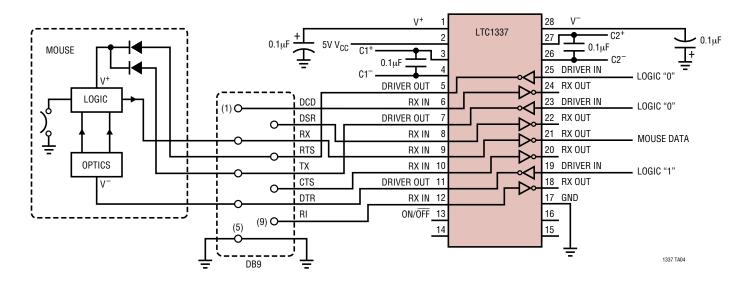


PACKAGE DESCRIPTION

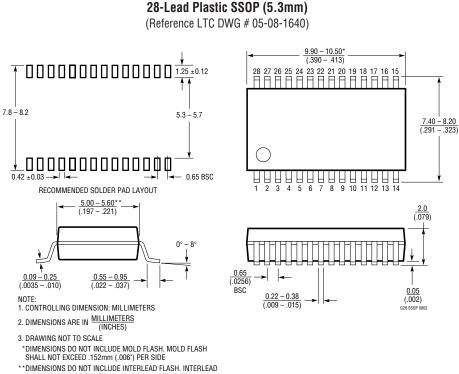

G Package


FLASH SHALL NOT EXCEED .254mm (.010") PER SIDE

NW Package 28-Lead PDIP (Wide .600 Inch) (Reference LTC DWG # 05-08-1520)

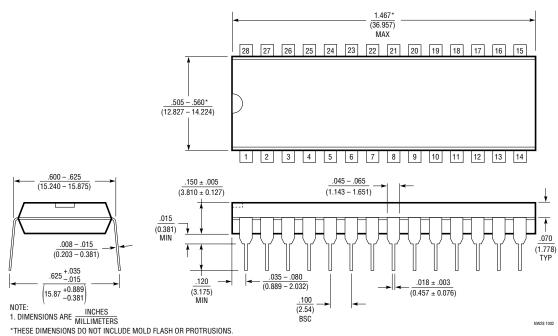

MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED .010 INCH (0.254mm)

PACKAGE DESCRIPTION

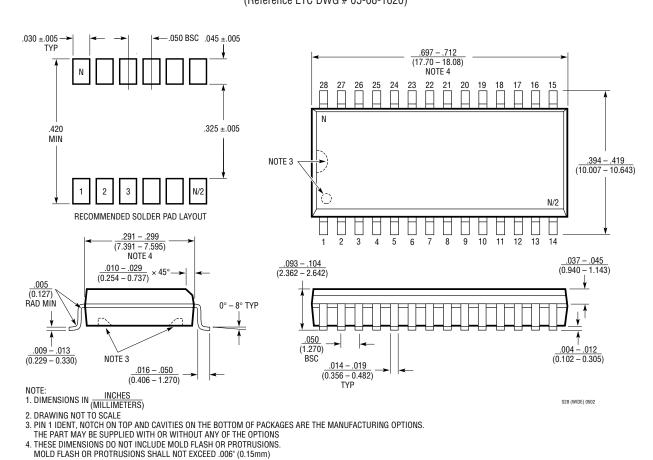

SW Package 28-Lead Plastic Small Outline (Wide .300 Inch) (Reference LTC DWG # 05-08-1620)

RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
LT1137A	5V, 3 Driver, 5 Receiver RS232 Transceiver	±15kV ESD per IEC 1000-4
LTC1327	3.3V, 3 Driver, 5 Receiver RS562 Transceiver	300µA Supply Current, 0.2µA in Shutdown
LTC1348	3.3V to 5V, 3 Driver, 5 Receiver RS232 Transceiver	True RS232 on 3.3V, 5 Receivers Active in Shutdown

1337fa