

System Reset Monolithic IC PST993, 994

Outline

The function of this IC is to accurately reset systems after detecting the supply voltage at the time of switching power on and instantaneous power off in various CPU and other logic systems. Further, this IC can be offered at low cost because it is designed to be simplified allowing for the replacement from reset circuit of discrete configuration.

Features

1. Voltage detect precision
2. Low consumption current
3. Low operating threshold voltage
4. Hysteresis voltage is provided as detect voltage
5. Large output current at the time ON
6. Detect voltage rank

7. Output form

PST993 : Constant current load built-in

PST994 : Open collector

$V_s \pm 5\% \text{ max.}$

$I_{CCH} = 300\mu A \text{ typ. } I_{CCL} = 250\mu A \text{ typ.}$

0.65V typ.

50mV typ.

15mA typ.

PST993	C : 4.5V	H : 3.1V
--------	----------	----------

D : 4.2V	I : 2.9V
----------	----------

E : 3.9V	J : 2.7V
----------	----------

F : 3.6V	K : 2.5V
----------	----------

G : 3.3V	L : 2.3V
----------	----------

(Same ranks for PST994 too)

Packages


TO-92A (PST993□, PST994□)

*□contains detection voltage rank.

Applications

1. Reset circuits for microcomputers, CPU and MPU.
2. Reset circuit for logic circuitry.
3. Level detecting circuit.

Pin Assignment




1	V _{cc}
2	GND
3	V _{OUT}


TO-92A

Equivalent Circuit Diagram

■ PST993

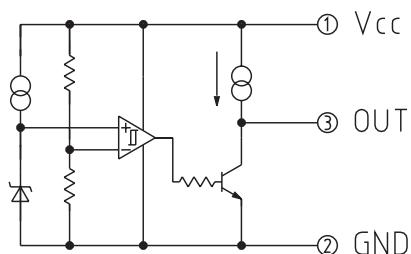

■ PST994

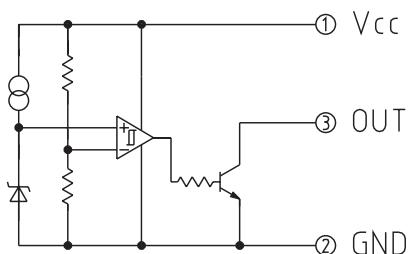

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Ratings	Units
Storage temperature	T _{STG}	-40~+125	°C
Operating temperature	T _{OPR}	-20~+75	°C
Supply voltage	V _{CC}	-0.3~10	V
Allowable loss	P _d	300	mW

Electrical Characteristics (Ta=25°C) (The unit of resistance is Ω unless otherwise indicated.)

Item	Symbol	Measurement Circuit	Measurement conditions	Min.	Typ.	Max.	Units
Detection Voltage	V _s	1	R _L =∞, V _{CC} =H→L	PST993C	4.27	4.5	4.73
				PST993D	4.00	4.2	4.40
				PST993E	3.70	3.9	4.10
				PST993F	3.42	3.6	3.78
				PST993G	3.13	3.3	3.47
				PST993H	2.94	3.1	3.26
				PST993I	2.75	2.9	3.05
				PST993J	2.56	2.7	2.84
				PST993K	2.37	2.5	2.63
				PST993L	2.18	2.3	2.42
Hysteresis Voltage	△V _s	1	R _L =∞, V _{CC} =L→H→L	30	50	100	mV
Detection Voltage Temperature Coefficient	V _s /△T	1	R _L =∞, Ta=-20~+75°C	±0.01			%/°C
Low Level Output Voltage	V _{OL}	1	V _{CC} =V _s min. -0.05V, R _L =1k		0.1	0.4	V
Output Constant Current	I _{OC}	1	V _O =2.5V, V _{CC} =5V, R _L =∞	-40	-25	-17	μA
Circuit Current at ON Time	I _{CCL}	1	V _{CC} =V _s min. -0.05V, R _L =∞		250	400	μA
Circuit Current at OFF Time	I _{CCH}	1	V _{CC} =V _s typ. /0.85V, R _L =∞		300	500	μA
"H" Transmission Delay Time	t _{pLH}	2	C _L =100pF	20 *1			μS
"L" Transmission Delay Time	t _{pHL}	2	C _L =100pF	1			μS
Operating Threshold Voltage	V _{OPL}	1	R _L =4.7k, V _{OL} ≤0.4V		0.65	0.85	V
Output Current at ON Time 1	I _{OL1}	1	R _L =∞, V _O =0.4V V _{CC} =V _s min. -0.05V	6	15		mA
Output Current at ON Time 2	I _{OL2}	1	Ta=-20~+75°C, R _L =∞ V _O =0.4V, V _{CC} =V _s min. -0.05V	4			mA

*Do not apply onto the OUT terminal any voltage higher than that at the V_{CC} terminal.

(*1) The t_{pLH} is a function of the charging time of C_L by output constant current.

The delay time of this IC is about 1 μS.

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Ratings	Units
Storage temperature	T _{STG}	-40~+125	°C
Operating temperature	T _{OPR}	-20~+75	°C
Supply voltage	V _{CC}	-0.3~10	V
Allowable loss	P _d	300	mW

Electrical Characteristics (Ta=25°C) (The unit of resistance is Ω unless otherwise indicated.)


Item	Symbol	Measurement Circuit	Measurement conditions	Min.	Typ.	Max.	Units
Detection Voltage	Vs	1	R _L =1k V _{CC} =H→L	PST994C	4.27	4.5	4.73
				PST994D	4.00	4.2	4.40
				PST994E	3.70	3.9	4.10
				PST994F	3.42	3.6	3.78
				PST994G	3.13	3.3	3.47
				PST994H	2.94	3.1	3.26
				PST994I	2.75	2.9	3.05
				PST994J	2.56	2.7	2.84
				PST994K	2.37	2.5	2.63
				PST994L	2.18	2.3	2.42
Hysteresis Voltage	ΔVs	1	R _L =1k, V _{CC} =L→H→L	30	50	100	mV
Detection Voltage Temperature Coefficient	Vs/ΔT	1	R _L =1k, Ta=-20~+75°C		±0.01		%/°C
Low Level Output Voltage	V _{OL}	1	V _{CC} =Vs min. -0.05V, R _L =1k		0.1	0.4	V
Output Leakage Current	I _{OH}	1	V _{CC} =10V			0.1	μA
Circuit Current at ON Time	I _{CCL}	1	V _{CC} =Vs min. -0.05V, R _L =∞		250	400	μA
Circuit Current at OFF Time	I _{CCH}	1	V _{CC} =Vs typ./0.85V, R _L =∞		300	500	μA
"H" Transmission Delay Time	t _{pLH}	2	C _L =100pF, R _L =4.7k		1		μS
"L" Transmission Delay Time	t _{pHL}	2	C _L =100pF, R _L =4.7k		1		μS
Operating Threshold Voltage	V _{OPL}	1	R _L =4.7k, V _{OL} ≤0.4V		0.65	0.85	V
Output Current at ON Time 1	I _{OL1}	1	V _O =0.4V V _{CC} =Vs min. -0.05V	6	15		mA
Output Current at ON Time 2	I _{OL2}	1	Ta=-20~+75°C V _O =0.4V, V _{CC} =Vs min.-0.05V	4			mA

*Do not apply onto the OUT terminal any voltage higher than that at the V_{CC} terminal.

(*1) The t_{pLH} is a function of the charging time of C_L by output constant current.

The delay time of this IC is about 1 μS.


Equivalent Circuit Diagram

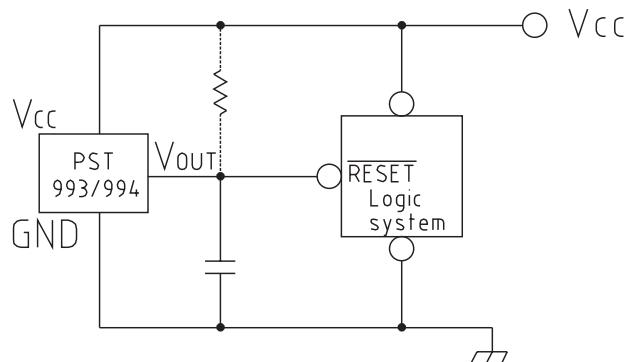


* Since PST993 incorporates a constant current load, the pull-up resistance is not necessary.

Characteristics


■ Vs vs. Ta

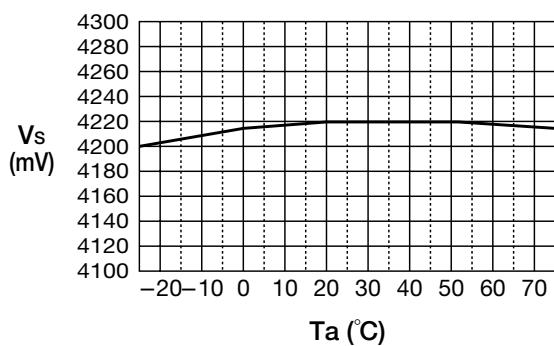


■ VopL vs. Ta

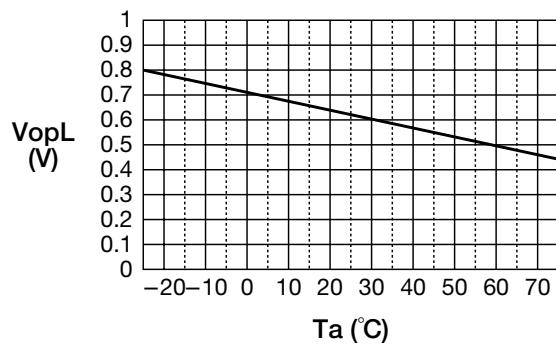


■ ΔVs vs. Ta

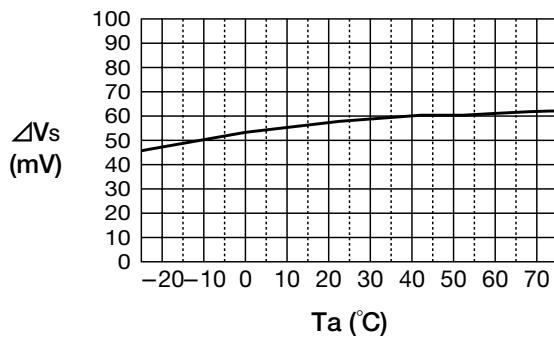

■ VoL vs. Ta

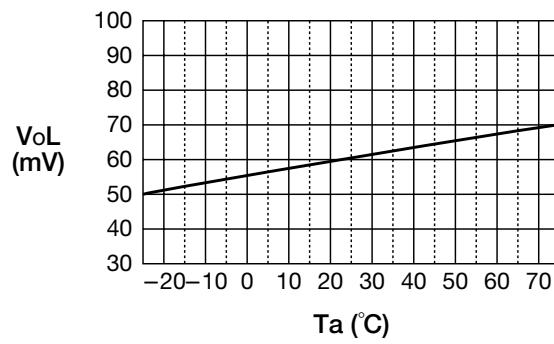

■ IccH vs. Ta

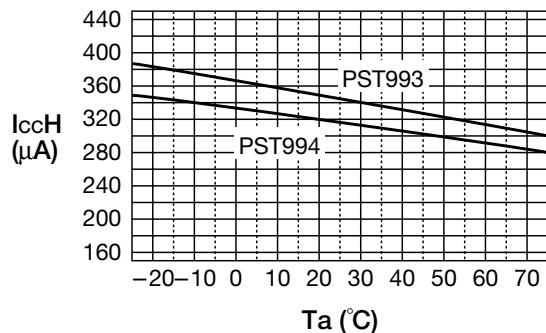

■ IoC vs. Ta (PST993)

