



New Product

SUP/SUB75N06-06


Vishay Siliconix

N-Channel 60-V (D-S), 175°C MOSFET

PRODUCT SUMMARY		
$V_{(BR)DSS}$ (V)	$r_{DS(on)}$ (Ω)	I_D (A)
60	0.0065 @ $V_{GS} = 10$ V	$\pm 75^a$
	0.008 @ $V_{GS} = 4.5$ V	

175°C Rated
Maximum Junction Temperature
TrenchFET®
Power MOSFETs

TO-220AB




Top View
SUP75N06-06

DRAIN connected to TAB

TO-263



Top View
SUB75N06-06

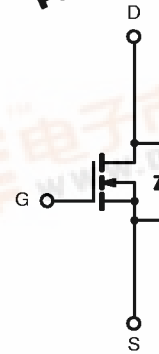

N-Channel MOSFET

ABSOLUTE MAXIMUM RATINGS ($T_C = 25^\circ\text{C}$ UNLESS OTHERWISE NOTED)			
Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	60	V
Gate-Source Voltage	V_{GS}	± 20	
Continuous Drain Current ($T_J = 175^\circ\text{C}$)	I_D	$T_C = 25^\circ\text{C}$	A
		$T_C = 125^\circ\text{C}$	
Pulsed Drain Current	I_{DM}	± 240	A
Avalanche Current	I_{AR}	± 75	
Repetitive Avalanche Energy ^b	E_{AR}	$L = 0.1$ mH	mJ
Maximum Power Dissipation ^b		$T_C = 25^\circ\text{C}$ (TO-220AB and TO-263)	
	$T_A = 25^\circ\text{C}$ (TO-263) ^d	3.7	
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55 to 175	$^\circ\text{C}$

THERMAL RESISTANCE RATINGS			
Parameter	Symbol	Limit	Unit
Junction-to-Ambient	R_{thJA}	PCB Mount (TO-236) ^d	$^\circ\text{C}/\text{W}$
		Free Air (TO-220AB)	
Junction-to-Case	R_{thJC}	0.6	

Notes

- a. Package limited.
- b. Duty cycle $\leq 1\%$.
- c. See SOA curve for voltage derating.
- d. When mounted on 1" square PCB (FR-4 material).



SPECIFICATIONS (T _J = 25°C UNLESS OTHERWISE NOTED)						
Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Static						
Drain-Source Breakdown Voltage	V _{(BR)DSS}	V _{DS} = 0 V, I _D = 250 μA	60			V
Gate-Threshold Voltage	V _{GS(th)}	V _{DS} = V _{GS} , I _D = 250 μA	1		3	
Gate-Body Leakage	I _{GSS}	V _{DS} = 0 V, V _{GS} = ±20 V			±100	nA
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} = 48 V, V _{GS} = 0 V			1	μA
		V _{DS} = 48 V, V _{GS} = 0 V, T _J = 125°C			50	
		V _{DS} = 48 V, V _{GS} = 0 V, T _J = 175°C			250	
On-State Drain Current ^a	I _{D(on)}	V _{DS} ≥ 5 V, V _{GS} = 10 V	120			A
Drain-Source On-State Resistance ^a	r _{DS(on)}	V _{GS} = 10 V, I _D = 30 A			0.0065	Ω
		V _{GS} = 4.5 V, I _D = 20 A			0.008	
		V _{GS} = 10 V, I _D = 30 A, T _J = 125°C			0.011	
		V _{GS} = 10 V, I _D = 30 A, T _J = 175°C			0.014	
Forward Transconductance ^a	g _{fs}	V _{DS} = 15 V, I _D = 30 A	50			S
Dynamic^e						
Input Capacitance	C _{iss}	V _{GS} = 0 V, V _{DS} = 25 V, f = 1 MHz		9400		pF
Output Capacitance	C _{oss}			925		
Reverse Transfer Capacitance	C _{rss}			370		
Total Gate Charge ^c	Q _g	V _{DS} = 30 V, V _{GS} = 10 V, I _D = 75 A		175	250	nC
Gate-Source Charge ^c	Q _{gs}			37		
Gate-Drain Charge ^c	Q _{gd}			33		
Turn-On Delay Time ^c	t _{d(on)}	V _{DD} = 30 V, R _L = 0.4 Ω I _D = 75 A, V _{GEN} = 10 V, R _G = 2.5 Ω		16	25	ns
Rise Time ^c	t _r			9	20	
Turn-Off Delay Time ^c	t _{d(off)}			150	220	
Fall Time ^c	t _f			30	50	
Source-drain diode ratings and characteristics (T_c = 25°C)^b						
Continuous Current	I _S				75	A
Pulsed Current	I _{SM}				240	
Forward Voltage ^a	V _{SD}	I _F = 75 A, V _{GS} = 0 V		1.0	1.3	V
Reverse Recovery Time	t _{rr}	I _F = 75 A, di/dt = 100 A/μs		50	85	ns
Peak Reverse Recovery Current	I _{RM(REC)}			3.4	7	A
Reverse Recovery Charge	Q _{rr}			0.09	0.4	μC


Notes

- a. Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2%.
- b. Guaranteed by design, not subject to production testing.
- c. Independent of operating temperature.




TYPICAL CHARACTERISTICS (25°C UNLESS NOTED)


Output Characteristics

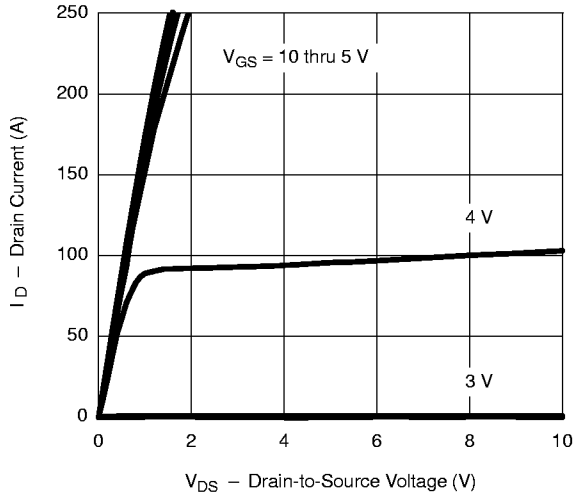


Transfer Characteristics

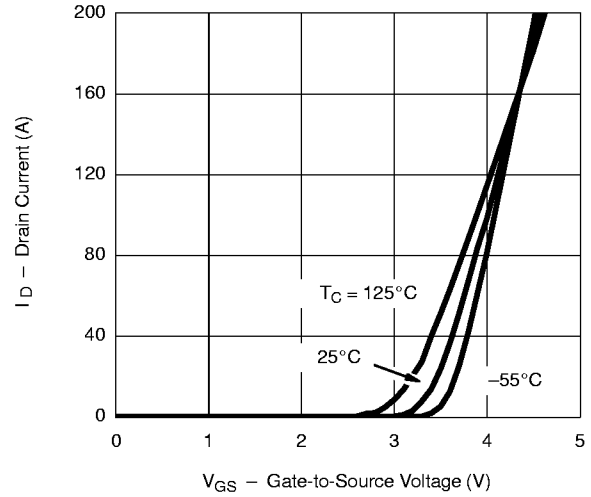


Transconductance

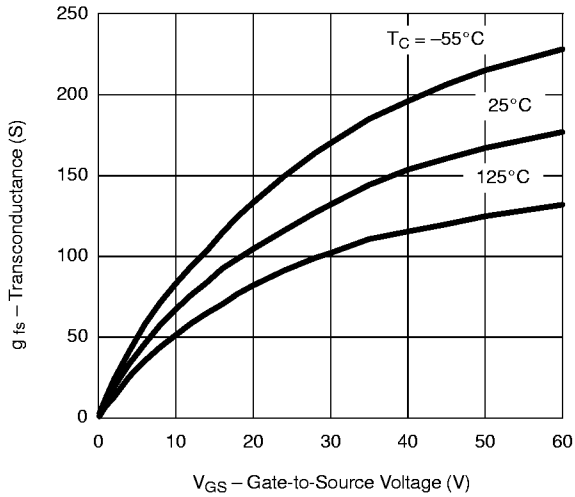


On-Resistance vs. Drain Current

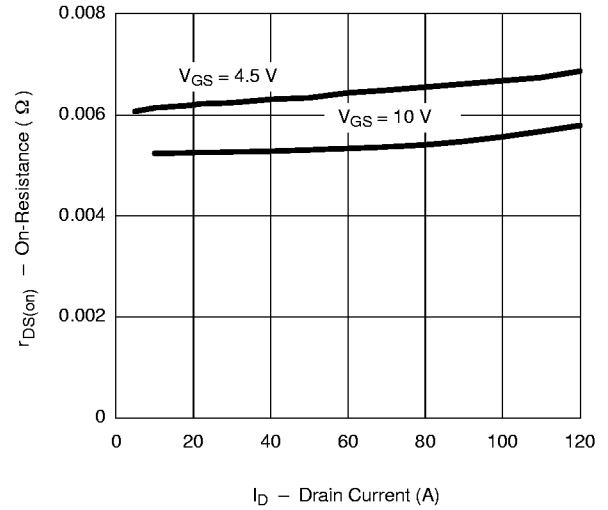





Capacitance

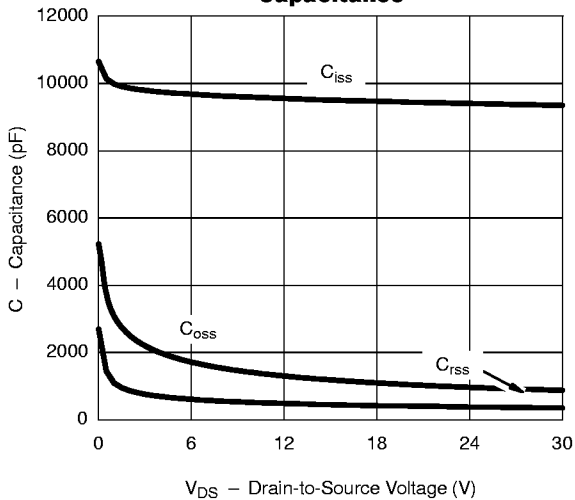

Gate Charge

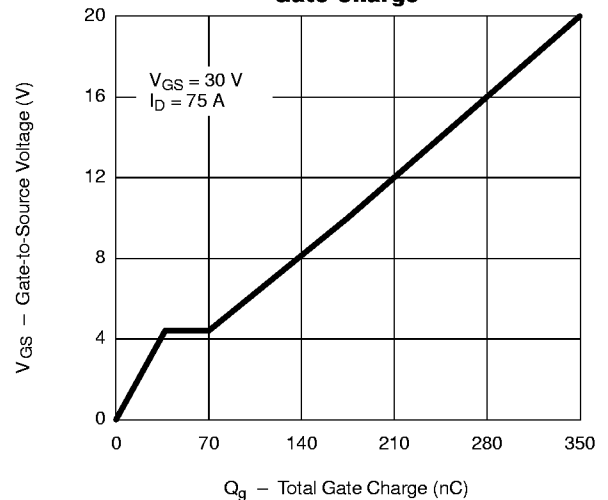


TYPICAL CHARACTERISTICS (25 °C UNLESS NOTED)

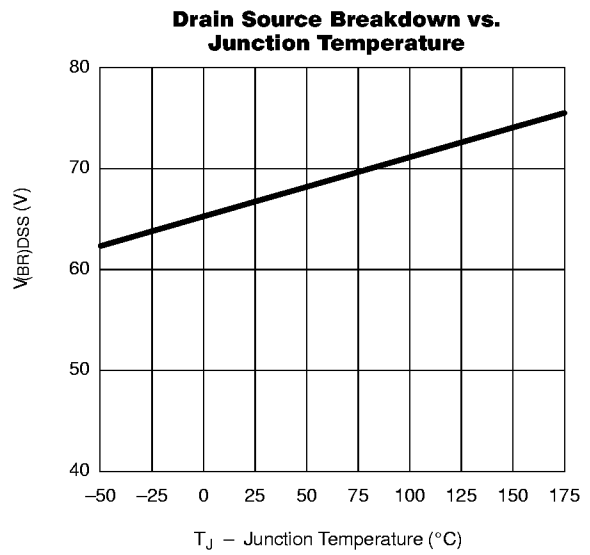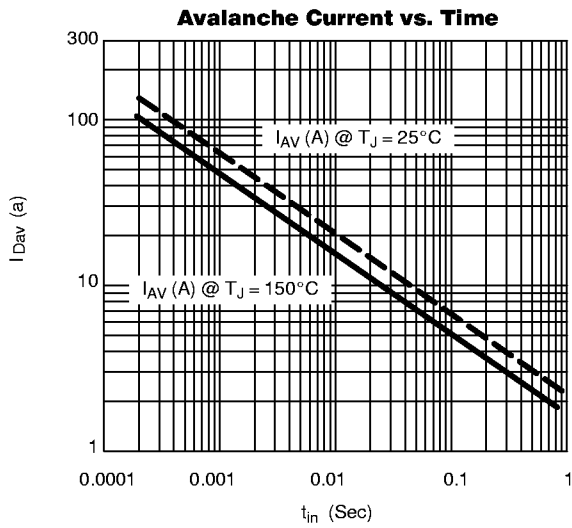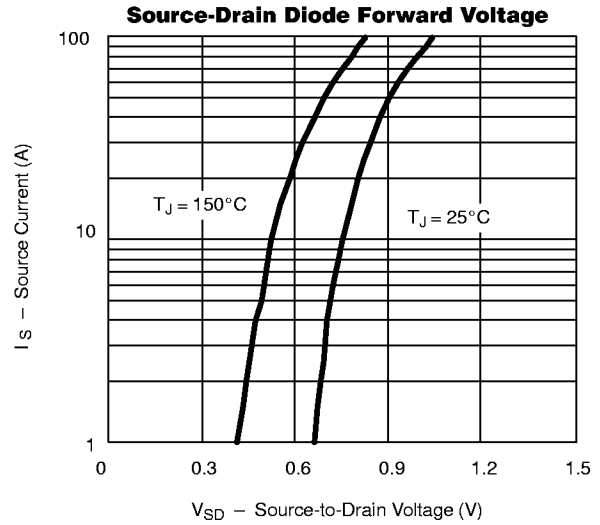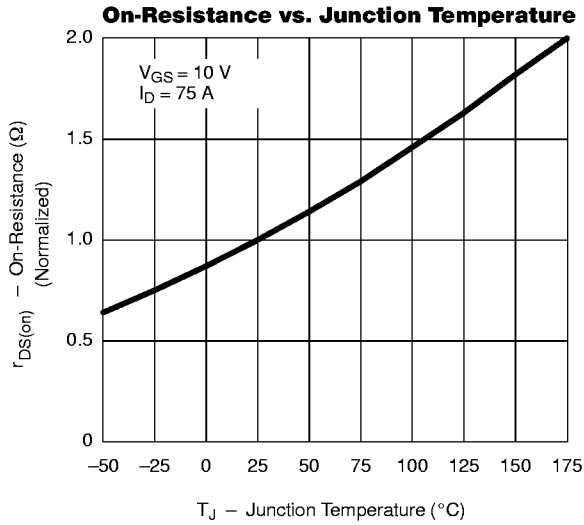




THERMAL RATINGS

Maximum Drain Current vs. Case Temperature

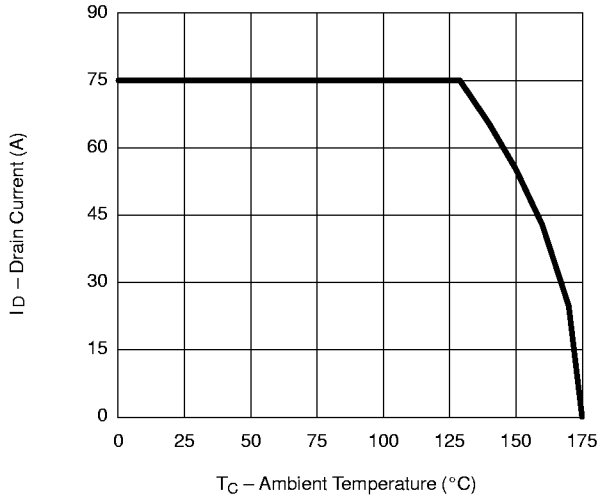

Safe Operating Area

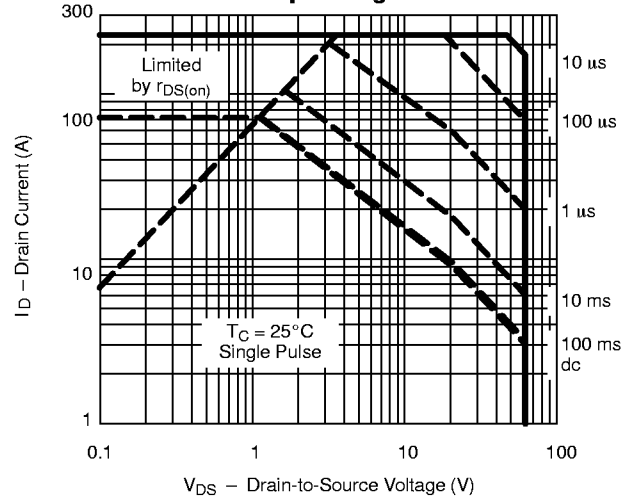

Normalized Thermal Transient Impedance, Junction-to-Case

