



ACD0900S3C

VHF/UHF CATV/TV Tuner Downconverter DATA SHEET - Rev . 0

FEATURES

- Integrated Monolithic Downconverter
- 8 dB Noise Figure
- 10 dB Conversion Gain
- High Linearity
- Small Size
- Low Cost
- High Reliability


DESCRIPTION

The ACD0900 MMIC is a high performance downconverter fabricated entirely in GaAs. It is designed for use as the 2nd conversion stage in double-conversion tuners and cable modems, downconverting 900 -1200 MHz RF inputs to a fixed IF of 35 - 150 MHz (depending on LO frequency).

The IC incorporates a low noise amplifier, high linearity double balanced mixer, phase splitter and oscillator in a SOIC 16 lead surface mount package. The high degree of functionality allows tuner manufactures to reduce size and cost by lowering the component count and decreasing the amount of production alignment steps, while significantly improving performance and reliability.

OPERATING RANGES

PARAMETERS	MIN	TYP	MAX	UNITS
Frequency				
RF	900	-	1200	MHz
LO	935	-	1350	
IF	35	-	150	
VDD	4.75	5.0	5.25	Volts
I _{DD}	-	-	110	MA
Case Temperature	- 55	-	85	°C


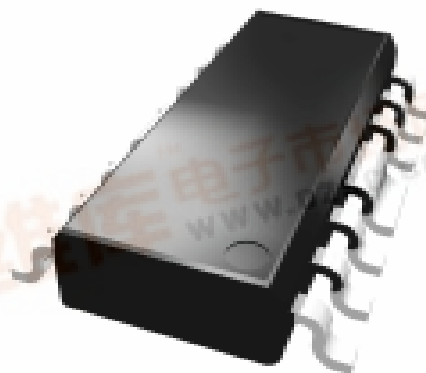


S3C
16 Pin SOIC Package

ABSOLUTE MAXIMUM RATINGS

PARAMETER	MIN.	MAX.	UNITS
VDD/VIF/VOSC/VLO	-	9	Volts
V _{RF} /V _{TCKT} *	-	0	Volts
Storage Temperature	- 55	200	°C
Soldering Temperature	-	260	°C
Soldering Time	-	5	Sec.
RF Input Power	-	+ 10	dBm
LO Input Power	-	+ 17	dBm
Thermal Resistance	-	25	°C/W

*V_{TCKT} : Maximum voltage that may be applied to pin 11 of the device without damaging the IC. DC blocking capacitor (1500pF) between pin11 and the external tuning circuit is mandatory.

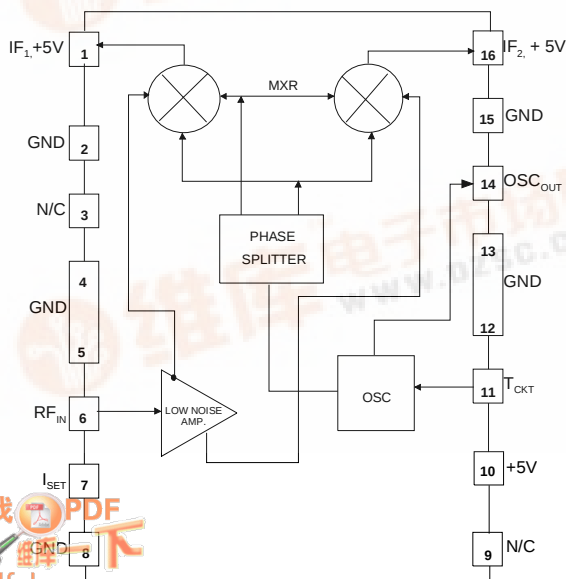

ACD0900S3C


DATA SHEET - Rev. 0

ELECTRICAL SPECIFICATIONS: (Packaged Units, $T_A = +25^\circ\text{C}$, $V_{DD} = +5\text{V}$)

PARAMETER	MIN.	TYP	MAX.	UNITS
Frequencies				
RF	-	1170	-	MHz
LO	-	1245	-	MHz
IF	-	75	-	MHz
Current	-	80	-	mA
Power Consumption @ 5.0V	-	400	-	mW
Phase Noise @ 10 KHz Offset	-	- 89	- 85.5	dBc/Hz
Noise Figure	-	8.0	9.5	dB
Gain (200 Ω Load) ¹	7.8	9.5	-	dB
3rd Order IMD (200 Ω Load) ²		- 59	- 54	dBc
3rd Order Input IP (200 Ω Load) ²	+ 12	-	-	dBm
Cross Modulation @ 15 KHz, ² 99% AM Modulation	-	- 56	-	dBc



1. Combined output ($IF_1 + IF_2$) using a balun. NOTE: Gain at either port (uncombined), with unused port terminated in 50 Ω , is 3 dB lower

2. Two tones @ - 15 dBm per tone

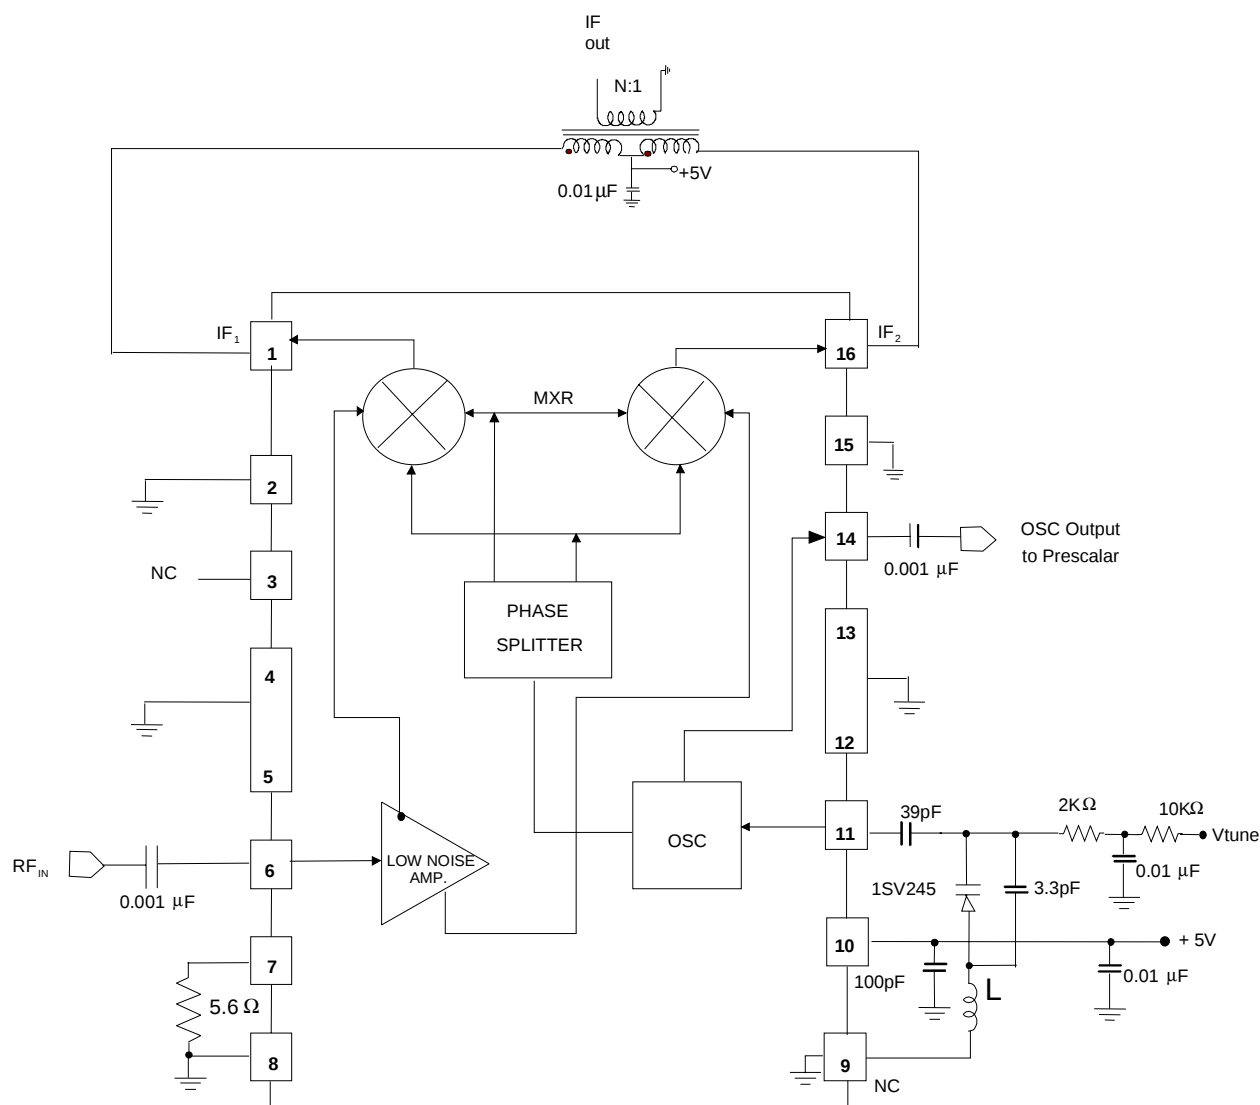


ACD0900S3C
DATA SHEET - Rev. 0

PACKAGE OUTLINE

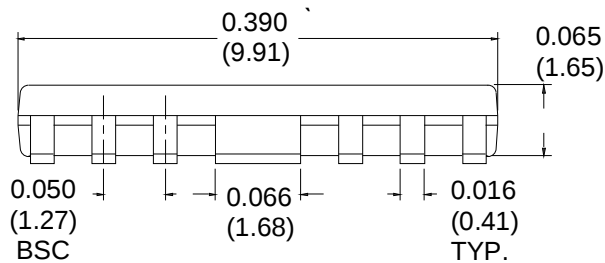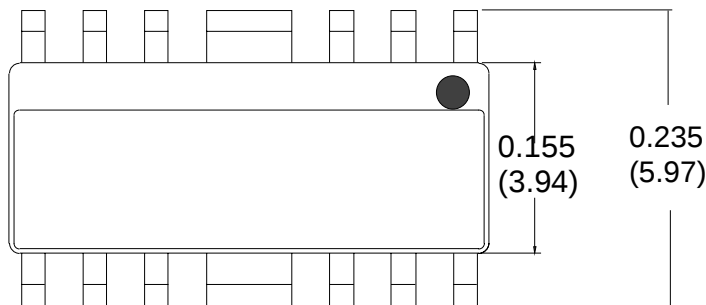


PIN	Function
1	IF ₁ +5V
2	GND
3	NC
4	GND
5	GND
6	RF _{IN}
7	ISET
8	GND
9	NC*
10	+ 5V
11	T _{CKT}
12	GND
13	GND
14	OSC Out
15	GND
16	IF ₂ +5V

* Do not connect pin 9 to GND




RF INPUT IMPEDANCE

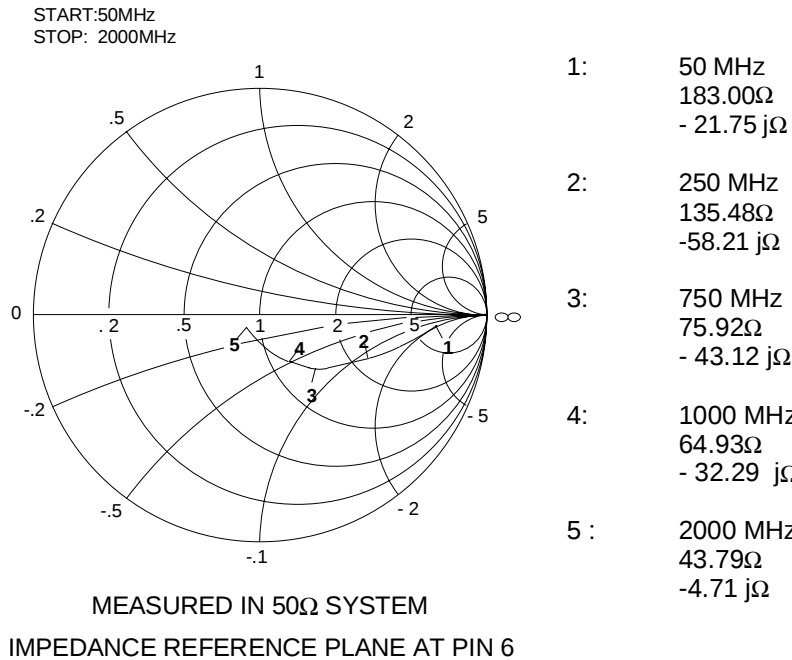

ACD0900S3C DATA SHEET - Rev. 0

IF OUTPUT IMPEDANCE

START: 50 MHz
STOP: 500 MHz

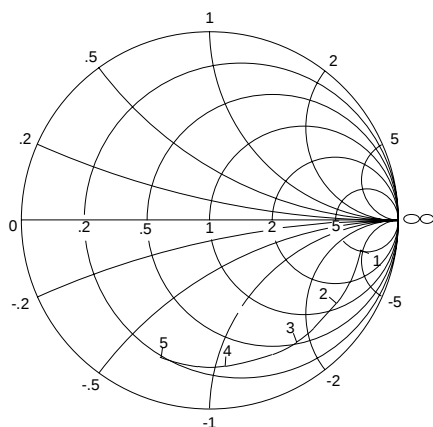


MEASURED IN 50Ω SYSTEM
IMPEDANCE REFERENCE PLANE AT PIN 16

- 1: 50 MHz
251.64Ω
- 222.35 jΩ
- 2: 150 MHz
60.89Ω
-144.22 jΩ
- 3: 250 MHz
26.32Ω
- 89.16 jΩ
- 4: 400 MHz
13.24Ω
- 49.55 jΩ
- 5: 500 MHz
10.08Ω
- 34.10 jΩ

LO IMPEDANCE

START: 50 MHz
STOP: 2000 MHz

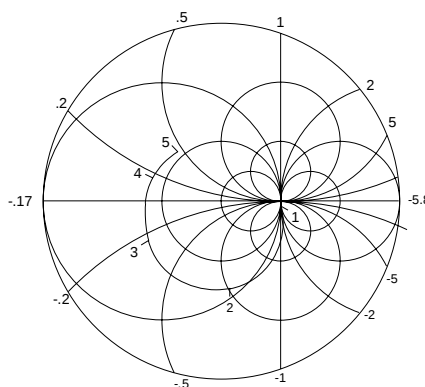

MEASURED IN 50Ω SYSTEM
IMPEDANCE REFERENCE PLANE AT PIN 11

- 1: 50 MHz
259.67Ω
- 1200 jΩ
- 2: 612 MHz
20.97Ω
- 50.63 jΩ
- 3: 1000 MHz
9.28Ω
- 14.88 jΩ
- 4: 1500 MHz
5.36Ω
7.99 jΩ
- 5: 2000 MHz
0.64Ω
27.12 jΩ

ANADIGICS, Inc.
35 Technology Drive
Warren, New Jersey 07059

Tel: (908) 668-5000 / Fax: (908) 668-5132

Email: Mkg@anadigics.com

www.anadigics.com

IMPORTANT NOTICE

ANADIGICS, Inc. reserves the right to make changes to its products or discontinue any product at any time without notice. The Advanced Product data sheets and product specifications contained in this data sheet are subject to change prior to a products formal introduction. The information in this data sheet has been carefully checked and is assumed to be reliable. However, ANADIGICS assumes no responsibility for inaccuracies. ANADIGICS strongly urges customers to verify that the information they are using is current before placing orders.

WARNING

ANADIGICS products are not intended for use in life support appliances, device, or systems. Use of an ANADIGICS product in any such application without written consent is prohibited.