


SUFA 4001 ... SUFA 4007



Surface mount diode

Ultrafast Avalanche Diode

SUFA 4001...SUFA 4007

Forward Current: 1 A

Reverse Voltage: 50 to 1000 V

Features

- Max. solder temperature: 260°C
- Plastic material has UL classification 94V-0

Mechanical Data


- Plastic case: Melf / DO-213AB
- Weight approx.: 0,12 g
- Terminals: plated terminals solderable per MIL-STD-750
- Mounting position: any
- Standard packaging: 5000 pieces per reel

- Max. temperature of the terminals $T_T = 50^\circ\text{C}$
- $I_F = 1\text{ A}$, $T_J = 25^\circ\text{C}$
- $T_A = 25^\circ\text{C}$
- Mounted on P.C. board with 25 mm² copper pads at each terminal

Type	Polarity color band	Repetitive peak reverse voltage V_{RRM} V	Surge peak reverse voltage V_{RSM} V	Maximum forward voltage $T_J = 25^\circ\text{C}$ $I_F = 1\text{ A}$ $V_F^{2)}$ V	Maximum reverse recovery time $I_F = 0,5\text{ A}$ $I_R = 1\text{ A}$ $I_{RR} = 0,25\text{ A}$ t_{rr} ns
SUFA 4001	-	50	50	1	50
SUFA 4002	-	100	100	1	50
SUFA 4003	-	200	200	1	50
SUFA 4004	-	400	400	1,25	50
SUFA 4005	-	600	600	1,7	75
SUFA 4006	-	800	800	1,7	75
SUFA 4007	-	1000	1000	1,7	75

Absolute Maximum Ratings		$T_A = 25^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
I_{FAV}	Max. averaged fwd. current, R-load, $T_T = 50^\circ\text{C}$ ¹⁾	1	A
I_{FRM}	Repetitive peak forward current $f > 15\text{ Hz}$ ¹⁾	10	A
I_{FSM}	Peak fwd. surge current 50 Hz half sinus-wave ³⁾	27	A
I^2t	Rating for fusing, $t < 10\text{ ms}$ ³⁾	3,6	A ² s
R_{thA}	Max. thermal resistance junction to ambient ⁴⁾	45	K/W
R_{thT}	Max. thermal resistance junction to terminals	10	K/W
T_J	Operating junction temperature	- 50 ... + 175	°C
T_s	Storage temperature	- 50 ... + 175	°C

Characteristics		$T_A = 25^\circ\text{C}$, unless otherwise specified	
Symbol	Conditions	Values	Units
I_R	Maximum leakage current, $T_J = 25^\circ\text{C}$; $V_R = V_{RRM}$	<3	μA
	$T_J = 100^\circ\text{C}$; $V_R = V_{RRM}$	<50	μA
C_J	Typical junction capacitance (at MHz and applied reverse voltage of V)	-	pF
Q_{rr}	Reverse recovery charge ($U_R = V$; $I_F = A$; $dI_F/dt = A/ms$)	-	μC
E_{RSM}	Non repetitive peak reverse avalanche energy ($I_R = 1\text{ mA}$; $T_J = 25^\circ\text{C}$; inductive load switched off)	20	mJ

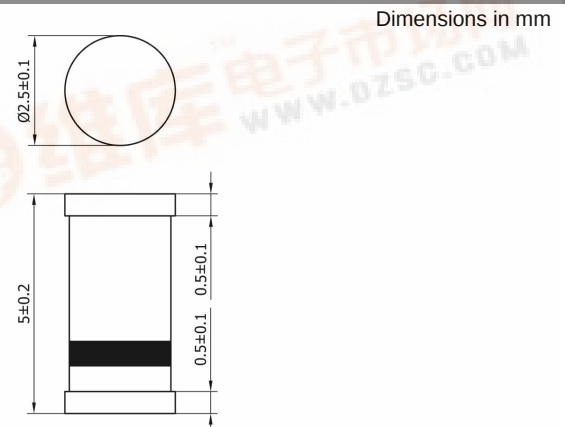

case: Melf / DO-213AB

SUFA 4001 ... SUFA 4007

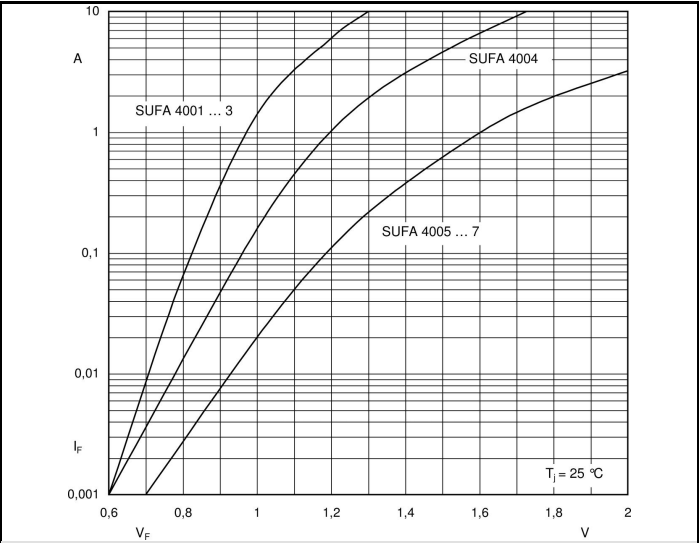


Fig. 1 Forward characteristics (typical values)

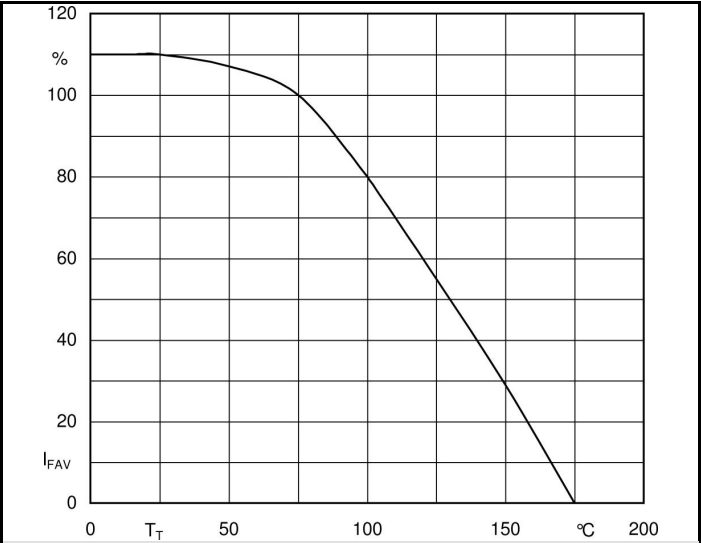


Fig. 2 Rated forward current vs. temp. of the terminals⁴⁾