

# AN8481SB

Spindle motor driver IC for optical disk

## ■ Overview


The AN8481SB is a high performance IC suited for driving a spindle motor of an optical disk such as CD-ROM, PD, DVD, CD-R, CD-RW, etc.

## ■ Features


- Adopting the 3-phase full-wave soft switch system
- With switching regulator control function
- With start and stop pin
- Reverse breaking by EC/ECR voltage
- With Hall bias pin
- Surface-mount small package

## ■ Applications

- High speed CD-ROM drive
- PD, DVD, CD-R, CD-RW drives

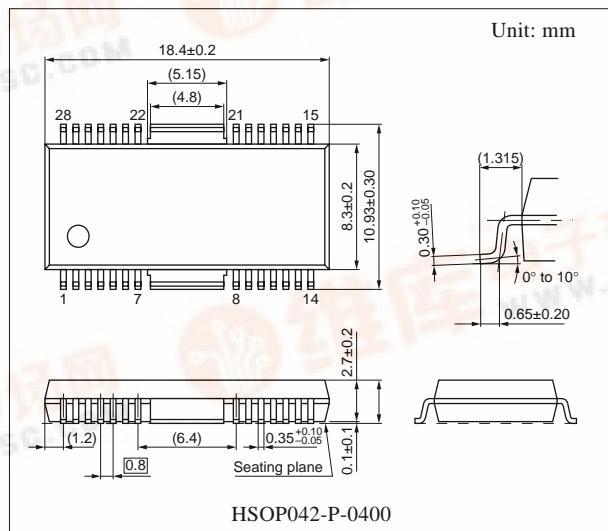

## ■ Block Diagram

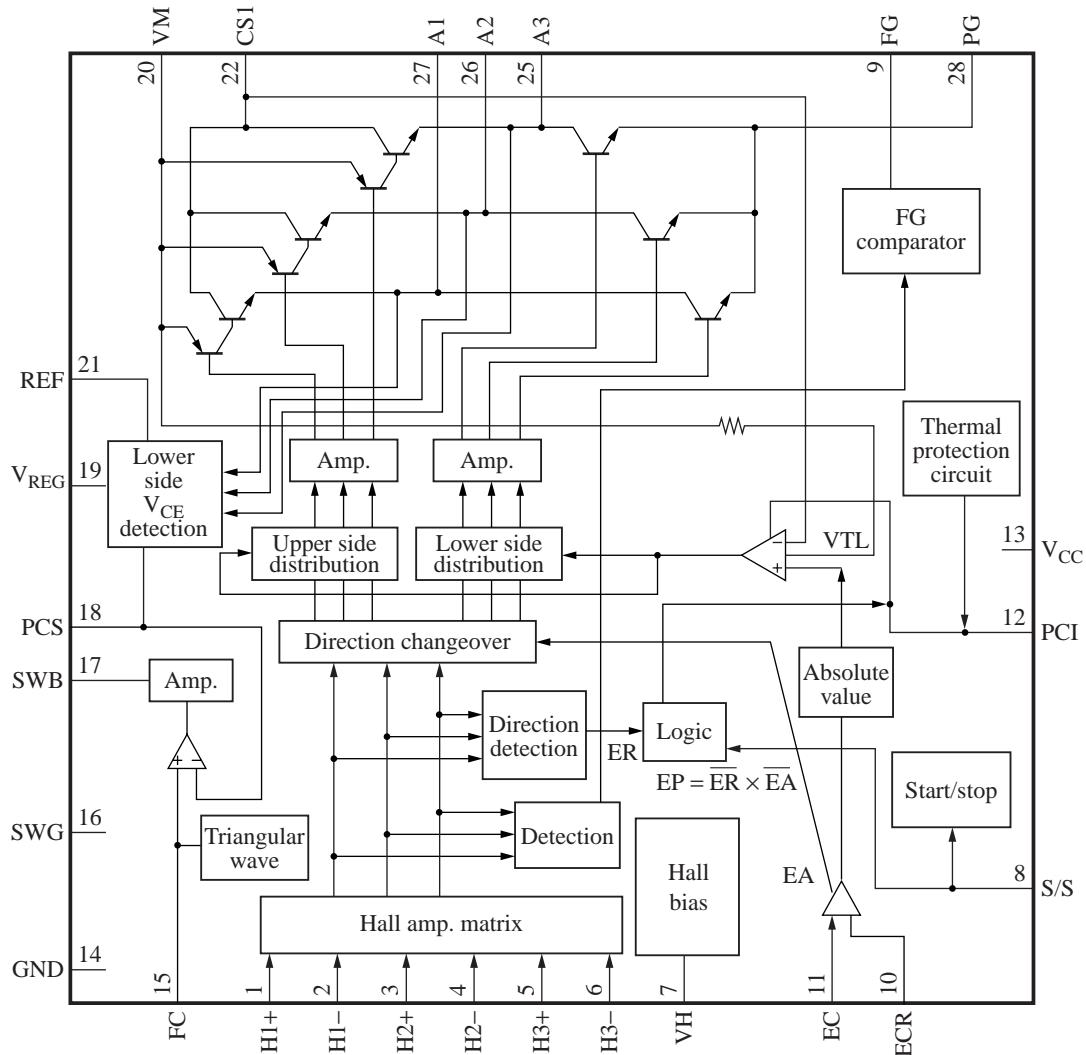

## ■ Pin Descriptions

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	H1+	Hall element-1 positive input pin	11	EC	Torque command input pin
2	H1-	Hall element-1 negative input pin	12	PCI	Current feedback phase compensation pin
3	H2+	Hall element-2 positive input pin	13	V <sub>CC</sub>	Supply voltage pin
4	H2-	Hall element-2 negative input pin	14	SG	Signal GND pin
5	H3+	Hall element-3 positive input pin	15	FC	Triangular wave oscillation pin
6	H3-	Hall element-3 negative input pin	16	SWG	SW-REG system GND pin
7	VH	Hall bias pin	17	SWB	SW-REG driving pin
8	SS	Start/stop changeover pin	18	PCS	SW-REG system phase compensation pin
9	FG	FG signal output pin	19	V <sub>REG</sub>	Fixed power supply pin
10	ECR	Torque command reference input pin	20	VM	Motor supply voltage pin

### ■ Pin Descriptions (continued)

Pin No.	Symbol	Description	Pin No.	Symbol	Description
21	REF	SW-REG reference setting pin	25	A3	Drive output 3
22	CS1	Current det. pin 1	26	A2	Drive output 2
23	N.C.	N.C.	27	A1	Drive output 1
24	N.C.	N.C.	28	PG	Power GND pin

### ■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V <sub>CC</sub>	7.0	V
	V <sub>M</sub>	14.4	
	V <sub>REG</sub>		
Control signal input voltage * <sup>4</sup>	V <sub>(n)</sub>	0 to V <sub>CC</sub>	V
Supply current	I <sub>CC</sub>	30	mA
Output current * <sup>3</sup>	I <sub>O(n)</sub>	±1 200	mA
Hall bias current	I <sub>HB</sub>	50	mA
Power dissipation * <sup>2</sup>	P <sub>D</sub>	667	mW
Operating ambient temperature * <sup>1</sup>	T <sub>opr</sub>	-20 to +70	°C
Storage temperature * <sup>1</sup>	T <sub>stg</sub>	-55 to +150	°C

Note) Do not apply external currents or voltages to any pins not specifically mentioned.

For circuit currents, '+' denotes current flowing into the IC, and '-' denotes current flowing out of the IC.

\*1: Except for the operating ambient temperature and storage temperature, all ratings are for T<sub>a</sub> = 25°C.

\*2: For 70°C and IC alone.

\*3: n = 22, 25, 26, 27, 28

\*4: n = 1, 2, 3, 4, 5, 6, 8, 10, 11

### ■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V <sub>CC</sub>	4.25 to 5.5	V
	V <sub>M</sub>	4.5 to 14	
	V <sub>REG</sub>		

### ■ Electrical Characteristics at T<sub>a</sub> = 25°C

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Overall</b>						
Circuit current 1	I <sub>CC1</sub>	V <sub>CC</sub> = 5 V in power save mode	—	0	0.1	mA
Circuit current 2	I <sub>CC2</sub>	V <sub>CC</sub> = 5 V, I <sub>O</sub> = 0 mA	—	8	16	mA
<b>Start/stop</b>						
Start voltage	V <sub>START</sub>	Voltage with which a circuit operates at V <sub>CC</sub> = 5 V and L → H	3.5	—	—	V
Stop voltage	V <sub>STOP</sub>	Voltage with which a circuit becomes off at V <sub>CC</sub> = 5 V and H → L	—	—	1.0	V

■ Electrical Characteristics at  $T_a = 25^\circ\text{C}$  (continued)

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Hall bias</b>						
Hall bias voltage	$V_{HB}$	$V_{CC} = 5 \text{ V}$ , $I_{HB} = 20 \text{ mA}$	0.7	1.2	1.6	V
<b>Hall amplifier</b>						
Input bias current	$I_{BH}$	$V_{CC} = 5 \text{ V}$	—	1	5	$\mu\text{A}$
In-phase input voltage range	$V_{HBR}$	$V_{CC} = 5 \text{ V}$	1.5	—	4.0	V
Minimum input level	$V_{INH}$	$V_{CC} = 5 \text{ V}$	60	—	—	mV[p-p]
<b>Torque command</b>						
In-phase input voltage range	$EC$	$V_{CC} = 5 \text{ V}$	1	—	3.9	V
Offset voltage	$EC_{OF}$	$V_{CC} = 5 \text{ V}$	-150	0	150	mV
Dead zone	$EC_{DZ}$	$V_{CC} = 5 \text{ V}$	50	100	150	mV
Input current	$EC_{IN}$	$V_{CC} = 5 \text{ V}$ , $EC = ECR = 2.5 \text{ V}$	-5	-1	—	$\mu\text{A}$
Input/output gain	$A_{CS}$	$V_{DD} = 5 \text{ V}$ , $R_{CS} = 0.5 \Omega$	0.31	0.41	0.51	A/V
<b>Output</b>						
High-level output saturation voltage	$V_{OH}$	$V_{CC} = 5 \text{ V}$ , $I_O = -300 \text{ mA}$	—	0.9	1.6	V
Low-level output saturation voltage	$V_{OL}$	$V_{CC} = 5 \text{ V}$ , $I_O = 300 \text{ mA}$	—	0.2	0.6	V
Torque limit current	$I_{TL}$	$V_{CC} = 5 \text{ V}$ , $R_{CS} = 0.5 \Omega$	390	530	670	mA
<b>FG</b>						
FG output high-level	$FG_H$	$V_{CC} = 5 \text{ V}$ , $I_{FG} = -0.01 \text{ mA}$	3.0	—	$V_{CC}$	V
FG output low-level	$FG_L$	$V_{CC} = 5 \text{ V}$ , $I_{FG} = 0.01 \text{ mA}$	—	—	0.5	V
In-phase input voltage range	$V_{FGR}$	$V_{CC} = 5 \text{ V}$ , Input D-range at H2+, H2-	1.5	—	3.0	V
FG hysteresis width	$H_{FG}$	$V_{CC} = 5 \text{ V}$	1	10	20	mV
<b>Triangular wave oscillation circuit</b>						
Charging current	$I_{CH}$	$V_{CC} = 5 \text{ V}$ , $FC = 0.5 \text{ V}$	-100	-50	-25	$\mu\text{A}$
Discharging current	$I_{DCH}$	$V_{CC} = 5 \text{ V}$ , $FC = 2.5 \text{ V}$	25	50	100	$\mu\text{A}$
<b>Lower side voltage detection circuit</b>						
Input to output gain	$G_{V1}$	$V_{CC} = 5 \text{ V}$	5	10	20	times
<b>SW-REG driving circuit</b>						
PNP driving current	$I_{SWB}$	$V_{CC} = 5 \text{ V}$	10	50	—	mA

- Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.


Parameter	Symbol	Conditions	Min	Typ	Max	Unit
<b>Thermal protection</b>						
Thermal protection operating temperature	$T_{SDON}$	$V_{CC} = 5 \text{ V}$ , $\Delta EC = 100 \text{ mV}$	—	170	—	°C
Thermal protection hysteresis width	$\Delta T_{SD}$	$V_{CC} = 5 \text{ V}$ , $\Delta EC = 100 \text{ mV}$	—	45	—	°C

## ■ Usage Notes

Prevent this IC from being line-to-ground fault. (To be concrete, do not short-circuit any of pins A1 (pin 27), A2 (pin 26) and A3 (pin 25) to V<sub>REG</sub> pin (pin 19) or VM pin (pin 20).)


## ■ Application Notes

- P<sub>D</sub> — T<sub>a</sub> curves of HSOP042-P-0400

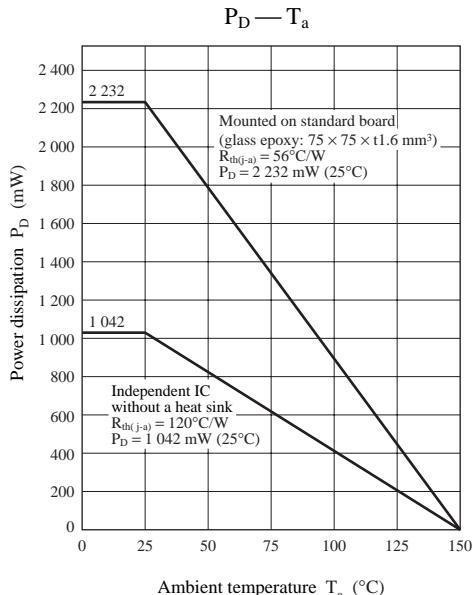

- Phase conditions between Hall input and output current

Phase of Hall pin			
	H1+	H2+	H3+
A	H	M	L
B	H	L	M
C	M	L	H
D	L	M	H
E	L	H	M
F	M	H	L

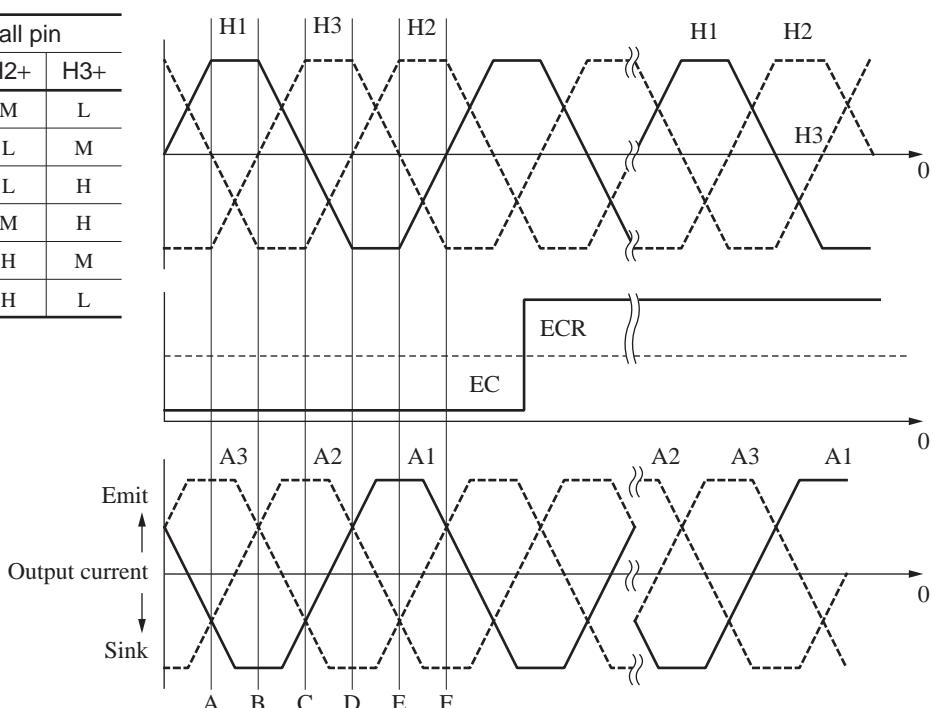

## ■ Application Circuit Example

