


# MAZL062D

Silicon planer type

Constant voltage, constant current, waveform  
ripper and surge absorption circuit

## ■ Features

- Mini type package (5-pin)
- Four anode-common element wiring of MA8062

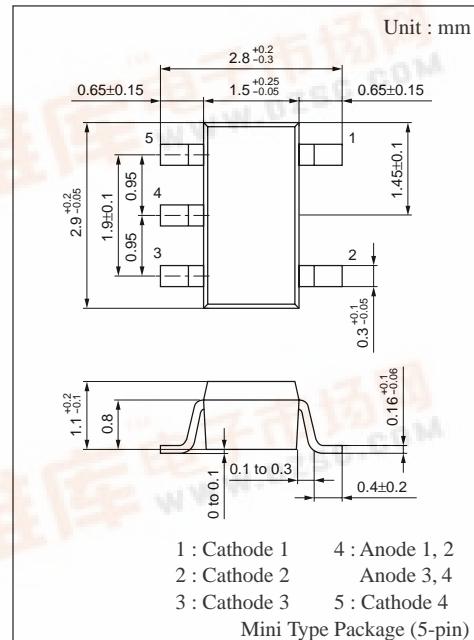


## ■ Absolute Maximum Ratings (Ta= 25°C)

Parameter	Symbol	Rating	Unit
Average forward current	I <sub>F(AV)</sub>	100 * <sup>1</sup>	mA
Instantaneous forward current	I <sub>FRM</sub>	200 * <sup>1</sup>	mA
Total power dissipation	P <sub>tot</sub> * <sup>2</sup>	200 * <sup>1</sup>	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	- 55 to + 150	°C

\*<sup>1</sup> Working value in a single piece

\*<sup>2</sup> With a printed-circuit board

## ■ Internal Connection



## ■ Electrical Characteristics (Ta= 25°C)\*<sup>1</sup>

Parameter	Symbol	Condition	min	typ	max	Unit
Forward voltage	V <sub>F</sub>	I <sub>F</sub> =10mA		0.9	1.0	V
Zener voltage	V <sub>Z</sub> * <sup>2</sup>	I <sub>Z</sub> = 5mA	5.80	6.20	6.60	V
Operating resistance	R <sub>ZK</sub>	I <sub>Z</sub> = 0.5mA			100	Ω
	R <sub>Z</sub>	I <sub>Z</sub> = 5mA			30	Ω
Reverse current	I <sub>R</sub>	V <sub>R</sub> = 4V			0.2	μA
Temperature coefficient of zener voltage	S <sub>Z</sub> * <sup>3</sup>	I <sub>Z</sub> = 5mA		2.3		mV/°C
Terminal capacitance	C <sub>t</sub>	V <sub>R</sub> = 0V, f=1MHz			50	pF

Note 1. Test method : Depend on JIS C7031 testing

2. Rated input/output frequency : 5MHz


3. \*<sup>1</sup> : The V<sub>Z</sub> value is for the temperature of 25°C. In other cases, carry out the temperature compensation.

\*<sup>2</sup> : Guaranteed at 20ms after power application


\*<sup>3</sup> : T<sub>j</sub>= 25 to 150°C

## ■ Marking


$P_{\text{tot}} - T_a$

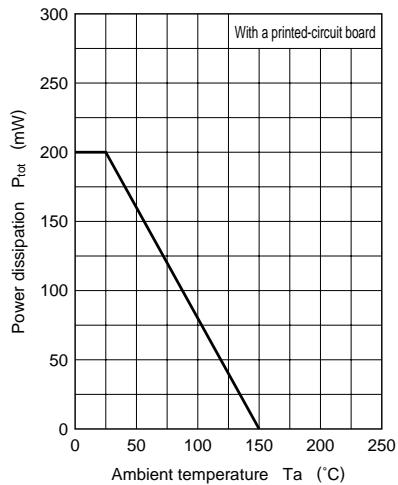


$I_F - V_F$

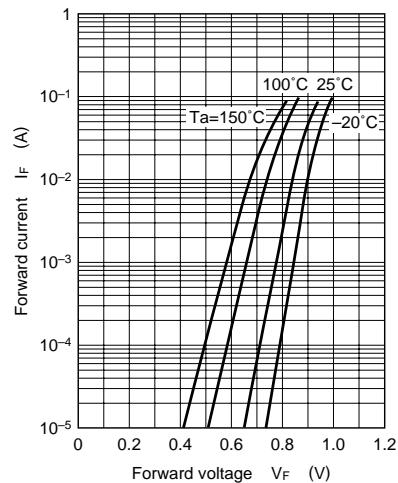


$I_Z - V_Z$

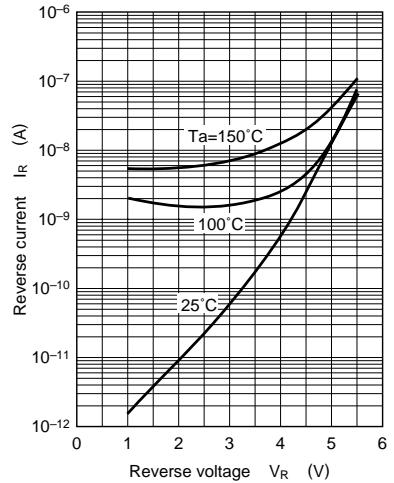

$I_R - V_R$

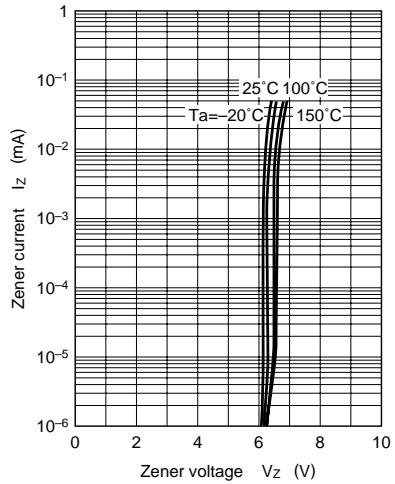

$R_Z - I_Z$

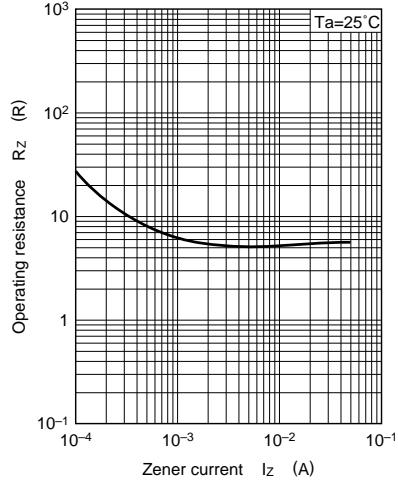

$C_t - V_R$

