

T-45-23-21

February 1991
Edition 1.0

FUJITSU


DATA SHEET

MB86040

CMOS PIPELINED DIVIDER WITH 10-BIT DIVIDEND, 8-BIT DIVISOR, AND 10-BIT QUOTIENT

The MB86040 is a high-speed CMOS pipe-lined divider designed for high-speed image signal processing.
The MB86040 operates at up to 10MHz and 10-bit quotient is generated with 10-bit dividend and 8-bit divisor.

- Single supply voltage: $+5V \pm 5\%$
- Clock cycle time: 100ns min.
- Data format: Positive fixed point decimal number
- Pipeline configuration
- Divided by zero error detection function



PLASTIC PACKAGE
DIP-40P-M01


ABSOLUTE MAXIMUM RATINGS (see NOTE)

$V_{DD} = 0V$

Rating	Symbol	Conditions	Value	Unit
Supply voltage	V_{DD}	-	$V_{DD} - 0.5$ to $+6.0$	V
Input voltage	V_I	-	$V_{DD} - 0.5$ to $V_{DD} + 0.5$	V
Output voltage	V_O	-	$V_{DD} - 0.5$ to $V_{DD} + 0.5$	V
Operating temperature	T_A	-	-25 to $+85$	$^{\circ}C$
Storage temperature	T_{STG}	-	-40 to $+125$	$^{\circ}C$
Output current (1)	I_O	$V_O = V_{DD}$	$+70$ (Maximum)	mA
		$V_O = 0V$	-40 (Maximum)	

(1) This is the output current per pin for $V_{DD} = 5V$ and for a maximum of 1 second.

PIN ASSIGNMENT

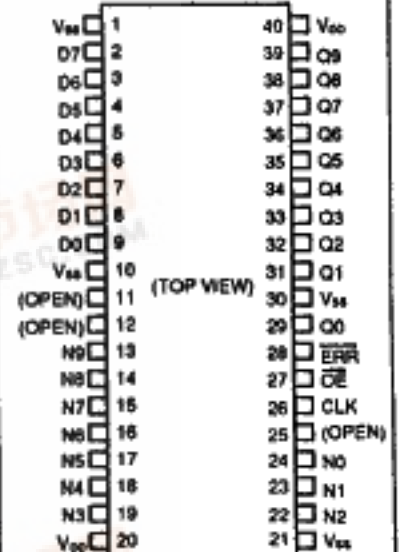

NOTE: Permanent device damage may occur if the above Absolute Maximum Ratings are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


The device contains circuitry to protect the inputs against damage due to high static voltages or electric fields. However, it is advised that normal precautions be taken to avoid exposure of any voltage higher than maximum rated voltages to the high impedance circuit.

Copyright © 1991 by FUJITSU LIMITED

T-45-23-21

MB86040

BLOCK DIAGRAM

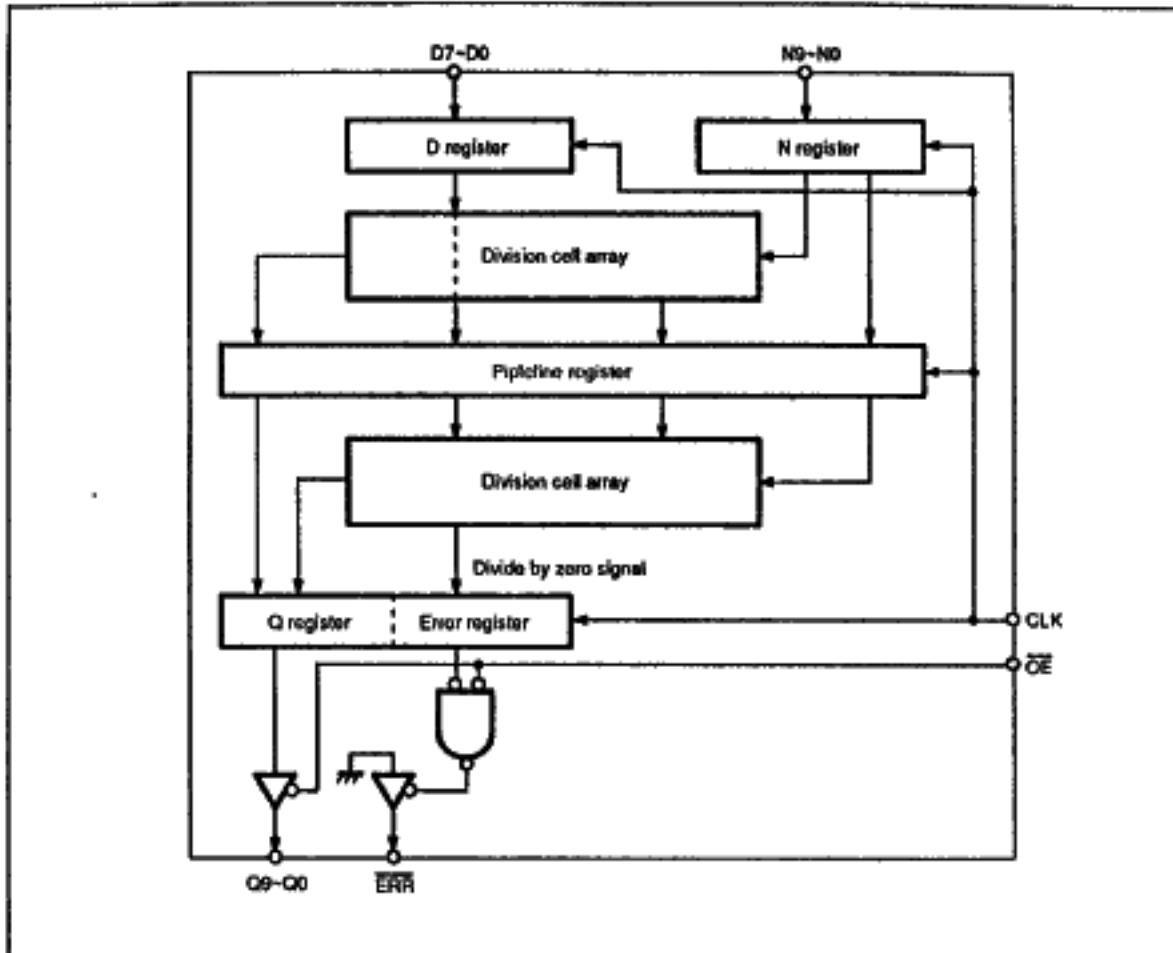

DATA FORMAT

Dividend: N	N9	N8	N7	N6	N5	N4	N3	N2	N1	N0
	2^9	2^8	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0

Divisor: D	D7	D6	D5	D4	D3	D2	D1	D0
	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0

Quotient: Q	Q9	Q8	Q7	Q6	Q5	Q4	Q3	Q2	Q1	Q0
	2^9	2^8	2^7	2^6	2^5	2^4	2^3	2^2	2^1	2^0

T-45-23-21

MB86040

PIN DESCRIPTIONS


Pin No.	Symbol	IO	Descriptions
13~19 22~24	N9~N0	I	Dividend input pins. (Positive fixed point decimal number: 10-bit) MSB: N9 LSB: N0
2~9	D7~D0	I	Divisor input pins. (Positive fixed point decimal number: 8-bit) MSB: D7 LSB: D0
39~31 29	Q9~Q0	O	Quotient output pins. (Positive fixed point decimal number: 10-bit) MSB: Q9 (Three-state output) LSB: Q0
26	CLK	I	Clock input pin for the pipeline register. Data is latched on the rising edge of clock.
27	$\overline{OE}$	I	Q0 to Q9, $\overline{ERR}$ pins output enable signal input pin When low, output pins are enabled. When high, output pins are set to high impedance.
28	$\overline{ERR}$	O	Error flag output pin. Goes low on detection of divide by zero when $\overline{OE}$ pin is low. The others case, goes to high impedance. (Open drain output)
20 40	V _{cc}	—	Supply voltage input (+5V) Connect all V _{cc} pins to the power supply line.
1, 10 21, 30	V _{ss}	—	Ground Connect all V _{ss} pins to network ground.
11, 12, 25	(OPEN)	—	No connection

MB86040

OPERATION DESCRIPTIONS

- The high speed operation technique and pipeline method enable 10MHz max operation speed.
- The MB86040 uses 2-stage pipeline method. The output delayed 3 cycles after input. The min output delay is 100ns. (See Figure-1)
- Input/output data is positive fixed point decimal number.
- When operation divided by zero is done ($D_n = "0"$), all bit of quotient (Q_n) becomes "1". $\overline{ERR}$ signal becomes low while this cycle.
- The residue is not output, the residue is omitted.

Fig. 1 - TIMING CHART

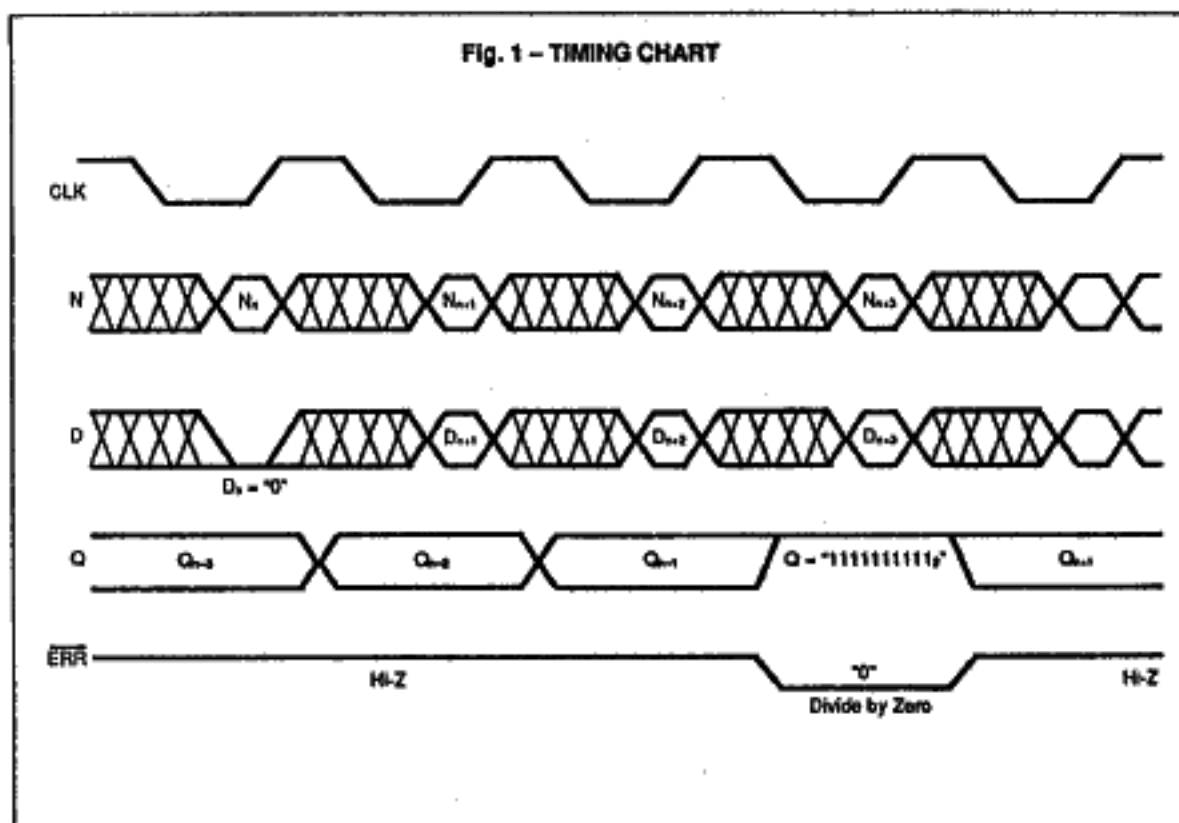

T-45-23-21

MB86040

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Supply voltage	V_{DD}	—	4.75	5.00	5.25	V
Operating temperature	T_A	—	0	—	70	°C
High-level output current	I_{OH}	—	—	—	-2	mA
Low-level output current	I_{OL}	—	—	—	3.2	mA

DC CHARACTERISTICS

Parameter	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Supply current	I_{DD}	Static $V_H = V_{DD}, V_L = V_{SS}$	—	—	0.1	mA
High-level input voltage	V_{HI}	—	2.2	—	—	V
Low-level input voltage	V_{LI}	—	—	—	0.8	V
High-level output voltage	V_{OH}	$I_{OH} = -2\text{mA}$	4.0	—	V_{DD}	V
Low-level output voltage	V_{OL}	$I_{OL} = 3.2\text{mA}$	V_{SS}	—	0.4	V
Input leakage current	I_{ii}	$V_i = 0\text{V to } V_{DD}$	-10	—	10	μA

AC CHARACTERISTICS

Parameter	Symbol	Value			Unit
		Min	Typ	Max	
CLK cycle	t_{CC}	100	—	—	ns
CLK pulse width	t_{CW}	15	—	—	ns
N9-N0, D7-D0 set-up time	t_{SU}	15	—	—	ns
N9-N0, D7-D0 hold time	t_{HO}	15	—	—	ns
Q9-Q0, $\overline{\text{ERR}}$ hold time	t_{HH}	3	—	—	ns
Q9-Q0, $\overline{\text{ERR}}$ data valid delay time	t_{DV}	—	—	45	ns
Q9-Q0, $\overline{\text{ERR}}$ data valid delay time (from $\overline{\text{OE}}$)	t_{DVE}	0	—	40	ns
Q9-Q0, $\overline{\text{ERR}}$ data float delay time	t_{DF}	0	—	40	ns

Note: The AC Characteristics are guaranteed under the signal waveform shown on page 6.

