





## BCP28, BCP48

### PNP Silicon Darlington Transistors

- For general AF applications
- High collector current
- High current gain
- Complementary types: BCP29/49 (NPN)



EHA00008

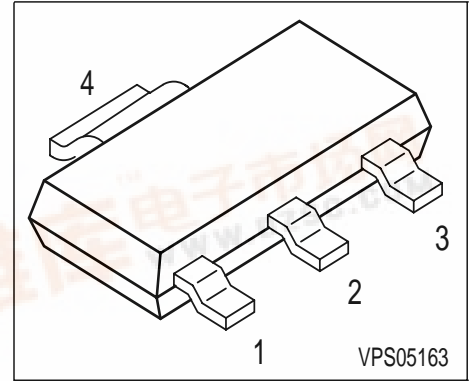

Type	Marking	Pin Configuration				Package
BCP28	BCP 28	1 = B	2 = C	3 = E	4 = C	SOT223
BCP48	BCP 48	1 = B	2 = C	3 = E	4 = C	SOT223

### Maximum Ratings

Parameter	Symbol	BCP28	BCP48	Unit
Collector-emitter voltage	$V_{CEO}$	30	60	V
Collector-base voltage	$V_{CBO}$	40	80	V
Emitter-base voltage	$V_{EBO}$	10	10	V
DC collector current	$I_C$	500		mA
Peak collector current	$I_{CM}$	800		mA
Base current	$I_B$	100		mA
Peak base current	$I_{BM}$	200		mA
Total power dissipation, $T_S = 124\text{ °C}$	$P_{tot}$	1.5		W
Junction temperature	$T_j$	150		°C
Storage temperature	$T_{stg}$	-65 ... 150		°C

### Thermal Resistance

Junction - soldering point <sup>1)</sup>	$R_{thJS}$	≤17	K/W
--	------------	-----	-----

<sup>1)</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 1 \text{ mA}, I_B = 0$	$V_{(BR)CEO}$				V
BCP28		30	-	-	
BCP48		60	-	-	
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_E = 0$	$V_{(BR)CBO}$				
BCP28		40	-	-	
BCP48		80	-	-	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$	$V_{(BR)EBO}$	10	-	-	
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0$	$I_{CBO}$				nA
BCP28		-	-	100	
$V_{CB} = 60 \text{ V}, I_E = 0$					
BCP48		-	-	100	
Collector cutoff current $V_{CB} = 30 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	$I_{CBO}$				$\mu\text{A}$
BCP28		-	-	10	
$V_{CB} = 60 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$					
BCP48		-	-	10	
Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$	$I_{EBO}$	-	-	100	nA
DC current gain 1) $I_C = 100 \mu\text{A}, V_{CE} = 1 \text{ V}$	$h_{FE}$				-
BCP28		4000	-	-	
BCP48		2000	-	-	
DC current gain 1) $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{FE}$				
BCP28		10000	-	-	
BCP48		4000	-	-	
DC current gain 1) $I_C = 100 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{FE}$				
BCP28		20000	-	-	
BCP48		10000	-	-	
DC current gain 1) $I_C = 500 \text{ mA}, V_{CE} = 5 \text{ V}$	$h_{FE}$				
BCP28		4000	-	-	
BCP48		2000	-	-	


1) Pulse test:  $t \leq 300 \mu\text{s}$ ,  $D = 2\%$

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter saturation voltage <sup>1)</sup> $I_C = 100\text{ mA}, I_B = 0.1\text{ mA}$	$V_{CEsat}$	-	-	1	V
Base-emitter saturation voltage 1) $I_C = 100\text{ mA}, I_B = 0.1\text{ mA}$	$V_{BEsat}$	-	-	1.5	
<b>AC Characteristics</b>					
Transition frequency $I_C = 50\text{ mA}, V_{CE} = 5\text{ V}, f = 100\text{ MHz}$	$f_T$	-	200	-	MHz
Collector-base capacitance $V_{CB} = 10\text{ V}, f = 1\text{ MHz}$	$C_{cb}$	-	8	-	pF


1) Pulse test:  $t \leq 300\mu\text{s}$ ,  $D = 2\%$

**Total power dissipation  $P_{tot} = f(T_S)$**

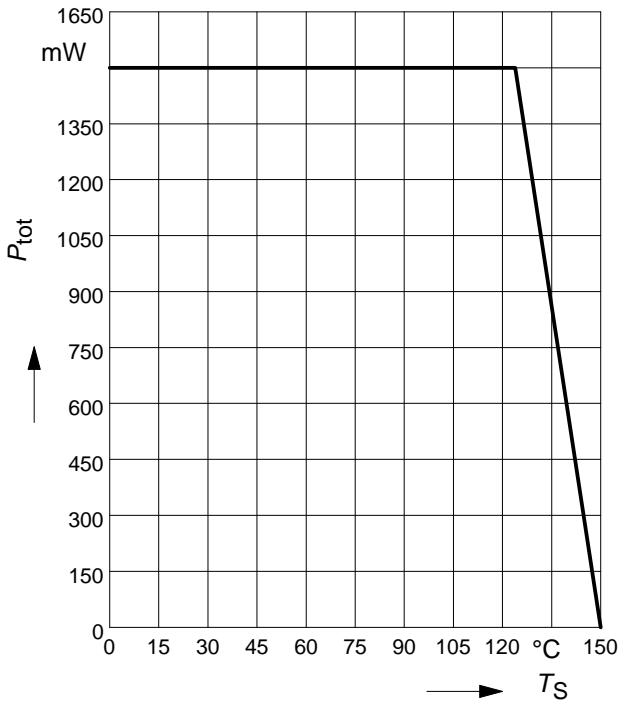


**Collector cutoff current  $I_{CBO} = f(T_A)$**

$V_{CB} = V_{CEmax}$

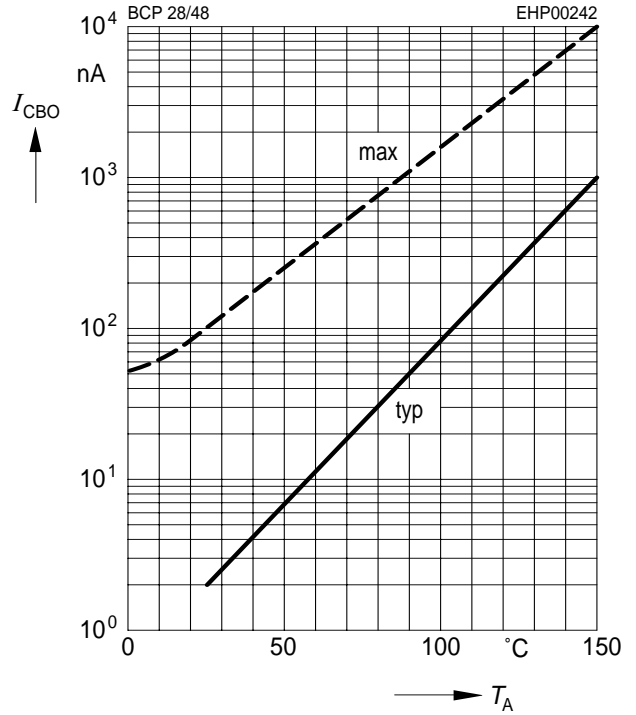


**Transition frequency  $f_T = f(I_C)$**

$V_{CE} = 5V$

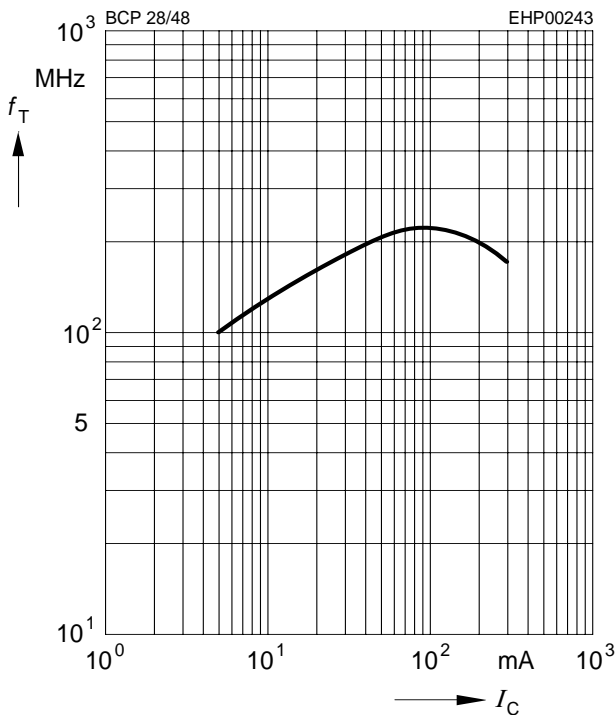


**Permissible pulse load**

$P_{totmax} / P_{totDC} = f(t_p)$

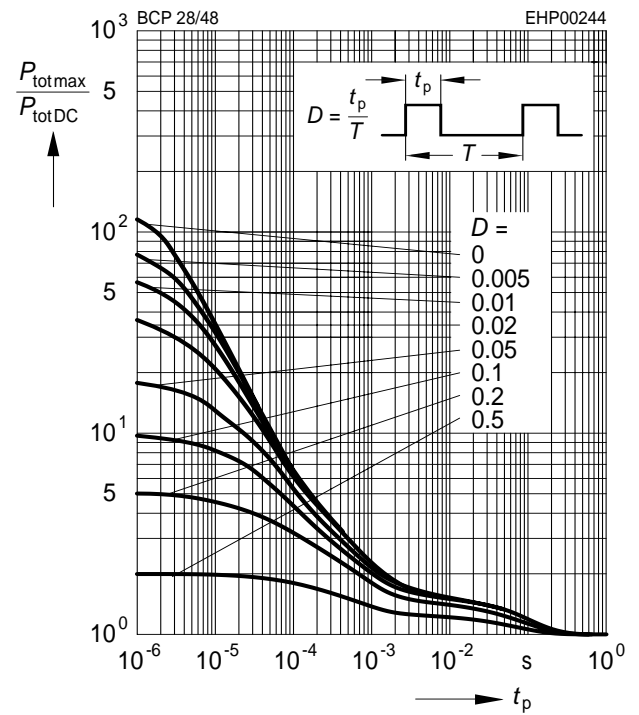


**DC current gain  $h_{FE} = f(I_C)$**

$V_{CE} = 5V$

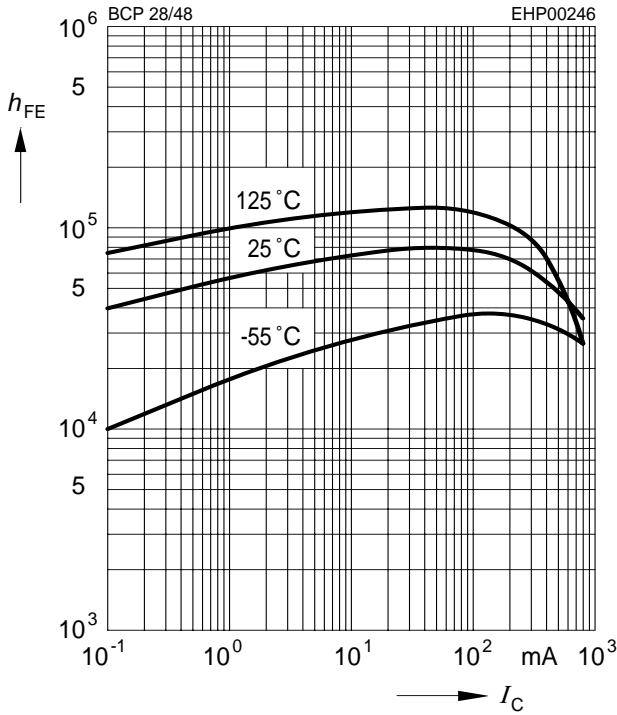


**Collector-emitter saturation voltage**

$I_C = f(V_{CEsat}), h_{FE} = 1000$

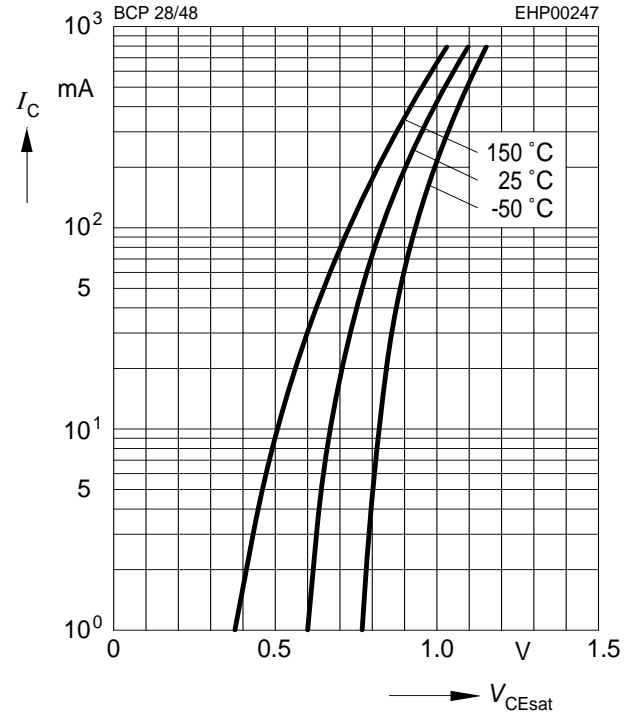

**Collector-base capacitance  $C_{CB} = f(V_{CB0})$**

**Emitter-base capacitance  $C_{EB} = f(V_{EB0})$**

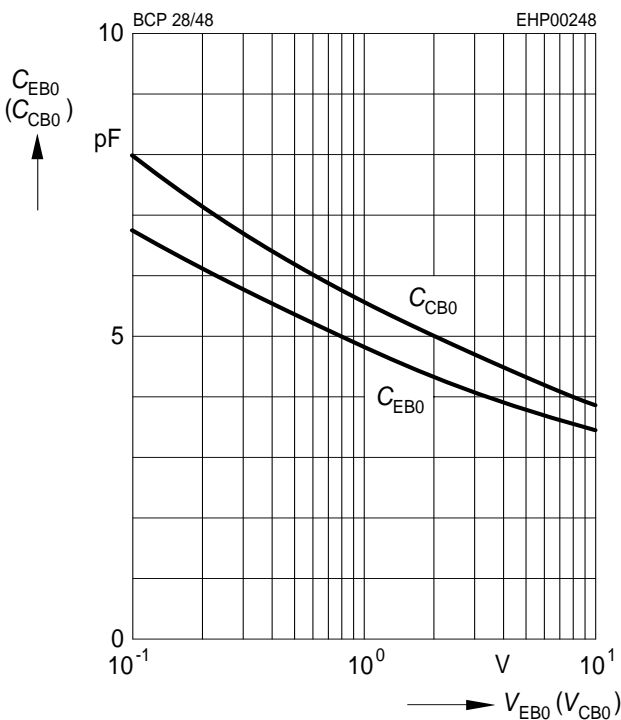

**Base-emitter saturation voltage**

$I_C = f(V_{BEsat}), h_{FE} = 1000$

