




## PNP Silicon AF an Swiching Transistors

- For general AF applications
- High breakdown voltage
- Low collector-emitter saturation voltage
- Complementary types: BCX41, BSS64 (NPN)

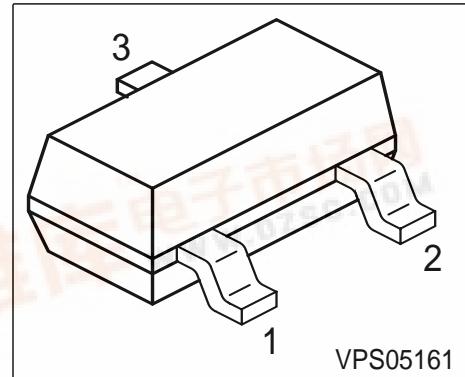

Type	Marking	Pin Configuration			Package
BCX42	DKs	1 = B	2 = E	3 = C	SOT23
BSS63	BMs	1 = B	2 = E	3 = C	SOT23

### Maximum Ratings

Parameter	Symbol	BSS63	BCX42	Unit
Collector-emitter voltage	$V_{CEO}$	100	125	V
Collector-base voltage	$V_{CBO}$	110	125	
Emitter-base voltage	$V_{EBO}$	5	5	
DC collector current	$I_C$	800		mA
Peak collector current	$I_{CM}$		1	A
Base current	$I_B$	100		mA
Peak base current	$I_{BM}$	200		
Total power dissipation, $T_S = 79^\circ\text{C}$	$P_{tot}$	330		mW
Junction temperature	$T_j$	150		$^\circ\text{C}$
Storage temperature	$T_{Stg}$	-65 ... 150		

### Thermal Resistance

Junction - soldering point <sup>1)</sup>	$R_{thJS}$	$\leq 215$	K/W
--	------------	------------	-----

<sup>1</sup>For calculation of  $R_{thJA}$  please refer to Application Note Thermal Resistance

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


<b>Parameter</b>	<b>Symbol</b>	<b>Values</b>			<b>Unit</b>
		<b>min.</b>	<b>typ.</b>	<b>max.</b>	
<b>DC Characteristics</b>					
Collector-emitter breakdown voltage $I_C = 10 \text{ mA}, I_B = 0$	BSS63 BCX42	$V_{(\text{BR})\text{CEO}}$	100 125	- -	V
Collector-base breakdown voltage $I_C = 100 \mu\text{A}, I_B = 0$	BSS63 BCX42	$V_{(\text{BR})\text{CBO}}$	110 125	- -	
Emitter-base breakdown voltage $I_E = 10 \mu\text{A}, I_C = 0$		$V_{(\text{BR})\text{EBO}}$	5	- -	
Collector cutoff current $V_{CB} = 80 \text{ V}, I_E = 0$ $V_{CB} = 100 \text{ V}, I_E = 0$	BSS63 BCX42	$I_{\text{CBO}}$	- -	- -	nA 100 100
Collector cutoff current $V_{CB} = 80 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$ $V_{CB} = 100 \text{ V}, I_E = 0, T_A = 150^\circ\text{C}$	BSS63 BCX42	$I_{\text{CBO}}$	- -	- -	20 20
Emitter cutoff current $V_{EB} = 4 \text{ V}, I_C = 0$		$I_{\text{EBO}}$	-	-	100 nA
Collector cutoff current $V_{CE} = 100 \text{ V}, T_A = 85^\circ\text{C}$ $V_{CE} = 100 \text{ V}, T_A = 125^\circ\text{C}$	BCX42 BCX42	$I_{\text{CEO}}$	- -	- -	10 75
DC current gain 1) $I_C = 100 \mu\text{A}, V_{CE} = 1 \text{ V}$ $I_C = 10 \text{ mA}, V_{CE} = 5 \text{ V}$ $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}$ $I_C = 100 \text{ mA}, V_{CE} = 1 \text{ V}$ $I_C = 200 \text{ mA}, V_{CE} = 1 \text{ V}$	BCX42 BSS63 BSS63 BCX42 BCX42	$h_{FE}$	25 30 30 63 40	- - - - -	-

1) Pulse test:  $t \leq 300 \mu\text{s}$ ,  $D = 2\%$

**Electrical Characteristics** at  $T_A = 25^\circ\text{C}$ , unless otherwise specified.


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>DC Characteristics</b>					
Collector-emitter saturation voltage1) $I_C = 300 \text{ mA}, I_B = 30 \text{ mA}$	$V_{CEsat}$	-	-	0.9	V
$I_C = 25 \text{ mA}, I_B = 2.5 \text{ mA}$	BCX42	-	-	0.25	
$I_C = 75 \text{ mA}, I_B = 7.5 \text{ mA}$	BSS63	-	-	0.9	
Base-emitter saturation voltage 1) $I_C = 300 \text{ mA}, I_B = 30 \text{ mA}$	$V_{BEsat}$	-	-	1.4	
<b>AC Characteristics</b>					
Transition frequency $I_C = 20 \text{ mA}, V_{CE} = 5 \text{ V}, f = 20 \text{ MHz}$	$f_T$	-	150	-	MHz
Collector-base capacitance $V_{CB} = 10 \text{ V}, f = 1 \text{ MHz}$	$C_{cb}$	-	12	-	pF

**Total power dissipation**  $P_{\text{tot}} = f(T_S)$

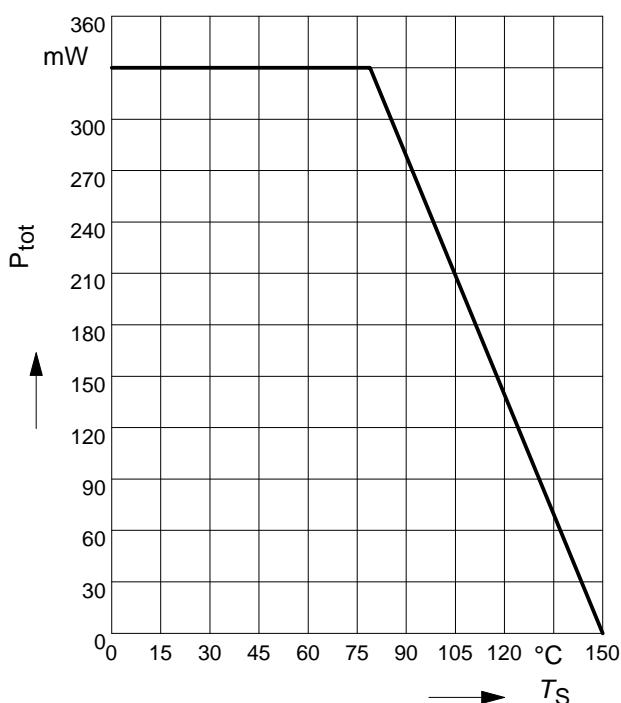


**Collector current**  $I_C = f(V_{BE})$

$V_{CE} = 1V$

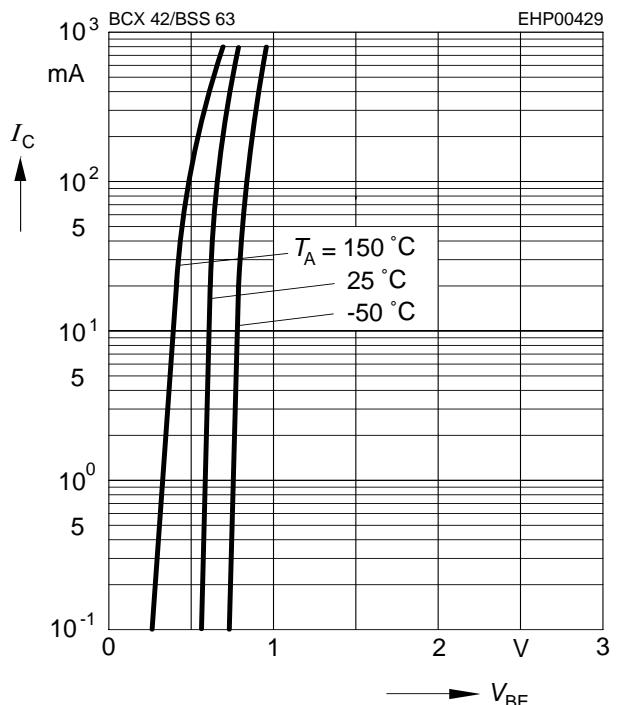


**Permissible pulse load**

$P_{\text{totmax}} / P_{\text{totDC}} = f(t_p)$

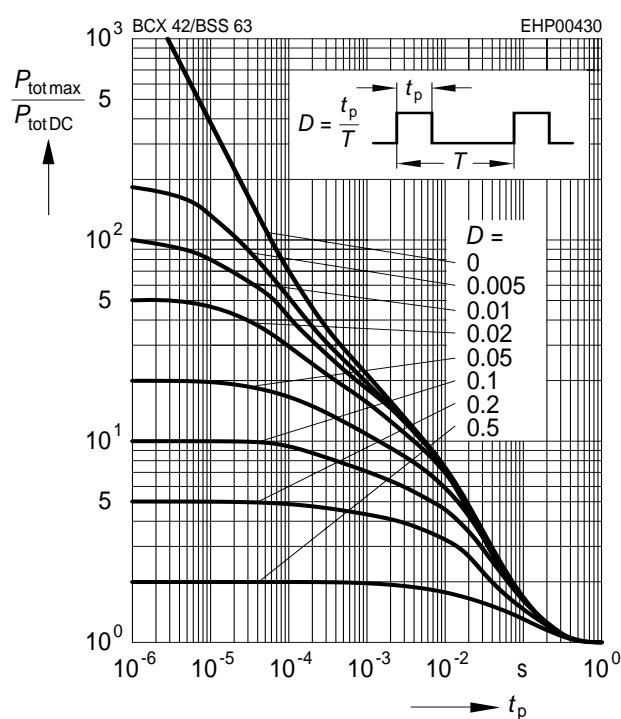


**Transition frequency**  $f_T = f(I_C)$

$V_{CE} = 5V$

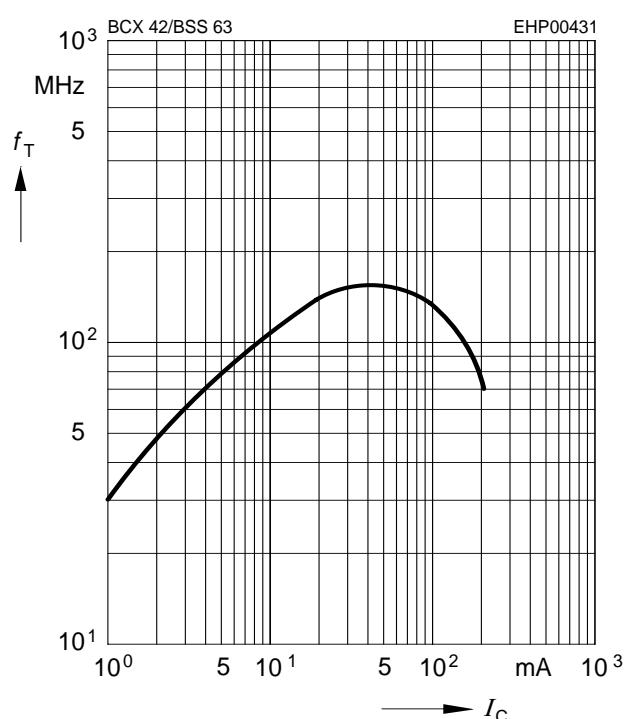


**Base-emitter saturation voltage**


$$I_C = f(V_{BEsat}), h_{FE} = 10$$

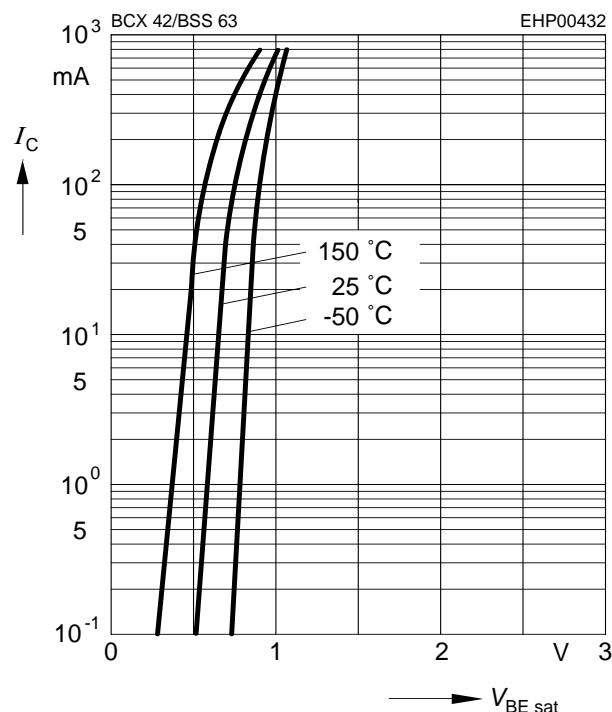
**Collector cutoff current  $I_{CBO} = f(T_A)$** 

$$V_{CB} = 100V$$

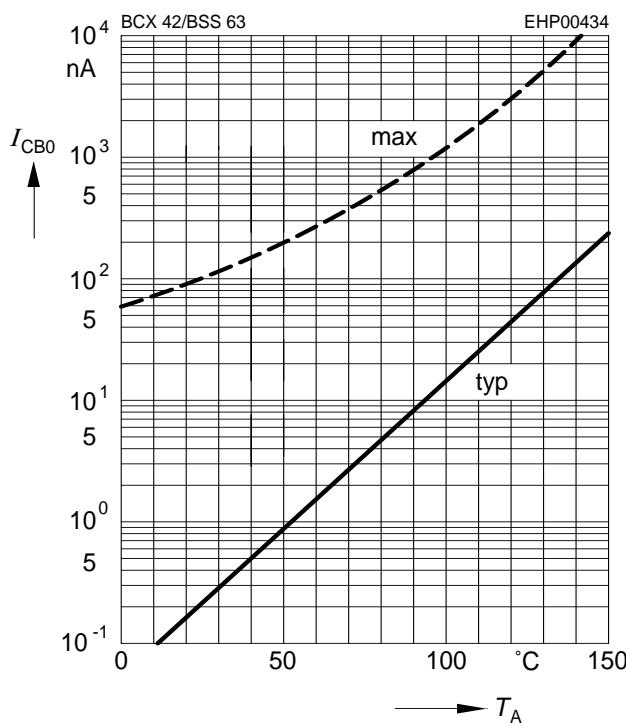
**Collector-emitter saturation voltage**

$$I_C = f(V_{CEsat}), h_{FE} = 10$$

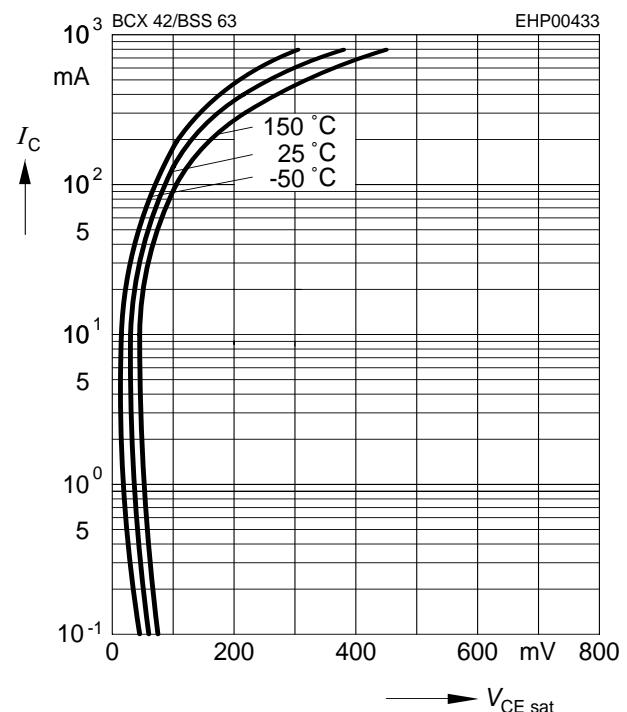
**DC current gain  $h_{FE} = f(I_C)$** 

$$V_{CE} = 1V$$

