



BFP183T/BFP183TW/BFP183TRW

Vishay Telefunken

Silicon NPN Planar RF Transistor

Electrostatic sensitive device.

Observe precautions for handling.





Applications

For low noise and high gain broadband amplifiers at collector currents from 2 mA to 30 mA.

Features



- Low power applications
- Low noise figure
- High transition frequency $f_T = 8$ GHz



BFP183TW Marking: W83

Plastic case (SOT 343)



1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter



BFP183TRW Marking: WSH

Plastic case (SOT 343R)

1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter



BFP183T Marking: 83P

Plastic case (SOT 143)

1 = Collector, 2 = Emitter, 3 = Base, 4 = Emitter



BFP183T/BFP183TW/BFP183TRW



Vishay Telefunken

Absolute Maximum Ratings

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test Conditions | Symbol | Value | Unit |
|---------------------------|-----------------------------------|-----------|-------------|--------------------|
| Collector-base voltage | | V_{CBO} | 15 | V |
| Collector-emitter voltage | | V_{CEO} | 10 | V |
| Emitter-base voltage | | V_{EBO} | 2 | V |
| Collector current | | I_C | 65 | mA |
| Total power dissipation | $T_{amb} \leq 60^{\circ}\text{C}$ | P_{tot} | 200 | mW |
| Junction temperature | | T_j | 150 | $^{\circ}\text{C}$ |
| Storage temperature range | | T_{stg} | -65 to +150 | $^{\circ}\text{C}$ |

Maximum Thermal Resistance

$T_{amb} = 25^{\circ}\text{C}$, unless otherwise specified

| Parameter | Test Conditions | Symbol | Value | Unit |
|------------------|---|------------|-------|------|
| Junction ambient | on glass fibre printed board (25 x 20 x 1.5) mm ³ plated with 35µm Cu | R_{thJA} | 450 | K/W |



BFP183T/BFP183TW/BFP183TRW

Vishay Telefunken

Electrical DC Characteristics

T_{amb} = 25°C, unless otherwise specified

| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|--------------------------------------|---|----------------------|-----|-----|-----|------|
| Collector cut-off current | V _{CE} = 15 V, V _{BE} = 0 | I _{CES} | | | 100 | μA |
| Collector-base cut-off current | V _{CB} = 10 V, I _E = 0 | I _{CBO} | | | 100 | nA |
| Emitter-base cut-off current | V _{EB} = 1 V, I _C = 0 | I _{EBO} | | | 1 | μA |
| Collector-emitter breakdown voltage | I _C = 1 mA, I _B = 0 | V _{(BR)CEO} | 10 | | | V |
| Collector-emitter saturation voltage | I _C = 30 mA, I _B = 3 mA | V _{CEsat} | | 0.1 | 0.4 | V |
| DC forward current transfer ratio | V _{CE} = 6 V, I _C = 5 mA | h _{FE} | 50 | 90 | 150 | |
| | V _{CE} = 8 V, I _C = 20 mA | h _{FE} | 50 | 110 | | |

Electrical AC Characteristics

T_{amb} = 25°C, unless otherwise specified




| Parameter | Test Conditions | Symbol | Min | Typ | Max | Unit |
|-------------------------------|--|---------------------------------|-----|------|-----|------|
| Transition frequency | V _{CE} = 8 V, I _C = 15 mA, f = 500 MHz | f _T | 6 | 7.2 | | GHz |
| | V _{CE} = 8 V, I _C = 30 mA, f = 500 MHz | f _T | | 8 | | GHz |
| Collector-base capacitance | V _{CB} = 10 V, f = 1 MHz | C _{cb} | | 0.4 | | pF |
| Collector-emitter capacitance | V _{CE} = 8 V, f = 1 MHz | C _{ce} | | 0.3 | | pF |
| Emitter-base capacitance | V _{EB} = 0.5 V, f = 1 MHz | C _{eb} | | 0.9 | | pF |
| Noise figure | V _{CE} = 6 V, I _C = 5 mA, Z _S = 75 Ω, f = 10 MHz | F | | 0.9 | | dB |
| | V _{CE} = 6 V, I _C = 5 mA, Z _S = Z _{Sopt} , f = 900 MHz | F | | 1.2 | | dB |
| | V _{CE} = 6 V, I _C = 5 mA, Z _S = Z _{Sopt} , f = 2 GHz | F | | 1.8 | | dB |
| Power gain | V _{CE} = 8 V, I _C = 15 mA, Z _S = Z _{Sopt} , Z _L = Z _{Lopt} , f = 900 MHz | G _{pe} | | 21 | | dB |
| | V _{CE} = 8 V, I _C = 15 mA, Z _S = 50 Ω, Z _L = Z _{Lopt} , f = 2 GHz | G _{pe} | | 12.5 | | dB |
| Transducer gain | V _{CE} = 8 V, I _C = 15 mA, Z ₀ = 50 Ω, f = 900 MHz | S _{21e} ² | | 16.5 | | dB |

BFP183T/BFP183TW/BFP183TRW

Vishay Telefunken






Dimensions of BFP183TW in mm

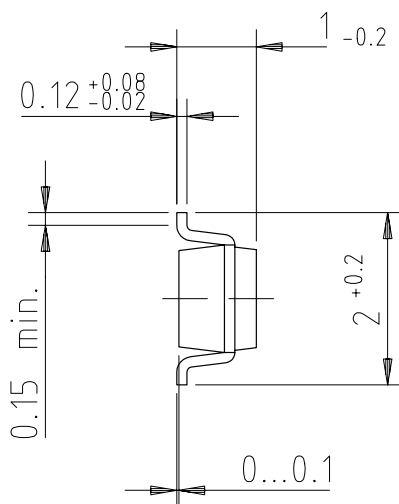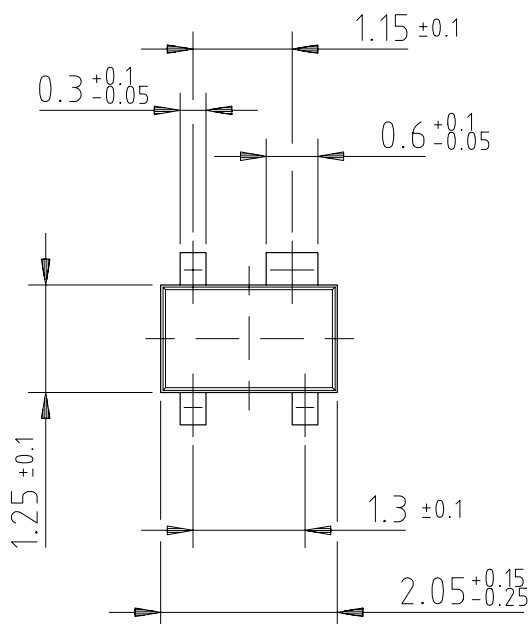

technical drawings
according to DIN
specifications

96 12237

Dimensions of BFP183TRW in mm

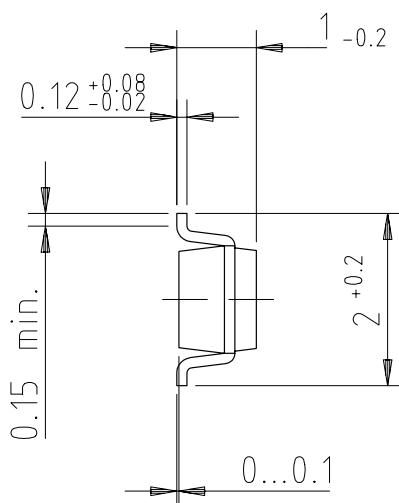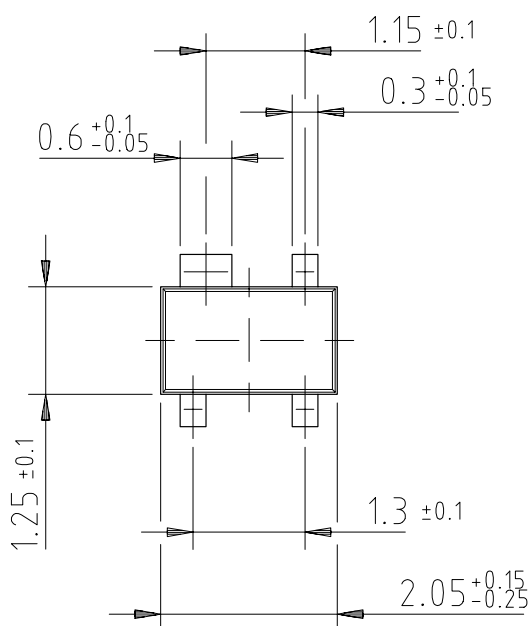

technical drawings
according to DIN
specifications



96 12238




BFP183T/BFP183TW/BFP183TRW

Vishay Telefunken

Dimensions of BFP183T in mm

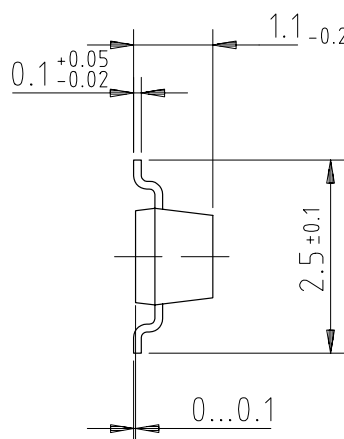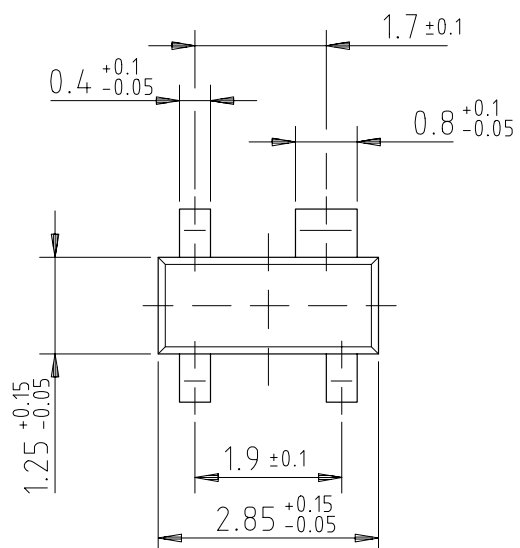

96 12240



technical drawings
according to DIN
specifications



Ozone Depleting Substances Policy Statement

It is the policy of **Vishay Semiconductor GmbH** to

1. Meet all present and future national and international statutory requirements.
2. Regularly and continuously improve the performance of our products, processes, distribution and operating systems with respect to their impact on the health and safety of our employees and the public, as well as their impact on the environment.

It is particular concern to control or eliminate releases of those substances into the atmosphere which are known as ozone depleting substances (ODSs).

The Montreal Protocol (1987) and its London Amendments (1990) intend to severely restrict the use of ODSs and forbid their use within the next ten years. Various national and international initiatives are pressing for an earlier ban on these substances.

Vishay Semiconductor GmbH has been able to use its policy of continuous improvements to eliminate the use of ODSs listed in the following documents.

1. Annex A, B and list of transitional substances of the Montreal Protocol and the London Amendments respectively
2. Class I and II ozone depleting substances in the Clean Air Act Amendments of 1990 by the Environmental Protection Agency (EPA) in the USA
3. Council Decision 88/540/EEC and 91/690/EEC Annex A, B and C (transitional substances) respectively.

Vishay Semiconductor GmbH can certify that our semiconductors are not manufactured with ozone depleting substances and do not contain such substances.

We reserve the right to make changes to improve technical design and may do so without further notice.

Parameters can vary in different applications. All operating parameters must be validated for each customer application by the customer. Should the buyer use Vishay-Telefunken products for any unintended or unauthorized application, the buyer shall indemnify Vishay-Telefunken against all claims, costs, damages, and expenses, arising out of, directly or indirectly, any claim of personal damage, injury or death associated with such unintended or unauthorized use.

Vishay Semiconductor GmbH, P.O.B. 3535, D-74025 Heilbronn, Germany
Telephone: 49 (0)7131 67 2831, Fax number: 49 (0)7131 67 2423