查询BT137M-500E供应商

## 捷多邦,专业PCB打样工厂,24小时加急出货

Philips Semiconductors

### Triacs sensitive gate

**Product specification** 

## BT137S series E BT137M series E

#### GENERAL DESCRIPTION

Glass passivated, sensitive gate triacs in a plastic envelope, suitable for surface mounting, intended for use in general purpose bidirectional switching and phase control applications, where high sensitivity is required in all four quadrants.

#### **PINNING - SOT428**

PIN NUMBER	Standard S	Alternative M
1	MT1	gate
2	MT2	MT2
3	gate	MT1
tab	MT2	MT2

## QUICK REFERENCE DATA

SYMBOL PARAMETER		MAX.	MAX.	MAX.	UNIT
V <sub>DRM</sub> I <sub>T(RMS)</sub> I <sub>TSM</sub>	BT137S (or BT137M)- Repetitive peak off-state voltages RMS on-state current Non-repetitive peak on-state current	<b>500E</b> 500 8 65	<b>600E</b> 600 8 65	800E 800 8 65	V A A

#### PIN CONFIGURATION


tab

2

1

3

#### SYMBOL



#### LIMITING VALUES

Limiting values in accordance with the Absolute Maximum System (IEC 134).

WWW.DZSC

SYMBOL	PARAMETER	CONDITIONS	MIN.	da-	MAX.	0.0	UNIT
V <sub>DRM</sub>	Repetitive peak off-state voltages	- M18	15	<b>-500</b> 500 <sup>1</sup>	<b>-600</b> 600 <sup>1</sup>	<b>-800</b> 800	V
I <sub>T(RMS)</sub> I <sub>TSM</sub>	RMS on-state current Non-repetitive peak on-state current	full sine wave; $T_{mb} \le 102$ °C full sine wave; $T_j = 25$ °C prior to surge	-		8		A
	WWW.	t = 20 ms t = 16.7 ms	-		65 71		A
l <sup>2</sup> t dl <sub>T</sub> /dt	I <sup>2</sup> t for fusing Repetitive rate of rise of on-state current after	t = 10  ms t = 10  ms $I_{TM} = 12 \text{ A}; I_G = 0.2 \text{ A};$ $dI_G/dt = 0.2 \text{ A}/\mu\text{s}$	-		21	17.00	A A²s
	triggering	T2+ G+ T2+ G- T2- G- T2- G+	E	BWW	50 50 50 10	5C.CO	A/μs A/μs A/μs A/μs
I <sub>GM</sub> V <sub>GM</sub> Р <sub>GM</sub>	Peak gate current Peak gate voltage Peak gate power		-		2 5 5		Á V W
P <sub>G(AV)</sub> T <sub>stg</sub> T <sub>j</sub>	Average gate power Storage temperature Operating junction temperature	over any 20 ms period	-40 -		0.5 150 125		ပံ ဂိ

Although not recommended, off-state voltages up to 800V may be applied without damage, but the triac may switch to the on-state. The rate of rise of current should not exceed 6  $A/\mu s$ .

Triacs	BT137S series E
sensitive gate	BT137M series E

## THERMAL RESISTANCES

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
R <sub>th j-mb</sub> R <sub>th j-a</sub>	Thermal resistance junction to mounting base Thermal resistance junction to ambient	full cycle half cycle pcb (FR4) mounted; footprint as in Fig.14	- -	- - 75	2.0 2.4 -	K/W K/W K/W

## STATIC CHARACTERISTICS

 $T_i = 25$  °C unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
I <sub>GT</sub>	Gate trigger current	$V_{\rm D} = 12 \text{ V}; I_{\rm T} = 0.1 \text{ A}$				
01		T2+G+	- 1	2.5	10	mA
		T2+ G-	-	4.0	10	mA
		T2- G-	-	5.0	10	mA
		T2- G+	-	11	25	mA
I <sub>L</sub>	Latching current	$V_{\rm D} = 12 \text{ V}; I_{\rm GT} = 0.1 \text{ A}$				
	_	T2+ G+	-	3.0	25	mA
		T2+ G-	-	14	35	mA
		T2- G-	-	3.0	25	mA
		T2- G+	-	4.0	35	mA
I I <sub>H</sub>	Holding current	$V_{\rm D} = 12 \text{ V}; I_{\rm GT} = 0.1 \text{ A}$	-	2.5	20	mA
∣ I <sub>H</sub>   V <sub>T</sub>	On-state voltage	$I_{T} = 10 \text{ A}$	-	1.3	1.65	V
V <sub>GT</sub>	Gate trigger voltage	$V_{\rm D} = 12 \text{ V}; \text{ I}_{\rm T} = 0.1 \text{ A}$	-	0.7	1.5	V
		$V_{\rm D} = 400 \text{ V}; I_{\rm T} = 0.1 \text{ A}; T_{\rm i} = 125 \text{ °C}$	0.25	0.4	-	V
I <sub>D</sub>	Off-state leakage current	$V_D = V_{DRM(max)}, T_j = 125 °C$	-	0.1	0.5	mA


#### **DYNAMIC CHARACTERISTICS**

 $T_j = 25$  °C unless otherwise stated

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
dV <sub>D</sub> /dt	Critical rate of rise of off-state voltage	$V_{DM} = 67\% V_{DRM(max)}; T_j = 125 °C;$ exponential waveform; gate open circuit	-	50	-	V/µs
t <sub>gt</sub>		$I_{TM} = 12 \text{ A}; V_D = V_{DRM(max)}; I_G = 0.1 \text{ A}; dI_G/dt = 5 \text{ A}/\mu\text{s}$	-	2	-	μs

## Triacs sensitive gate


## BT137S series E BT137M series E

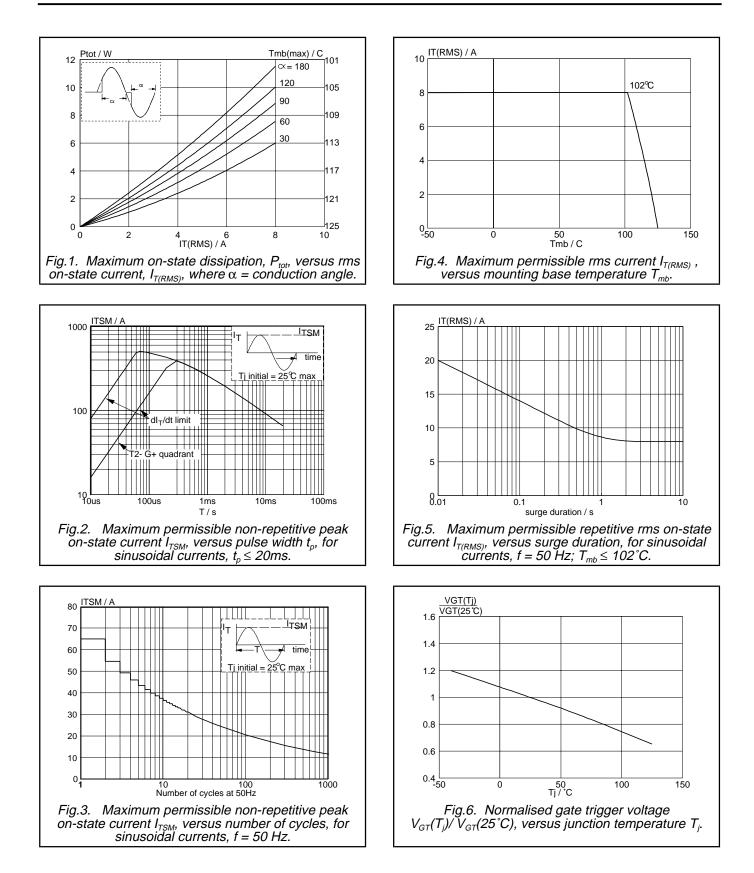

**Product specification** 

## Triacs sensitive gate

## BT137S series E BT137M series E

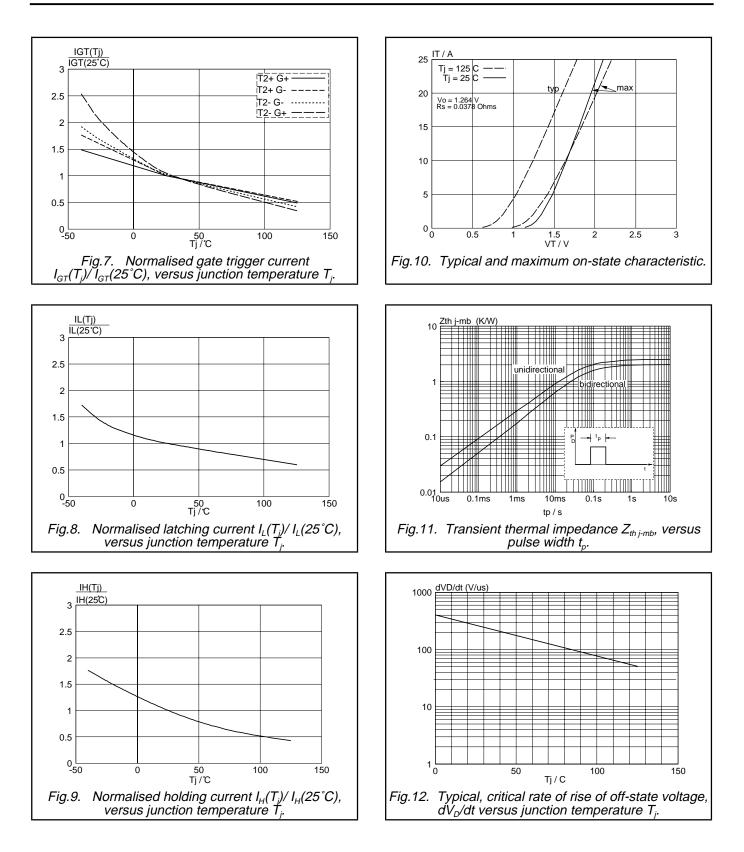


Triacs


BT137M series E

## BT137S series E sensitive gate

## **MECHANICAL DATA**

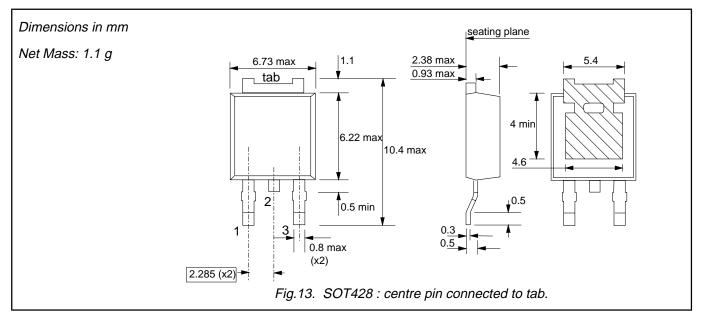

## **MOUNTING INSTRUCTIONS**

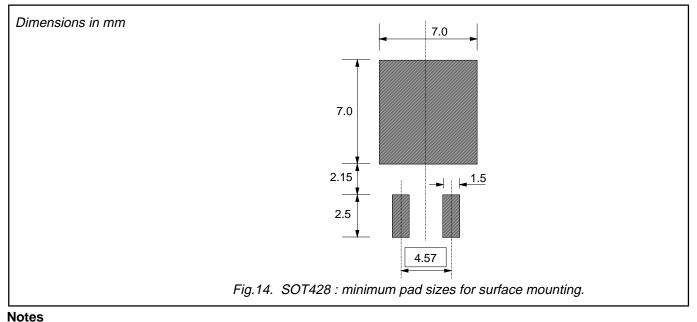

1. Plastic meets UL94 V0 at 1/8".

# Triacs BT137S series E BT137M series E

#### DEFINITIONS

Data sheet status					
Objective specification This data sheet contains target or goal specifications for product development.					
Preliminary specification This data sheet contains preliminary data; supplementary data may be published la					
Product specification	This data sheet contains final product specifications.				

#### Limiting values

Limiting values are given in accordance with the Absolute Maximum Rating System (IEC 134). Stress above one or more of the limiting values may cause permanent damage to the device. These are stress ratings only and operation of the device at these or at any other conditions above those given in the Characteristics sections of this specification is not implied. Exposure to limiting values for extended periods may affect device reliability.

#### **Application information**

Where application information is given, it is advisory and does not form part of the specification.

#### © Philips Electronics N.V. 1997

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner.

The information presented in this document does not form part of any quotation or contract, it is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent or other industrial or intellectual property rights.

#### LIFE SUPPORT APPLICATIONS

These products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Philips customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Philips for any damages resulting from such improper use or sale.